


Bobbin Packages

PQ3230

12-Terminal, THT, Vertical

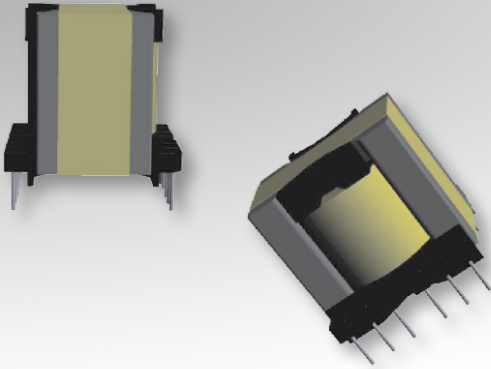

Characteristics:

This TH PQ3230 package was developed for functional insulation cases and compact footprint requirements. It features self-shielding cores for EMI improvement, large core cross-sectional area for high power density, and many terminals for multiple outputs, split coils, or parallel high current winds.

Applications:

- DC/DC converter
- Industrial controls
- Lighting
- White goods
- Telecom
- PFC


1

Technical Data:


Order Code	Type of Insulation	Winding Width (mm)	Winding Build (mm)	Winding Perimeter (mm)	A_c (mm ²)	L_e (mm)	V_e (mm ³)	Core Order Code (Power)
070-4796	Functional	18.69	5.26	50.27	167	74.7	12475	150-2411

Order Code	L (mm)	W (mm)	H (mm)	G (mm)
070-4796	35.56 max.	37.34 max.	34.29 max.	2.8 min.

Estimated Maximum Power Level:

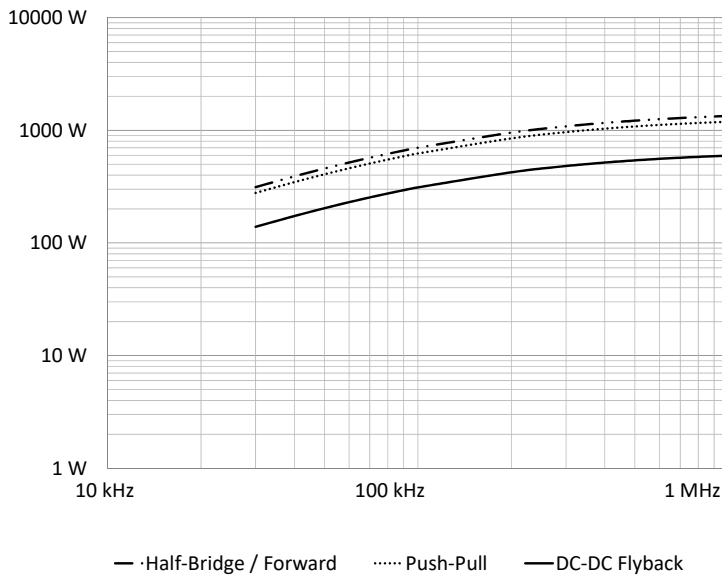

Dimensions:

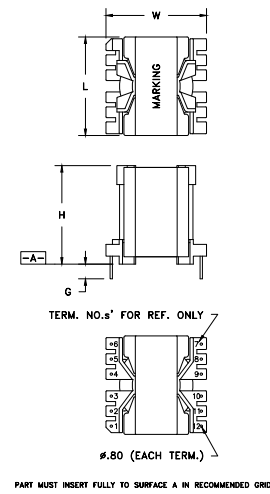

Footprint (mm):

