


# Bobbin Packages

## EPW15

9-Terminal, SMT, Horizontal

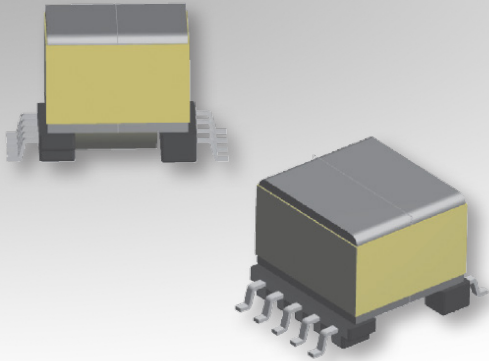

### Characteristics:

This SMT EPW15 package was developed for functional insulation cases and compact footprint requirements. It features self-shielding cores for EMI improvement, and large core cross-sectional area for high power density.

### Applications:


- DC/DC converter
- Industrial controls
- Lighting
- Metering
- White goods
- PoE
- Telecom
- DSL

### Technical Data:


Order Code	Type of Insulation	Winding Width (mm)	Winding Build (mm)	Winding Perimeter (mm)	$A_c$ (mm <sup>2</sup> )	$L_e$ (mm)	$V_e$ (mm <sup>3</sup> )	Core Order Code (Power)
070-6782	Functional	8.13	2.74	20.17	26.9	30.6	825	150-2874

Order Code	L (mm)	W (mm)	H (mm)
070-6782	15.5 max.	21.69 max.	13.5 max.

### Estimated Maximum Power Level:

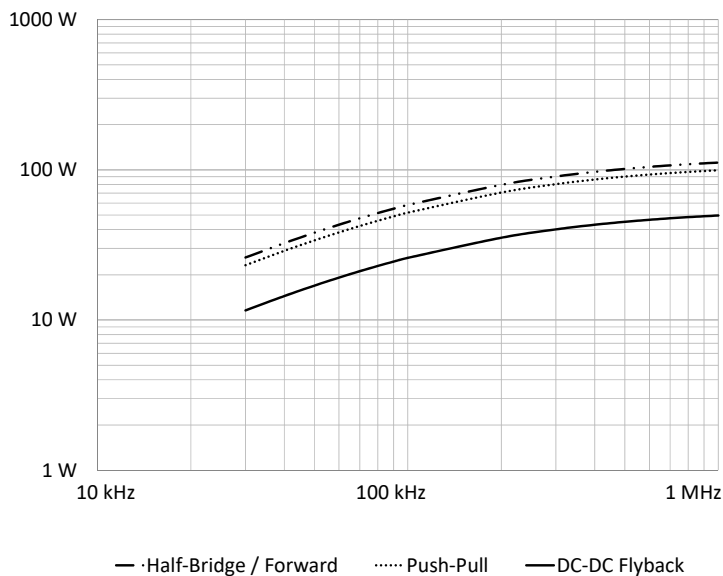

### Dimensions:

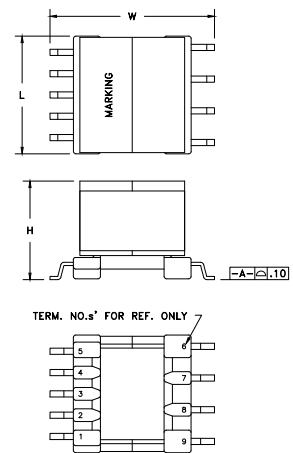

### Footprint (mm):

