


Bobbin Packages

EE16/7/5

10-Terminal EXT, THT, Horizontal

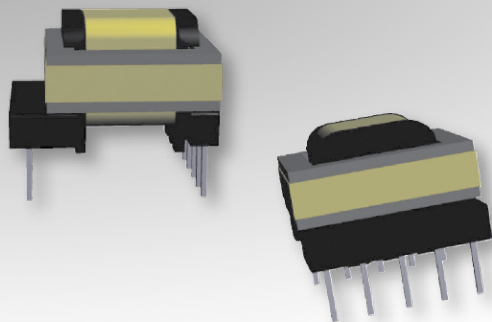

Characteristics:

This TH EE16/7/5 package was developed for special safety cases and low cost requirements.

Applications:


- Offline
- Industrial controls
- Lighting
- Metering
- White goods
- Telecom
- Charging
- Stand-by power

Technical Data:

Order Code	Type of Insulation	Winding Width (mm)	Winding Build (mm)	Winding Perimeter (mm)	A_e (mm ²)	L_e (mm)	V_e (mm ³)	Core Order Code (Power)
070-7101	Reinforced	8	2.54	24	18.4	35.5	653	150-2115

Order Code	L (mm)	W (mm)	H (mm)	G (mm)
070-7101	17.5 max.	20 max.	14 max.	2.54 min.


Estimated Maximum Power Level:

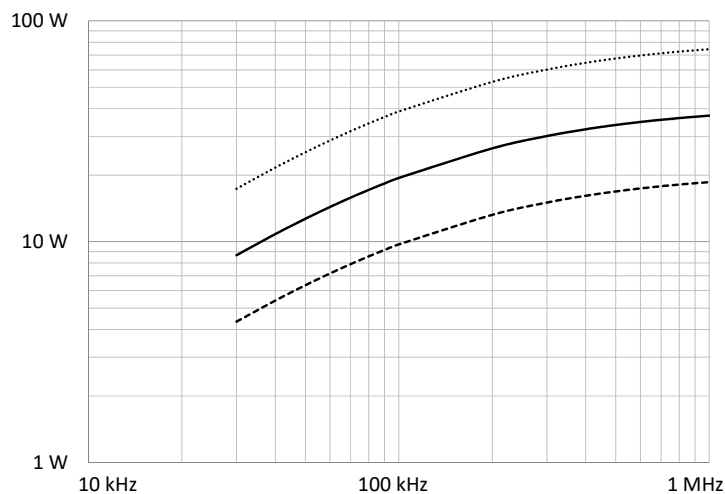

..... Push-Pull — DC-DC Flyback --- Offline Flyback

All curves are DC-DC unless otherwise noted. For offline applications, the power level must be derated as shown in the flyback curves.

Dimensions:

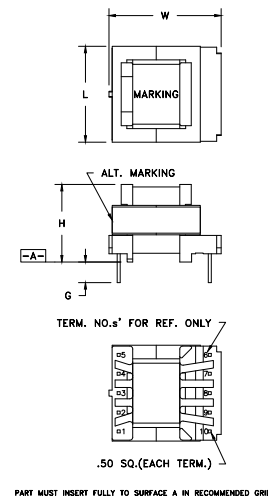

Footprint (mm):

