

# USER GUIDE

## UG015 | Graphite Sheet – WE-TGS



Sebastian Mirasol-Menacho

### 1. INTRODUCTION TO WE-TGS

The **WE-TGS** series is a graphite-based heat spreading material that enhances the distribution of heat across a surface. The spreading helps cool high power density areas, especially when the cooling assembly is significantly larger than the source. The heat spreading sheet is both thin and adhesive, which makes it ideal for sticking onto a flat surface or for bend around soft corners.

Graphite sheets are particularly effective for managing thermal performance in compact electronic devices where space is limited. By spreading heat more evenly, these sheets prevent hotspots that can lead to component failure or reduced efficiency.

This makes them an essential component in the design of high-performance electronics, such as handheld devices, processors or battery assemblies, where maintaining optimal operating temperatures is crucial for performance and longevity.

The WE-TGS series sheets are designed to be lightweight and flexible, allowing for easy integration into various electronic assemblies without adding significant bulk or weight. Their adhesive properties ensure a secure fit, even in applications with complex geometries or where traditional cooling solutions might be impractical. This versatility makes them suitable for a wide range of applications, from consumer electronics to industrial equipment, providing a reliable solution for thermal management challenges.

### 2. MATERIAL SPECIFICATIONS

The graphite pad has three main components, shown in Figure 1:

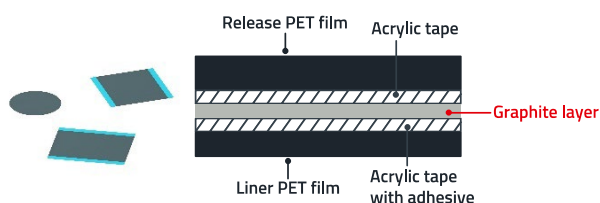


Figure 1: WE-TGS cross-section.

- **PET film:** protects the adhesive and prevents the acrylic films from suffer any scratches.

- **Acrylic tape:** thin film that ensure electrical insulation between the contact surfaces and the graphite layer.
- **Graphite:** synthetic graphite is bonded horizontally at a molecular level, providing very high thermal conductivity in the in-plane axis and nominal thermal conductivity in the through-plane axis.

The properties of the WE-TGS graphite sheet can be grouped into three categories, shown in Table 1, Table 2, and Table 3.

Material properties	
Color	Dark Gray
Thickness	37 μm
Peel Adhesion	750 g/25 mm
Specific Gravity	1.9 g/cm <sup>3</sup>
Operating Temperature	-50 up to 120°C

Table 1: Material properties of WE-TGS.

Thermal Properties	
Thermal Conductivity XY Axis	1800 W/m · K
Thermal Conductivity Z Axis	5 W/m · K

Table 2: Thermal properties of WE-TGS.

Electrical Properties	
Breakdown Voltage	1 kV

Table 3: Electrical properties of WE-TGS.

### 3. DESIGN CONSIDERATIONS

The design-in process of a graphite heat spreader is not as straight-forward as calculating the thermal resistance of a gap filling application; instead we must consider both in-plane and through-plane thermal conduction.

Let's consider a power-dense area in our electronic design where multiple small components are dissipating 5 Watts of heat energy in an area of 4 cm<sup>2</sup>. This area is in contact with a steel housing used to transfer energy to the ambient.

Steel has a relatively low thermal conductivity when compared to other metals such as aluminum or copper. In order to extend the heat over the housing we will evaluate the use of the **WE-TGS** graphite heat spreader in the following use-case scenario (Table 4).

Parameter	Symbol	Value
Ambient Temperature	$T_A$	25°C
Heat Source		5 W
Heat Source Area	$A_S$	4 cm <sup>2</sup>
Steel	Area	$A_{STEEL}$
	Thickness	$d_{STEEL}$
	Thermal Conductivity	$\lambda_{STEEL}$
Graphite	Area	$A_{SPREAD}$
	Thickness	$d_{SPREAD}$
	Thermal Conductivity	$\lambda_{SPREAD}$

Table 4: Parameters to evaluate the WE-TGS graphite heat spreader.

To analyze how a graphite heat spreader on a steel housing can improve heat transfer from a heat source to the ambient, we will break down the problem into two main parts: the heat conduction ( $Q_{COND}$ ) through the graphite heat spreader and the heat dissipation to the ambient through natural convection ( $Q_{CONV}$ ).

### Heat Conduction

Fourier's law for heat conduction is given by:

$$Q_{COND} = -\lambda \cdot A \cdot \frac{dT}{dx} \quad (1)$$

We can rewrite it as:

$$Q_{COND} = \lambda \cdot A \cdot \frac{T_1 - T_2}{d} \quad (2)$$

And rearrange it to find the temperature difference across a surface:

$$T_1 - T_2 = \frac{Q_{COND} \cdot d}{\lambda \cdot A} \quad (3)$$

To calculate the temperature drop across the steel housing:

$$T_{STEEL1} - T_{STEEL2} = \frac{5 \text{ W} \cdot 2 \cdot 10^{-3} \text{ m}}{50 \frac{\text{W}}{\text{m} \cdot \text{K}} \cdot 0.25 \text{ m}^2} = 0.8 \cdot 10^{-3} \text{ K} \quad (4)$$

And that of the graphite:

$$T_{SPREAD1} - T_{SPREAD2} = \frac{5 \text{ W} \cdot 37 \cdot 10^{-6} \text{ m}}{1800 \frac{\text{W}}{\text{m} \cdot \text{K}} \cdot 0.25 \text{ m}^2} \quad (5)$$

$$T_{SPREAD1} - T_{SPREAD2} = 0.4 \cdot 10^{-6} \text{ K}$$

As expected, the temperature drop across the surface of the graphite is significantly lower than the steel, since it has a higher thermal conductivity value. We can assume the total temperature drop of the graphite applied on the steel housing as:

$$T_{DROP} = 0.98 \cdot 10^{-3} \text{ K} \quad (6)$$

### Heat Dissipation

The heat dissipated by natural convection over the surface of the steel housing of our electronic design is defined as:

$$Q_{CONV} = h \cdot A \cdot (T_1 - T_2) \quad (7)$$

Since we are considering a natural convection environment, we can assume a heat transfer coefficient value of  $h = 10 \text{ W/m}^2 \cdot \text{K}$ .

$$Q_{CONV} = 10 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \cdot 0.25 \text{ m}^2 \cdot (T_{SOURCE} - T_A) \quad (8)$$

$$Q_{CONV} = 2.5 \cdot (T_{SOURCE} - T_A) \text{ W}$$

Heat transfer is defined by the temperature difference between the source and the ambient. The larger the difference the more energy will flow.

If we assume  $T_{SOURCE} = 75^\circ\text{C}$ :

$$Q_{CONV} = 2.5 \cdot (75^\circ\text{C} - 25^\circ\text{C}) \text{ W} = 125 \text{ W} \quad (9)$$

With the graphite applied to the steel housing, we are able to transfer up to 125 W to the ambient through natural convection (more than the 5 W generated in our use-case). These calculations estimate the effect of the graphite heat spreader on a steel housing. For a more detailed analysis that also considers other environmental parameters, it is encouraged to perform FEM simulations of your design.

### 4. THERMAL PERFORMANCE

Synthetic graphite is manufactured such that carbon molecules are bonded in thin layers, giving the material excellent thermal conductivity in the in-plane axis.

Compared to other commonly used heat spreading materials such as aluminum and copper, the WE-TGS provides superior heat spreading capabilities, as shown in Figure 2 and Figure 3 while being significantly lighter.

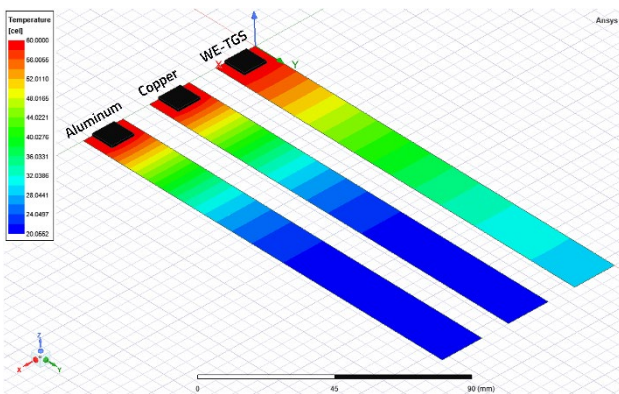


Figure 2: 18 x 18 mm strips with 5 W heat source.

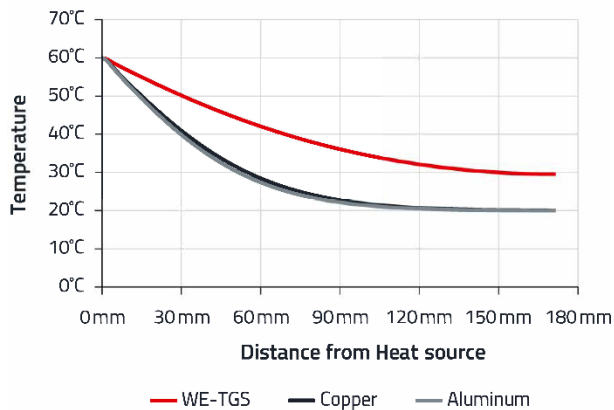


Figure 3: Thermal performance process.

The WE-TGS shows a smaller temperature difference over its surface. In an application-like environment, any surface with heat more evenly distributed across it will be able to transfer more heat energy to the ambient.

### 5. INSTALLATION AND HANDLING

To avoid air bubbles trapped between the contact surfaces and the adhesive pad when applying flexible material, place the edge of the pad on the surface and remove the protective liner as a 1 kg roller is rolled over the opposite surface.

To ensure correct application, the following steps are recommended:

- The surface of the component and cooling assemblies must be clean and dry. It is recommended to use isopropyl alcohol applied with a lint-free wipe or swab to remove any particles on contact surfaces.
- Remove the protective liner from one of the pad's surfaces.
- Place the adhesive with a rolling motion to avoid air bubbles. If possible, apply pressure with a 1 kg roller to activate the adhesive.
- When the other part is ready for assembly, remove the protective liner.
- Apply the component or assembly with a rolling motion and pressure.

#### Cutting

The WE-TGS graphite sheets can be cut to shape using any cutting tool. This approach is intended for prototyping and evaluation purposes only.

For series production, cutting standard parts is not recommended, as it may lead to layer delamination and reduced mechanical integrity. To ensure proper sealing and long-term reliability, it is recommended to order a custom-modified part using the modification services offered by Würth Elektronik.

#### Reworking

The WE-TGS is not a reworkable pad. If separation of the stack is difficult, apply heat and torque or peel to separate the substrates. This will result in the destruction of the pad.

If there is any leftover material, carefully pry it with plastic or wooden tool to avoid damaging the contact surfaces. It is recommended to clean the surface areas with isopropyl alcohol on a lint-free wipe.

### IMPORTANT NOTICE

The Application Note is based on our knowledge and experience of typical requirements concerning these areas. It serves as general guidance and should not be construed as a commitment for the suitability for customer applications by Würth Elektronik eiSos GmbH & Co. KG. The information in the Application Note is subject to change without notice. This document and parts thereof must not be reproduced or copied without written permission, and contents thereof must not be imparted to a third party nor be used for any unauthorized purpose.

Würth Elektronik eiSos GmbH & Co. KG and its subsidiaries and affiliates (WE) are not liable for application assistance of any kind. Customers may use WE's assistance and product recommendations for their applications and design. The responsibility for the applicability and use of WE Products in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate and investigate, where appropriate, and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

The technical specifications are stated in the current data sheet of the products. Therefore the customers shall use the data sheets and are cautioned to verify that data sheets are current. The current data sheets can be downloaded at [www.we-online.com](http://www.we-online.com). Customers shall strictly observe any product-specific notes, cautions and warnings. WE reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services.

WE DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE,

EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH WE PRODUCTS OR SERVICES ARE USED. INFORMATION PUBLISHED BY WE REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WE TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

WE products are not authorized for use in safety-critical applications, or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, WE products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Customers shall inform WE about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or health, customers must ensure that they have all necessary expertise in the safety and regulatory ramifications of their applications. Customers acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of WE products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by WE.

CUSTOMERS SHALL INDEMNIFY WE AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WE PRODUCTS IN SUCH SAFETY-CRITICAL APPLICATION.

### USEFUL LINKS



Application Notes

[www.we-online.com/appnotes](http://www.we-online.com/appnotes)



**REDEXPERT** Design Platform

[www.we-online.com/redexpert](http://www.we-online.com/redexpert)



Toolbox

[www.we-online.com/toolbox](http://www.we-online.com/toolbox)



Product Catalog

[www.we-online.com/products](http://www.we-online.com/products)

### CONTACT INFORMATION



[appnotes@we-online.com](mailto:appnotes@we-online.com)

Tel. +49 7942 945 - 0



Würth Elektronik eiSos GmbH & Co. KG

Max-Eyth-Str. 1 74638 Waldenburg Germany

[www.we-online.com](http://www.we-online.com)

### REVISION HISTORY

Document Version	Release Date	Changes
UG015a	2025/03/10	Initial release of the application note
UG015b	2026/06/16	Changed thickness in table 4, equation 4, 5 and 6, Cutting on page 3, chapter 6 deleted

**Note:** The current version of the document and the release date are indicated in the footer of each page of this document.