


Bobbin Packages

EE13/7/4 (EF12.6)

9-Terminal EXT, SMT, Horizontal

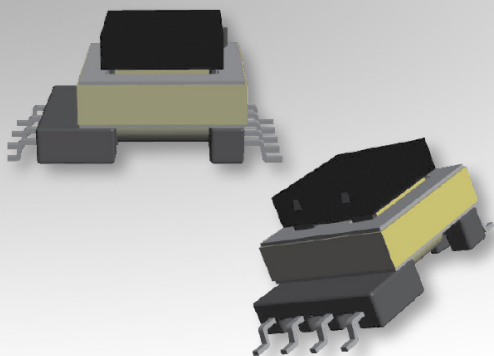

Characteristics:

This SMT EE13/7/4 (EF12.6) package was developed for special safety cases and low cost requirements.

Applications:


- Offline
- Industrial controls
- Lighting
- Metering
- White goods
- Telecom
- Charging
- Stand-by power

Technical Data:

Order Code	Type of Insulation	Winding Width (mm)	Winding Build (mm)	Winding Perimeter (mm)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	Core Order Code (Power)
070-7133	Reinforced	7.49	1.8	20.4	12.4	29.6	367	150-2300

Order Code	L (mm)	W (mm)	H (mm)
070-7133	13.8 max.	23.9 max.	11 max.


Estimated Maximum Power Level:

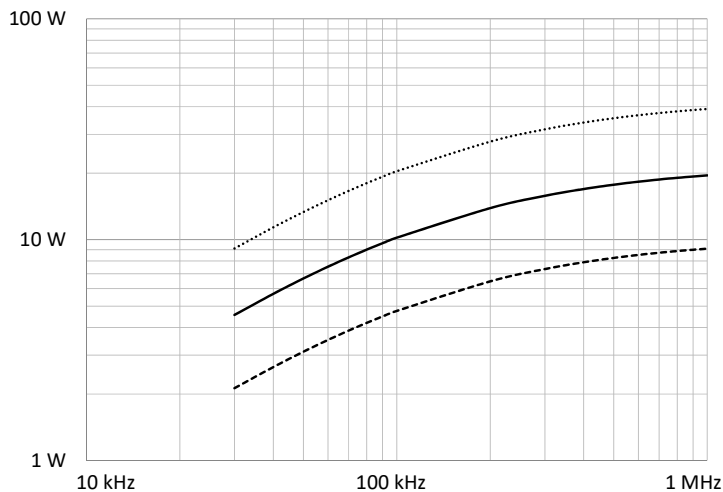

..... Push-Pull — DC-DC Flyback --- Offline Flyback

All curves are DC-DC unless otherwise noted. For offline applications, the power level must be derated as shown in the flyback curves.

Dimensions:

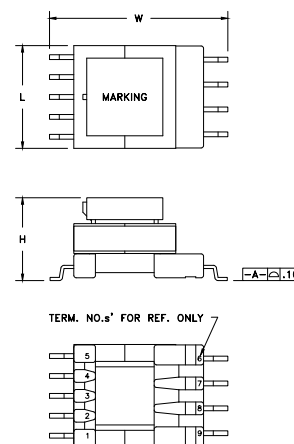

Footprint (mm):

