


WR-BTB Board-to-Board 0.8 mm

0.8 mm pitch Variable Mating Height Board-to-Board Connectors

Overview



Characteristics

- Board-to-board distance: 5 mm to 16 mm
- Dual row
- Polarities: 40 to 100 pins
- Compatible with PCIe 2.0 and equivalent standards

Applications

- Industrial Electronics
- Networks and Telecommunications
- E-Mobility
- Smart Power/ Smart Grid Solutions

General Information

Kind Properties:

Properties		Value	Unit
Pitch	P	0.8	mm
Gender		Male Plug	
Type		Vertical	

Material Properties:

Insulator Material	LCP
Insulator Flammability Rating	UL94 V-0
Insulator Color	Ivory
Contact Material	Copper Alloy
Contact Plating	Selective Gold
Contact Type	Stamped

General Information:

Operating Temperature	-55 °C up to +85 °C
-----------------------	---------------------

Electrical Properties:

Properties		Test conditions	Value	Unit	Tol.
Rated Current	I_R		0.5	A	
Working Voltage			50	V (AC)	
Withstanding Voltage		1 min	500	V (AC)	
Contact Resistance	R		50	mΩ	max.
Insulation Resistance	R_{ISO}		100	MΩ	min.

Certification:

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [IEC 61249-2-21]
Halogen Free	Conform [JEDEC JS709B]
UL Approval	E323964

ORDER
SAMPLES

SIMULATE IN
REDEXPERT



Specific Information

Signal Integrity

More detailed information to signal Integrity on WR-BTB series is available with the Application Note ANE025:

we-online.com/ANE025

Single-ended Signaling

The impedance in GSG configuration is 50 ± 10 Ohm (50 Ohm simulated). The Würth Elektronik 0.8 mm Board-to-Board connectors series can be assembled with different mated heights. The lowest mated height possible is 5mm, the highest is 20 mm. When tested with a 50 Ohm transmission line in a GSG test fixture, the experimental Insertion Loss profile can be modeled with a safety margin using the following equation:

$$IL(f) = (A_{5mm} + nA_{mm})f^2 + (B_{5mm} + nB_{mm})f + (C_{5mm} + nC_{mm})$$

The equation states that the insertion loss (IL) of the interconnect, when measured in a 50 Ohm GSG test fixture, can be approximated by a second-order polynomial function of frequency f . This model includes a safety margin, meaning it intentionally overestimates the loss slightly to stay on the safe side when predicting performance.

Example: for a mated height of 14 mm, n will be 9, so the model will be:

$$IL(f) = (A_{5mm} + 9A_{mm})f^2 + (B_{5mm} + 9B_{mm})f + (C_{5mm} + 9C_{mm})$$

Using the following parameters with f in GHz with the WR-BTB 0.8 mm High-Speed Low-Profile series shows following results:

GSG Insertion loss parameters for 5 mm mated height:

- $A_{5mm} = -1.45 \cdot 10^{-2}$
- $B_{5mm} = -4.87 \cdot 10^{-1}$
- $C_{5mm} = -6.8 \cdot 10^{-1}$

GSG Insertion loss parameters for each additional 1 mm mated height:

- $A_{mm} = -7.51 \cdot 10^{-4}$
- $B_{mm} = -9.46 \cdot 10^{-3}$
- $C_{mm} = 0$

The parameters with the formula mentioned above result in the following diagram:

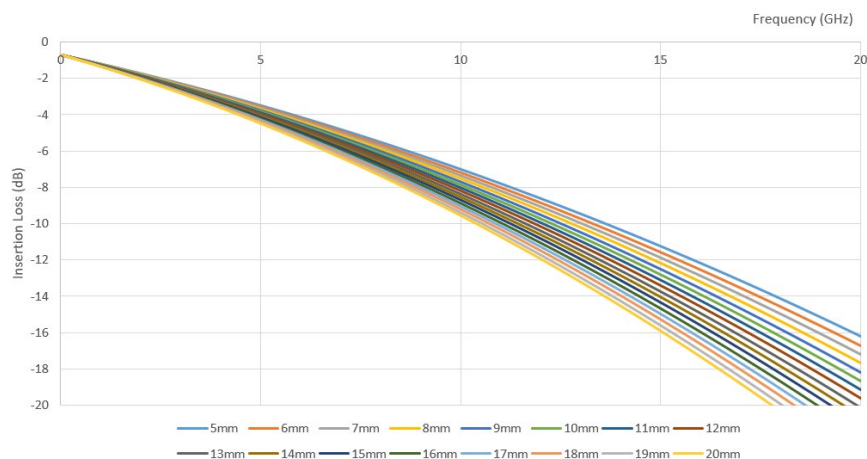


Figure 1: WR-BTB 0.8 mm GSG 50 Ohm Insertion loss profile

The safety margin of this loss profile is about 3 dB at 10 GHz and 1 dB at 5GHz.

ORDER
SAMPLES

SIMULATE IN
REDEXPERT



Specific Information

Differential Signaling

The differential impedance in GSSG configuration of this connector is $100 \pm 10 \text{ Ohm}$ (100 Ohm simulated). When tested with a 100 Ohm reference differential transmission line in a GSSG test fixture, the experimental Insertion Loss profile (in dB) can be modeled with a safety margin using the following equation:

$$IL(f) = (A_{5mm} + nA_{mm})f^2 + (B_{5mm} + nB_{mm})f + (C_{5mm} + nC_{mm})$$

GSSG Insertion loss parameters for 5 mm mated height:

- $A_{5mm} = -1.08 \cdot 10^{-2}$
- $B_{5mm} = -6.55 \cdot 10^{-2}$
- $C_{5mm} = -3.10 \cdot 10^{-1}$

GSSG Insertion loss parameters for each additional 1 mm mated height:

- $A_{mm} = -8.50 \cdot 10^{-4}$
- $B_{mm} = -9.82 \cdot 10^{-3}$
- $C_{mm} = 0$

The parameters with the formula mentioned above result in the following diagram:

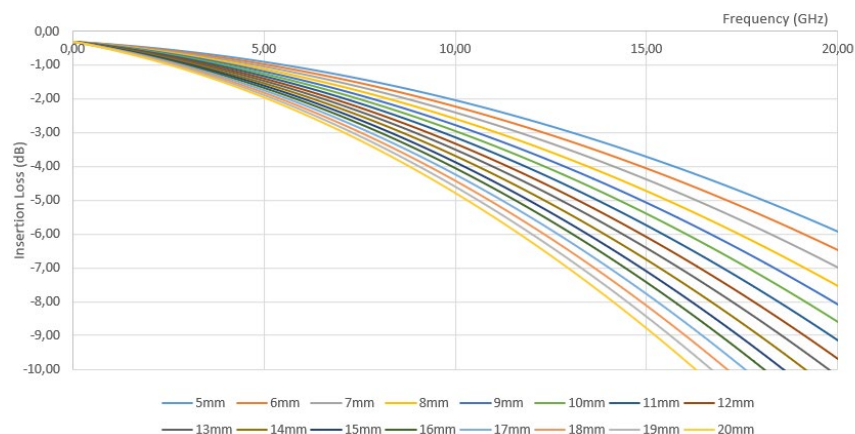


Figure 2: WR-BTB 0.8 mm GSSG 100 Ohm differential Insertion loss profile

The safety margin of this loss profile is about 0.5 dB at 10 GHz.

ORDER
SAMPLES

SIMULATE IN
REDEXPERT

