

**9V - 36V Input / 6W / 1.5kV Functionally Isolated / Regulated 5V Output**

**DESCRIPTION**

The FIRM 1750105311 MagI<sup>3</sup>C power module is a regulated, functionally isolated, fully integrated DC/DC converter.

The module integrates the switching power stage, control circuitry, transformer, input/output filters and capacitors.

The FIRM module ensures fast time to market and low development costs.

The 1750105311 module achieves an efficiency up to 82%.

The module is available in a DIP-24 package (32.0 x 20.0 x 10.8mm).


This module has integrated protection circuitry against electrical damage that protects against overcurrent, short circuit, input undervoltage, and output overvoltage.

**FEATURES**


- 1.5kV DC functional isolation for 60s
- Input voltage range: 9V to 36V
- Output voltage: regulated 5V
- Low output voltage ripple: Typ. 7mVpp at full load
- Output voltage accuracy: Typ. 1% at full load
- Output power: 6W (1.2A)
- 50V input transient capability of up to 1s
- Continuous short-circuit protection
- Isolation capacitance of typ. 1000pF
- Integrated  $C_{IN}$ ,  $C_{OUT}$  and transformer
- Included internal input filter, output filter, and Y-capacitor
- Operating ambient temperature range: -40°C to 85°C
- No thermal derating over operating ambient temperature range
- RoHS & REACH compliant
- Complies with EN55032 (CISPR-32) Class A conducted and radiated emissions without additional external filter
- Complies with EN55032 (CISPR-32) Class B conducted and radiated emissions standard with additional external filter
- Metal housing
- UL62368-1 pending

**TYPICAL APPLICATIONS**

- Data acquisition
- Test and measurement systems
- Interface and microcontroller supplies
- Industrial control



**TYPICAL CIRCUIT DIAGRAM**

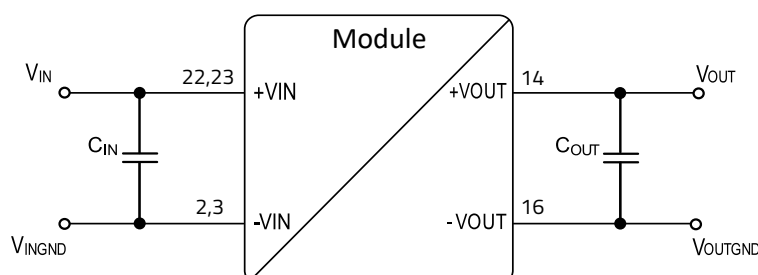

## CONTENTS

|           |                                                                        |           |
|-----------|------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b>PINOUT</b>                                                          | <b>4</b>  |
| <b>2</b>  | <b>ORDERING INFORMATION</b>                                            | <b>5</b>  |
| <b>3</b>  | <b>SALES INFORMATION</b>                                               | <b>5</b>  |
| <b>4</b>  | <b>ABSOLUTE MAXIMUM RATINGS</b>                                        | <b>6</b>  |
| <b>5</b>  | <b>OPERATING CONDITIONS</b>                                            | <b>6</b>  |
| <b>6</b>  | <b>THERMAL SPECIFICATION</b>                                           | <b>6</b>  |
| <b>7</b>  | <b>ELECTRICAL SPECIFICATIONS</b>                                       | <b>7</b>  |
| <b>8</b>  | <b>RoHS, REACH</b>                                                     | <b>8</b>  |
| <b>9</b>  | <b>PACKAGE SPECIFICATIONS</b>                                          | <b>8</b>  |
| <b>10</b> | <b>RELIABILITY</b>                                                     | <b>8</b>  |
| <b>11</b> | <b>NOTES</b>                                                           | <b>9</b>  |
| <b>12</b> | <b>ISOLATION VOLTAGE</b>                                               | <b>10</b> |
| 12.1      | Dielectric Test Setup (High Pot Test)                                  | 10        |
| 12.2      | Repeated High-Voltage Isolation Testing                                | 10        |
| <b>13</b> | <b>TYPICAL PERFORMANCE CURVES</b>                                      | <b>11</b> |
| 13.1      | Radiated and Conducted Emissions EN55032 (CISPR-32) Class B Compliance | 11        |
| 13.1.1    | Radiated Emissions EN55032 (CISPR-32) Class B Compliant Test Setup     | 11        |
| 13.1.2    | Conducted Emissions EN55032 (CISPR-32) Class B Compliant Test Setup    | 11        |
| 13.1.3    | Radiated And Conducted Emissions                                       | 12        |
| 13.2      | DC Performance Curves                                                  | 14        |
| 13.2.1    | Efficiency                                                             | 14        |
| 13.2.2    | Temperature Derating                                                   | 14        |
| 13.2.3    | Load Regulation 5Vout                                                  | 15        |
| 13.2.4    | Line Regulation 5Vout                                                  | 15        |
| <b>14</b> | <b>BLOCK DIAGRAM</b>                                                   | <b>16</b> |
| <b>15</b> | <b>CIRCUIT DESCRIPTION</b>                                             | <b>16</b> |
| <b>16</b> | <b>MODE OF OPERATION</b>                                               | <b>17</b> |
| 16.1      | PWM Operation                                                          | 17        |
| <b>17</b> | <b>OUTPUT VOLTAGE RIPPLE</b>                                           | <b>18</b> |
| <b>18</b> | <b>PROTECTION FEATURES</b>                                             | <b>19</b> |
| 18.1      | Over Current Protection (OCP)                                          | 19        |
| 18.2      | Short Circuit Protection (SCP)                                         | 19        |
| 18.3      | Integrated UVLO                                                        | 19        |
| 18.4      | Output Over Voltage Protection (OVP)                                   | 19        |
| 18.5      | Soft-Start                                                             | 20        |
| <b>19</b> | <b>DESIGN EXAMPLE - EN55032</b>                                        | <b>21</b> |
| 19.1      | Layout                                                                 | 21        |
| 19.2      | Schematic                                                              | 22        |
| 19.3      | Bill of Materials                                                      | 22        |

|                                                |           |
|------------------------------------------------|-----------|
| <b>20 DESIGN EXAMPLE - FULL EMC COMPLIANCE</b> | <b>23</b> |
| 20.1 Layout Full EMC Compliance                | 23        |
| 20.2 Schematic Full EMC Compliance             | 24        |
| 20.3 Bill of Materials Full EMC Compliance     | 24        |
| <b>21 APPLICATION CONSIDERATIONS</b>           | <b>25</b> |
| 21.1 Primary Side Parallel Connection          | 25        |
| 21.2 Secondary Side Serial Connection          | 26        |
| 21.3 Generating Complementary Output Voltages  | 27        |
| 21.4 Reverse Polarity Protection               | 28        |
| <b>22 HANDLING RECOMMENDATIONS</b>             | <b>29</b> |
| 22.1 Solder Profile                            | 29        |
| <b>23 PHYSICAL DIMENSIONS</b>                  | <b>30</b> |
| 23.1 Component                                 | 30        |
| 23.2 Recommended Drill Holes                   | 31        |
| 23.3 Packaging                                 | 32        |
| 23.3.1 Tube                                    | 32        |
| 23.3.2 Carton                                  | 32        |
| <b>24 DOCUMENT HISTORY</b>                     | <b>34</b> |
| <b>25 LIST OF FIGURES</b>                      | <b>35</b> |
| <b>26 LIST OF TABLES</b>                       | <b>36</b> |
| <b>27 CAUTIONS AND WARNINGS</b>                | <b>37</b> |
| <b>28 IMPORTANT NOTES</b>                      | <b>38</b> |

1 PINOUT



Figure 1: Pinout.

Table 1: Marking description.

| MARKING           | DESCRIPTION                                                   |
|-------------------|---------------------------------------------------------------|
| WE                | Würth Elektronik eiSos GmbH & Co. KG                          |
| YY                | Year                                                          |
| WW                | Calendar week                                                 |
| 1750105311        | Order code                                                    |
| 9-36V/5V 6W 1.5kV | Input voltage/output voltage, output power, isolation voltage |

Table 2: Pin description.

| SYMBOL | NUMBER | TYPE  | DESCRIPTION        |
|--------|--------|-------|--------------------|
| -VIN   | 2,3    | Power | Input ground pin   |
| +VIN   | 22,23  | Power | Input voltage pin  |
| -VOUT  | 16     | Power | Output ground pin  |
| +VOUT  | 14     | Power | Output voltage pin |
| NC     | 11     | —     | Not connected      |

## 2 ORDERING INFORMATION

Table 3: Ordering information.

| ORDER CODE | SPECIFICATIONS              | PACKAGE | PACKAGING UNIT   |
|------------|-----------------------------|---------|------------------|
| 1750105311 | 9V - 36V Vin / 5V Vout / 6W | DIP-24  | Tube (15 pieces) |

## 3 SALES INFORMATION

Table 4: Sales information.

| SALES CONTACT                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Würth Elektronik eiSos GmbH & Co. KG<br>EMC and Inductive Solutions<br>Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 7942 945 0<br><a href="http://www.we-online.com/powermodules">www.we-online.com/powermodules</a><br>Technical support: <a href="mailto:wpme-support@we-online.com">wpme-support@we-online.com</a> |

#### 4 ABSOLUTE MAXIMUM RATINGS

**Caution:**

Exceeding the listed absolute maximum ratings may affect the device negatively and may cause permanent damage.

Table 5: Absolute maximum ratings.

| SYMBOL               | PARAMETER                                                | LIMIT              |                    | UNIT |
|----------------------|----------------------------------------------------------|--------------------|--------------------|------|
|                      |                                                          | MIN <sup>(1)</sup> | MAX <sup>(1)</sup> |      |
| V <sub>IN</sub>      | Input pin voltage                                        | -0.6               | 40                 | V    |
| V <sub>OUT</sub>     | Output pin voltage                                       | -0.4               | 16                 | V    |
| V <sub>ISO</sub>     | Isolation voltage input to output for 60s <sup>(6)</sup> | —                  | 1.5                | kV   |
| T <sub>storage</sub> | Assembled, non-operating storage temperature             | -40                | 125                | °C   |
| V <sub>ESD</sub>     | ESD Voltage (HBM) <sup>(4)</sup>                         | -4                 | 4                  | kV   |

#### 5 OPERATING CONDITIONS

Operating conditions are conditions under which the device is intended to be functional. All values are referenced to GND.

MIN and MAX limits are valid for the recommended ambient temperature range of -40°C to 85°C.

Table 6: Operating conditions.

| SYMBOL               | PARAMETER                               | MIN <sup>(1)</sup> | TYP <sup>(3)</sup> | MAX <sup>(1)</sup> | UNIT |
|----------------------|-----------------------------------------|--------------------|--------------------|--------------------|------|
| V <sub>IN</sub>      | Input voltage                           | 9                  | —                  | 36                 | V    |
| V <sub>OUT</sub>     | Output voltage                          | —                  | 5                  | —                  | V    |
| I <sub>OUT</sub>     | Nominal output current <sup>(5)</sup>   | —                  | —                  | 1.2                | A    |
| P <sub>OUT</sub>     | Nominal output power (without derating) | —                  | —                  | 6                  | W    |
| C <sub>OUT_MAX</sub> | Maximal output capacitance              | —                  | —                  | 1000               | µF   |
| T <sub>a</sub>       | Ambient temperature range               | -40                | —                  | 85 <sup>(2)</sup>  | °C   |
| T <sub>JOP</sub>     | Junction temperature range              | -40                | —                  | 125                | °C   |

#### 6 THERMAL SPECIFICATION

**Caution:**

Exceeding the listed absolute maximum rating may affect the device negatively and may cause permanent damage.

Table 7: Thermal specification.

| SYMBOL                | PARAMETER                           | TYP <sup>(3)</sup> | UNIT |
|-----------------------|-------------------------------------|--------------------|------|
| T <sub>Case_Max</sub> | Maximum case temperature (top side) | 85                 | °C   |

## 7 ELECTRICAL SPECIFICATIONS

### Caution:

MIN and MAX limits are valid for the recommended ambient temperature range of -40°C to 85°C. Typical values represent statistically the utmost probable values at the following conditions:  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 8: Electrical specifications.

| SYMBOL                           | PARAMETER                           | TEST CONDITIONS                                                 | MIN <sup>(1)</sup> | TYP <sup>(3)</sup> | MAX <sup>(1)</sup> | UNIT             |
|----------------------------------|-------------------------------------|-----------------------------------------------------------------|--------------------|--------------------|--------------------|------------------|
| <b>Input voltage</b>             |                                     |                                                                 |                    |                    |                    |                  |
| $V_{TC}$                         | Input transient capability          | 1s max.                                                         | -0.7               | —                  | 50                 | V                |
| $V_{UVLO}$                       | Input undervoltage lockout          | —                                                               | 5.5                | 6.5                | —                  | V                |
| <b>Output Current</b>            |                                     |                                                                 |                    |                    |                    |                  |
| $I_{OC}$                         | Overcurrent limit                   | —                                                               | 1.3                | 1.7                | 2.3 <sup>(7)</sup> | A                |
| <b>Output voltage</b>            |                                     |                                                                 |                    |                    |                    |                  |
| $V_{OUT}$                        | Line regulation                     | per 1.0% change in input voltage <sup>(8)</sup>                 | —                  | $\pm 0.2$          | —                  | %                |
|                                  | Load Regulation                     | $V_{IN}$ nominal, $V_{OUT} = 5V$<br>$I_{OUT} = 0.06A$ to $1.2A$ | —                  | $\pm 0.5$          | $\pm 1.5$          | %                |
|                                  | Output voltage accuracy             | $V_{IN}$ nominal, $I_{OUT} = 1.2A$                              | —                  | $\pm 1$            | —                  | %                |
|                                  | Output voltage ripple & noise       | $V_{IN}$ nominal, $V_{OUT} = 5V$<br>20MHz BWL                   | —                  | 7                  | —                  | mV <sub>pp</sub> |
|                                  | Output overvoltage protection       | —                                                               | 5.5                | —                  | 8                  | V                |
| <b>Switching Frequency</b>       |                                     |                                                                 |                    |                    |                    |                  |
| $f_{SW}$                         | Switching frequency, internal clock | $V_{IN}$ nominal, $I_{OUT} = 1.2A$                              | —                  | 300                | —                  | kHz              |
| <b>Input Current</b>             |                                     |                                                                 |                    |                    |                    |                  |
| $I_{IN}$                         | No load input current               | $V_{IN} = 24V$ , $I_{OUT} = 0A$                                 | —                  | 5                  | —                  | mA               |
| <b>Efficiency</b>                |                                     |                                                                 |                    |                    |                    |                  |
| $\eta$                           | Efficiency                          | $V_{IN} = 24V$ , $I_{OUT} = 1.2A$                               | —                  | 82                 | —                  | %                |
| <b>Isolation Characteristics</b> |                                     |                                                                 |                    |                    |                    |                  |
| $C_{ISO}$                        | Isolation capacitance               | 100kHz/0.1V                                                     | —                  | 1000               | —                  | pF               |
| $R_{ISO}$                        | Isolation resistance                | 500VDC                                                          | 1                  | —                  | —                  | GΩ               |

Table 9: Electromagnetic Compatibility (EMC).

|                        |                                                                 |                                                                                    |                                 |                  |  |
|------------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------|------------------|--|
| <b>Emissions (EMI)</b> | CE                                                              | CISPR32/EN55032 CLASS A (without external LC-filter)/ CLASS B (see Design EXAMPLE) |                                 |                  |  |
|                        | RE                                                              | CISPR32/EN55032 CLASS A (without external LC-filter)/ CLASS B (see Design EXAMPLE) |                                 |                  |  |
| <b>Immunity (EMS)</b>  | ESD                                                             | IEC/EN61000-4-2                                                                    | Contact $\pm 4kV$               | perf. Criteria B |  |
|                        | RS                                                              | IEC/EN61000-4-3                                                                    | 10V/m                           | perf. Criteria A |  |
|                        | EFT                                                             | IEC/EN61000-4-4                                                                    | $\pm 2kV$ (see Design Example)  | perf. Criteria B |  |
|                        | Surge                                                           | IEC/EN61000-4-5                                                                    | $\pm 500V$ (see Design Example) | perf. Criteria B |  |
|                        | CS                                                              | IEC/EN61000-4-6                                                                    | 3 Vr.m.s                        | perf. Criteria A |  |
|                        | Voltage dips, short interruption and voltage variation immunity | IEC/EN61000-4-29                                                                   | 0-70%                           | perf. Criteria A |  |

## 8 RoHS, REACH

Table 10: RoHS, REACH.

|                 |                                                                                   |                                                                                                                                                                                         |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RoHS directive  |  | Directive 2011/65/EU of the European Parliament and the Council of June 8th, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. |
| REACH directive |                                                                                   | Directive 1907/2006/EU of the European Parliament and the Council of June 1st, 2007 regarding the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH).         |

## 9 PACKAGE SPECIFICATIONS

Table 11: Package specifications.

| ITEM        | PARAMETER                                                                                          | TYP <sup>(3)</sup> | UNIT |
|-------------|----------------------------------------------------------------------------------------------------|--------------------|------|
| Case        | UL94 V-0 Refer to UL approval E157036                                                              | —                  | —    |
| $\phi$ (RH) | Maximum storage humidity (see <a href="#">HANDLING RECOMMENDATIONS</a> for soldering requirements) | 95                 | %    |
| Weight      |                                                                                                    | 12                 | g    |
| Vibration   | IEC/EN 61373 Category 1B (Carbody-mounted)                                                         | —                  | —    |
| IP          | According to IEC/EN 60529                                                                          | IP40               | —    |
| Washing     | It is recommended to wipe the surface only to prevent liquid from entering the enclosure.          |                    |      |

## 10 RELIABILITY

Table 12: Reliability.

| SYMBOL              | PARAMETER                  | TEST CONDITIONS       | TYP <sup>(3)</sup>     | UNIT |
|---------------------|----------------------------|-----------------------|------------------------|------|
| MTBF <sup>(8)</sup> | Mean Time Between Failures | +25 °C: Ground Benign | 6206 · 10 <sup>3</sup> | h    |
|                     |                            | +85 °C: Ground Benign | 1517 · 10 <sup>3</sup> | h    |

## 11 NOTES

- (1)** Min and Max limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlation using Statistical Quality Control (SQC) methods.
- (2)** Measured without heatsink. Natural convection (0 - 20LFM / 0 - 0.1m/s) Test PCB 80mm x 80mm horizontal orientation 35µm copper on top and bottom.
- (3)** Typical numbers are valid at 25°C ambient temperature and represent statistically the utmost probability assuming the Gaussian distribution.
- (4)** The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin. Test method is per JESD-22-114.
- (5)** Depending on ambient temperature, see thermal derating diagram ([Thermal Derating](#)).
- (6)** Not production tested. It is a design parameter. Test voltage as defined by the UL62368-1. EOL test is done with elevated voltage level of 1.65kV for 3s.
- (7)** Within the complete  $V_{IN}$  operating range.
- (8)** MIL-HDBK-217F; GB Ground, Benign: Non mobile, temperature and humidity controlled environments readily accessible to maintenance; includes laboratory instruments and test equipment, medical electronic equipment, business and scientific computer complexes, and missiles and support equipment in ground silos; MTBF value is referring to 1750105311.

## 12 ISOLATION VOLTAGE

To verify the integrity of the isolation a test voltage is applied for a specified time across a component that is designed to provide electrical isolation. This test is known as 'High Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' or 'Isolation Test Voltage'.

All isolated Power Modules are 100% production tested at their stated isolation voltage. This is 1.65 kVDC for 3 seconds.

The isolation test voltage indicated in this datasheet is for voltage transient immunity only. It does not allow this part to be used within a safety isolation system.

The module will function properly with several hundreds of volts applied continuously across the isolation barrier, however surrounding components must be individually analyzed to ensure proper insulation. Isolation measures must be taken into account to prevent any user-accessible circuitry from causing harm.

### 12.1 Dielectric Test Setup (High Pot Test)

Connect all input and output terminals together (see figure below) before connecting the supply voltage. When testing, set the cut-off current to 1mA with a test voltage of 1.65kVDC and test time of 3s.

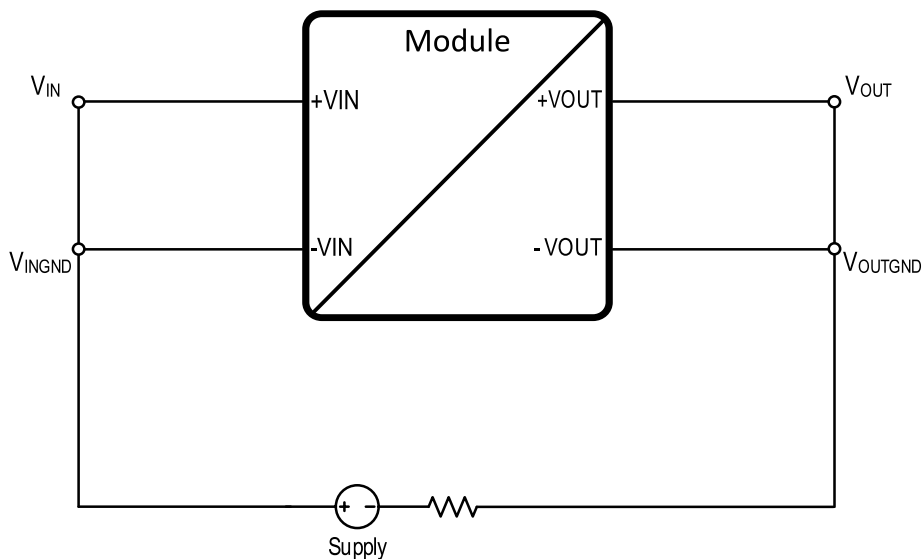


Figure 2: Dielectric test setup.

### 12.2 Repeated High-Voltage Isolation Testing

A repeated high voltage test of a barrier component degrades its isolation capabilities.

The primary and secondary windings within this transformer are enameled (coated) but do not possess additional isolation. Typically, parts can withstand multiples of their stated test voltage and still perform optimally. The magnet wire coating can degrade over time due to chemical reactions that occur at high voltages. We recommend keeping high voltage isolation testing to a minimum to better protect the isolation between the windings. If repeated high voltage isolation testing is required, consider reducing the voltage by a significant amount e.g. 20% from the test voltage stated within the datasheet.

These safety concerns are equally applicable to components that utilize functional isolation beyond wire coating (i.e. physical barriers or spacing).

### 13 TYPICAL PERFORMANCE CURVES

If not otherwise specified, the following conditions apply:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = 24\text{V}$ ,  $I_{OUT} = 1.2\text{A}$ .

#### 13.1 Radiated and Conducted Emissions EN55032 (CISPR-32) Class B Compliance

The 1750105311 power module is tested with a standard EMC configuration (1m wire between the module and the load) to give more realistic information about implementation in the applications. The test setup is based on CISPR-16 with the limit values taken from CISPR-32.

Measured with module on the design example shown in chapter [DESIGN EXAMPLE](#) in a Fully Anechoic Room (FAR) at 3m antenna distance.

##### 13.1.1 Radiated Emissions EN55032 (CISPR-32) Class B Compliant Test Setup

- Measured in a Fully Anechoic Room (FAR) at 3m antenna distance
- Input wire length: 160cm (80cm horizontal + 80cm vertical)
- Output wire length: 1m

##### 13.1.2 Conducted Emissions EN55032 (CISPR-32) Class B Compliant Test Setup

- Measurement input wire length: 80cm
- Output wire length: 1m

### 13.1.3 Radiated And Conducted Emissions

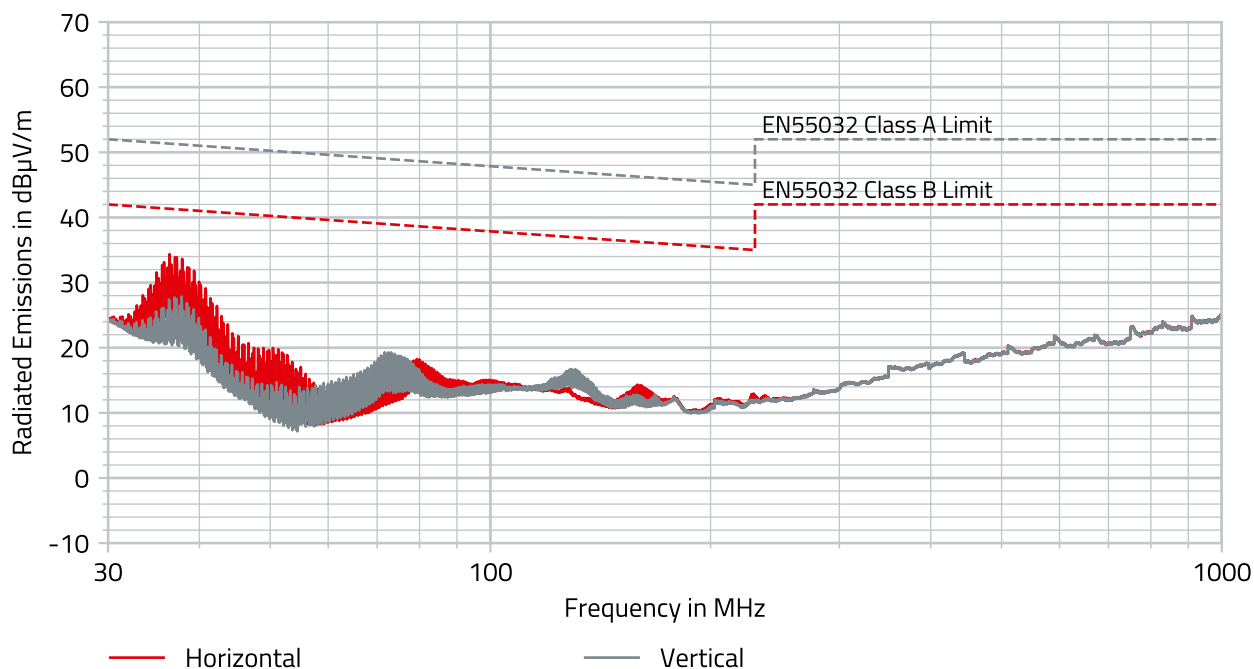


Figure 3: Radiated emissions 1750105311  $V_{IN} = 24V$ ,  $V_{OUT} = 5V$ ,  $I_{LOAD} = 1.2A$  with input LC-filter shown in [DESIGN EXAMPLE](#).

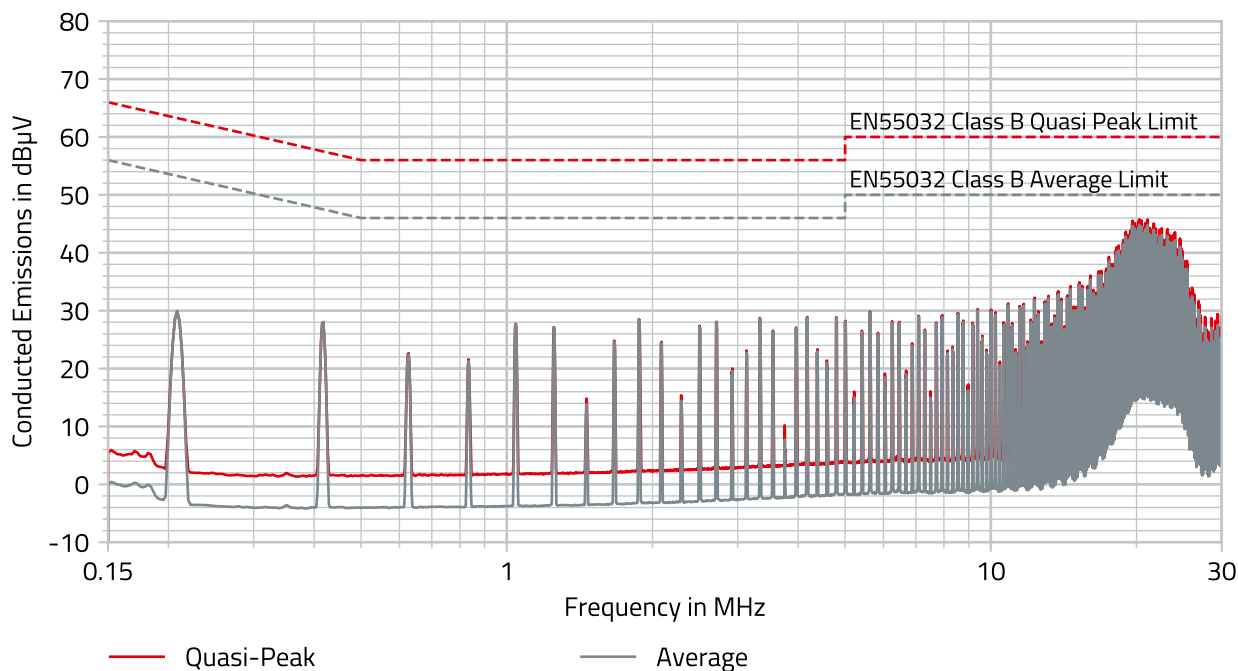


Figure 4: Conducted emissions 1750105311  $V_{IN} = 24V$ ,  $V_{OUT} = 5V$ ,  $I_{LOAD} = 1.2A$  with input LC-filter shown in [DESIGN EXAMPLE](#).

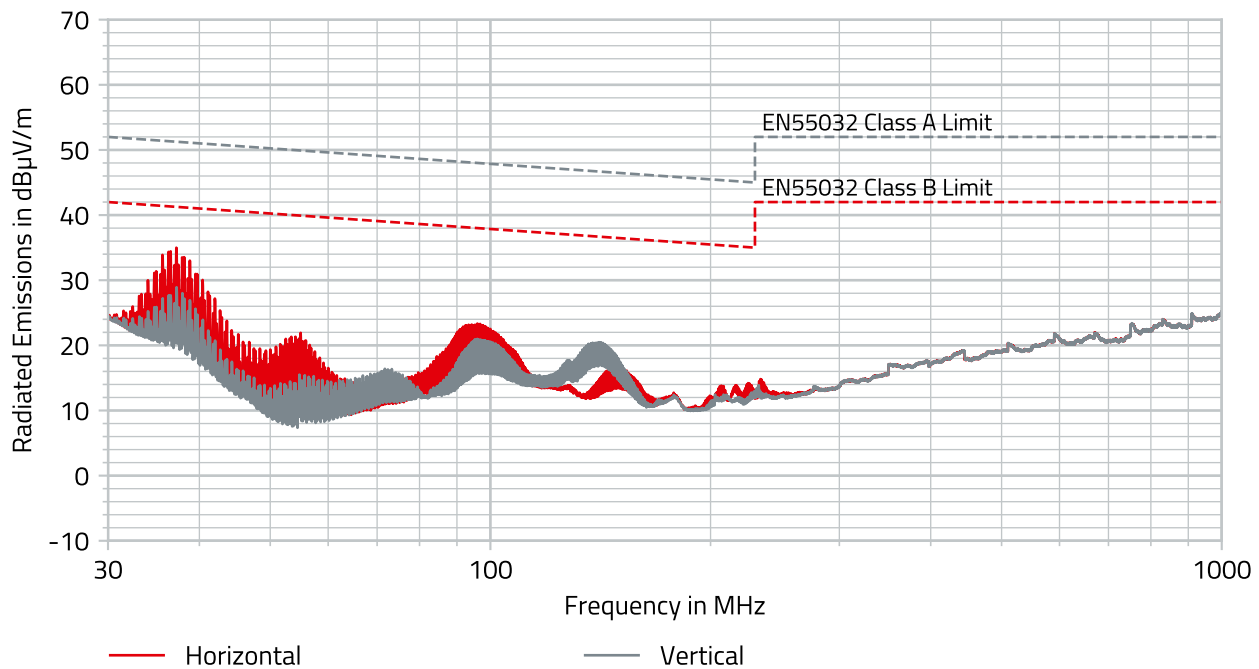


Figure 5: Radiated emissions 1750105311  $V_{IN} = 24V$ ,  $V_{OUT} = 5V$ ,  $I_{LOAD} = 1.2A$  without input LC-filter.

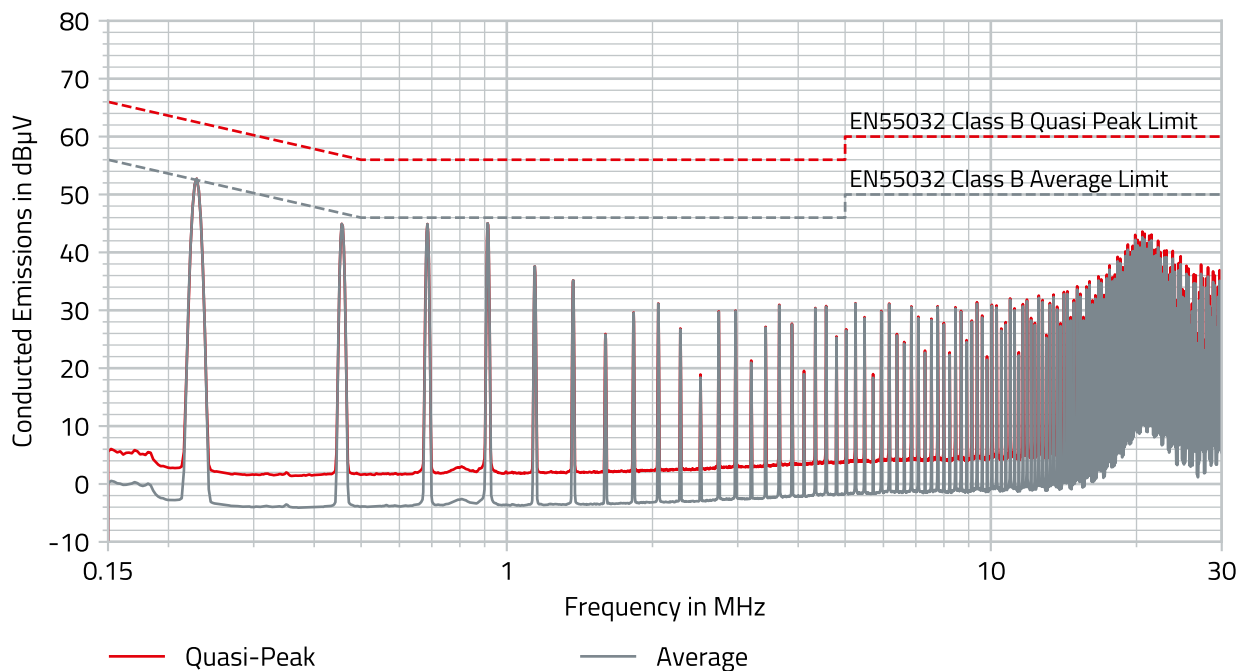


Figure 6: Conducted emissions 1750105311  $V_{IN} = 24V$ ,  $V_{OUT} = 5V$ ,  $I_{LOAD} = 1.2A$  without input LC-filter.

## 13.2 DC Performance Curves

### 13.2.1 Efficiency

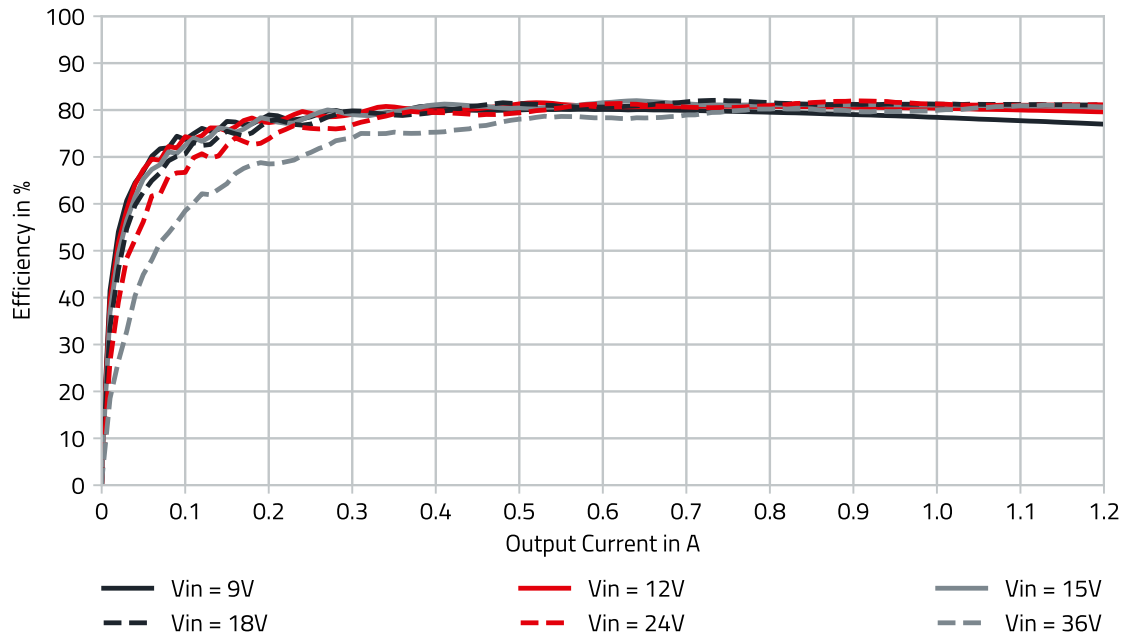


Figure 7: Efficiency.

### 13.2.2 Temperature Derating

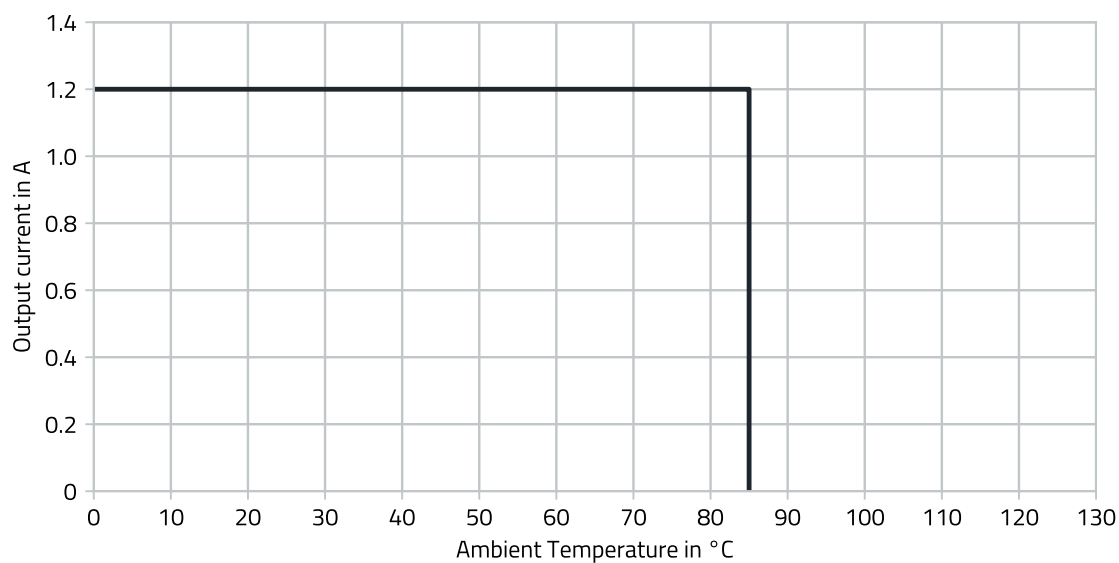


Figure 8: Output current thermal derating  $V_{IN}=24V$ .

**Note:** Module is capable to deliver full output power throughout ambient temperature and input voltage range.

### 13.2.3 Load Regulation 5V<sub>OUT</sub>

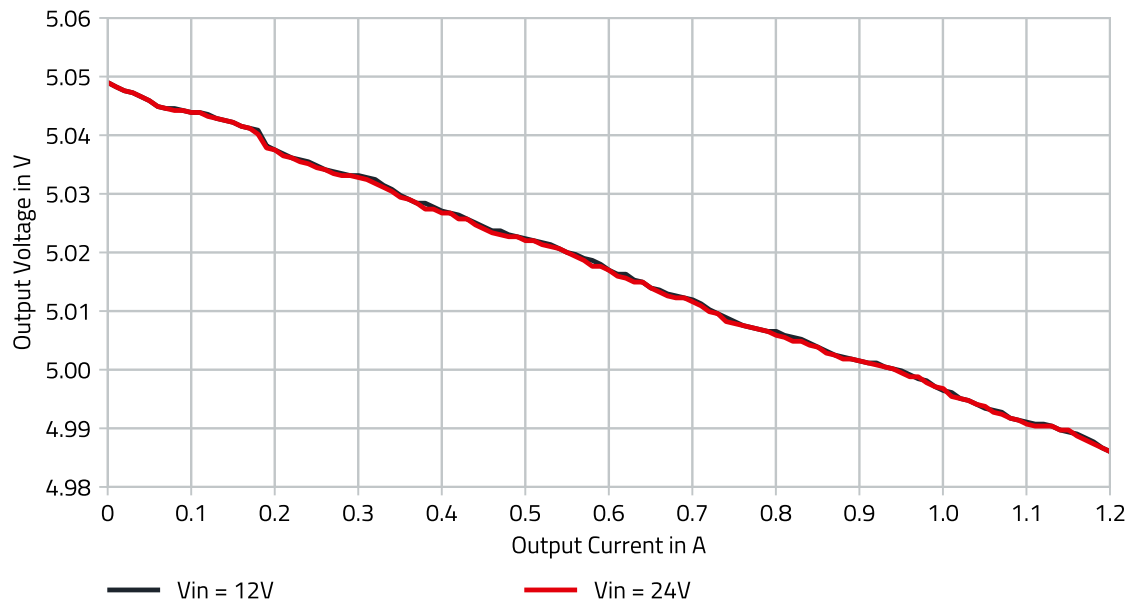


Figure 9: 1750105311 Load Regulation V<sub>OUT</sub> = 5V.

### 13.2.4 Line Regulation 5V<sub>OUT</sub>

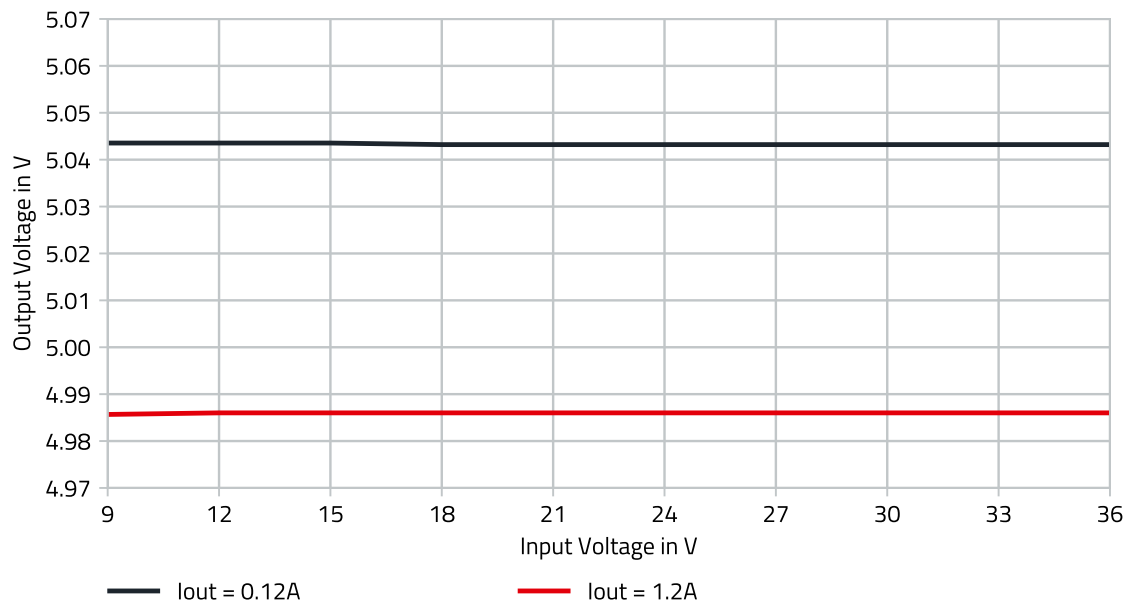


Figure 10: 1750105311 Line Regulation V<sub>OUT</sub> = 5V.

## 14 BLOCK DIAGRAM

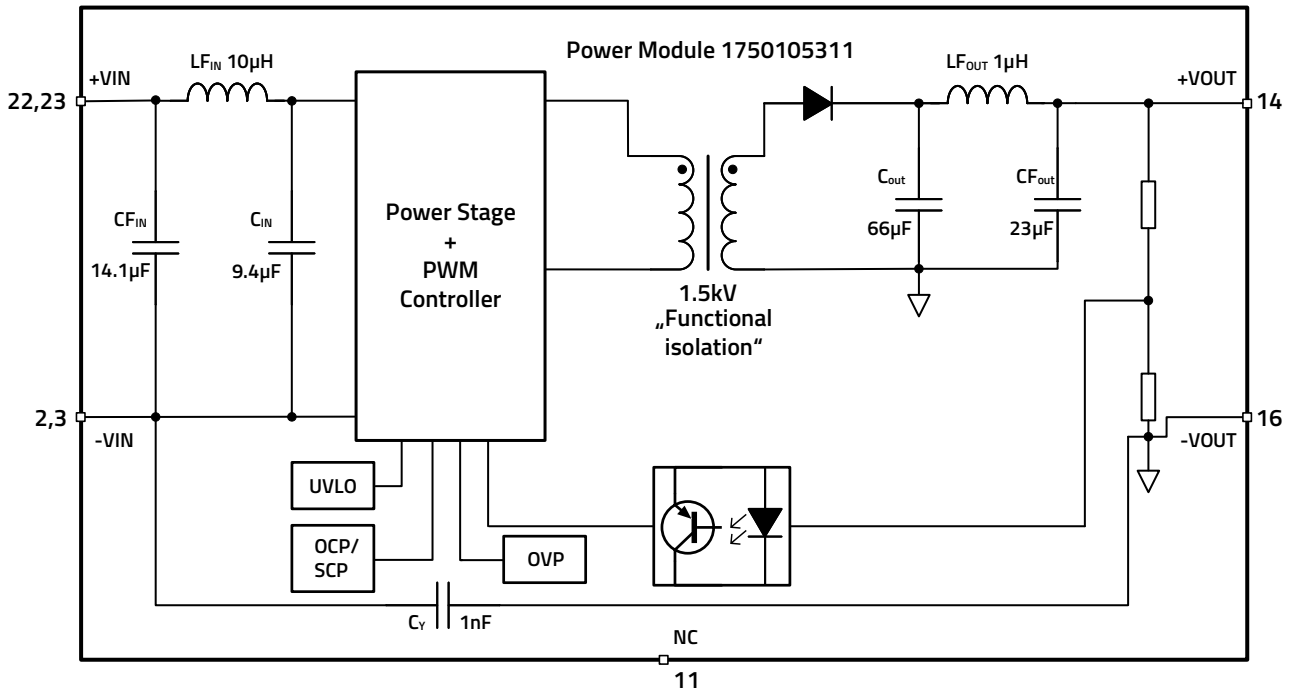


Figure 11: Block diagram.

## 15 CIRCUIT DESCRIPTION

The MagI<sup>3</sup>C power module 1750105311 is based on a flyback topology and integrates the PWM controller IC, primary-side switching stage, transformer, rectifying diode, input filter, and output filter into a single package. The functional isolation barrier is implemented by two independent paths: the power transfer path through the integrated transformer, and the output voltage feedback path through an optocoupler, ensuring galvanic separation between input and output under all operating conditions. The integrated input LC filter attenuates input-side conducted noise, while the integrated Y-capacitor provides a low-impedance path for common-mode currents across the isolation barrier.

In this respect, the module includes an internal Y-capacitor of 1 nF, and for the reference design example an additional external Y-capacitor of 2.2 nF is recommended to achieve Class B EMI compliance. Depending on the final application, for example in cases of shorter output cable length or otherwise improved system conditions, the external Y-capacitor may not be required; however, this must be verified in the end application by EMC testing.

In addition, the integrated output LC filter significantly reduces the output voltage ripple, resulting in a typical peak-to-peak ripple of 7 mVpp at full load without the need for additional external filtering.

## **16 MODE OF OPERATION**

Throughout the complete specified operating range, the 1750105311 module operates in PWM mode. This operating principle ensures consistent switching behavior and stable regulation performance over the full input voltage and load current range.

### **16.1 PWM Operation**

In PWM mode, the module operates at a fixed switching frequency. During each switching cycle, energy is stored in the integrated transformer while the primary switch is conducting and transferred to the output during the subsequent off-time. The output voltage is regulated on a cycle-by-cycle basis by controlling the energy transferred per switching cycle. This control method enables stable output voltage regulation under varying input voltage and load conditions.

The fixed-frequency PWM operation provides consistent dynamic behavior throughout the operating range of the module and supports fast response to line and load transients. In addition, the defined switching characteristic simplifies system design with regard to predictable converter behavior and EMI performance.

## 17 OUTPUT VOLTAGE RIPPLE

Due to the integrated input and output filters, the output voltage ripple is significantly reduced without the need for extensive external filtering. The measured peak-to-peak ripple is approximately 7 mVpp under full load conditions (see Figure 12).

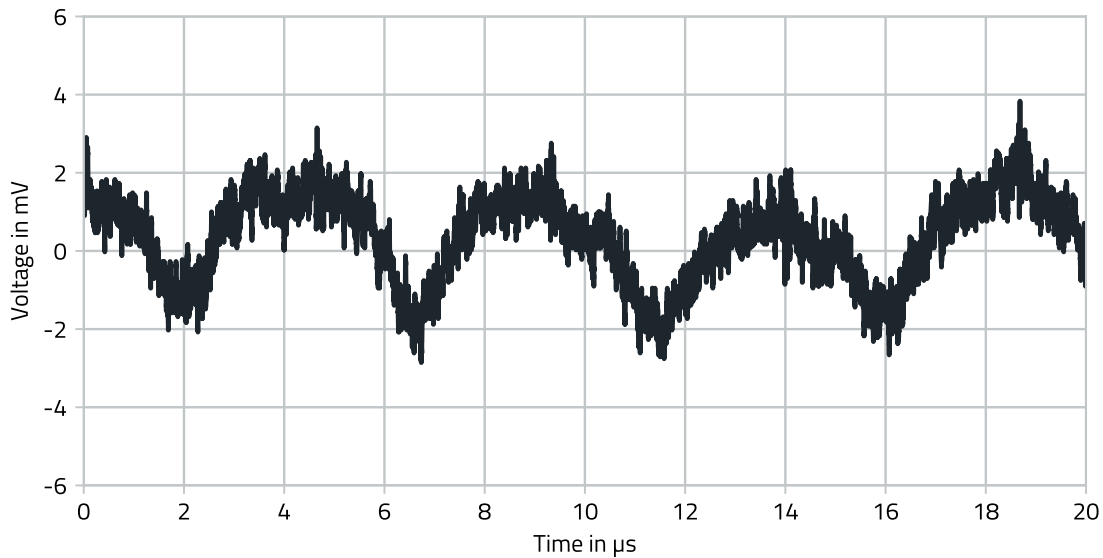


Figure 12: Output Voltage Ripple  $V_{IN} = 24V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 1.2A$ ,  $C_{OUT} = 10\mu F$ .

## 18 PROTECTION FEATURES

### 18.1 Over Current Protection (OCP)

The 1750105311 power module provides continuous protection against overcurrent and short-circuit conditions at the output. When the output current exceeds the overcurrent protection (OCP) threshold indicated in the [Electrical Specifications](#), the module limits the energy transferred per switching cycle to protect the internal components. Under this condition, the output voltage decreases with increasing load current, signaling an overload condition to the system.

### 18.2 Short Circuit Protection (SCP)

The short-circuit protection (SCP) provides additional protection in the event of a complete output short circuit. When the output voltage collapses due to a short-circuit fault, the module detects the loss of regulation and enters hiccup mode, disabling the switching operation after a defined blanking time. It then periodically attempts to restart via the internal soft-start sequence until the fault is removed.

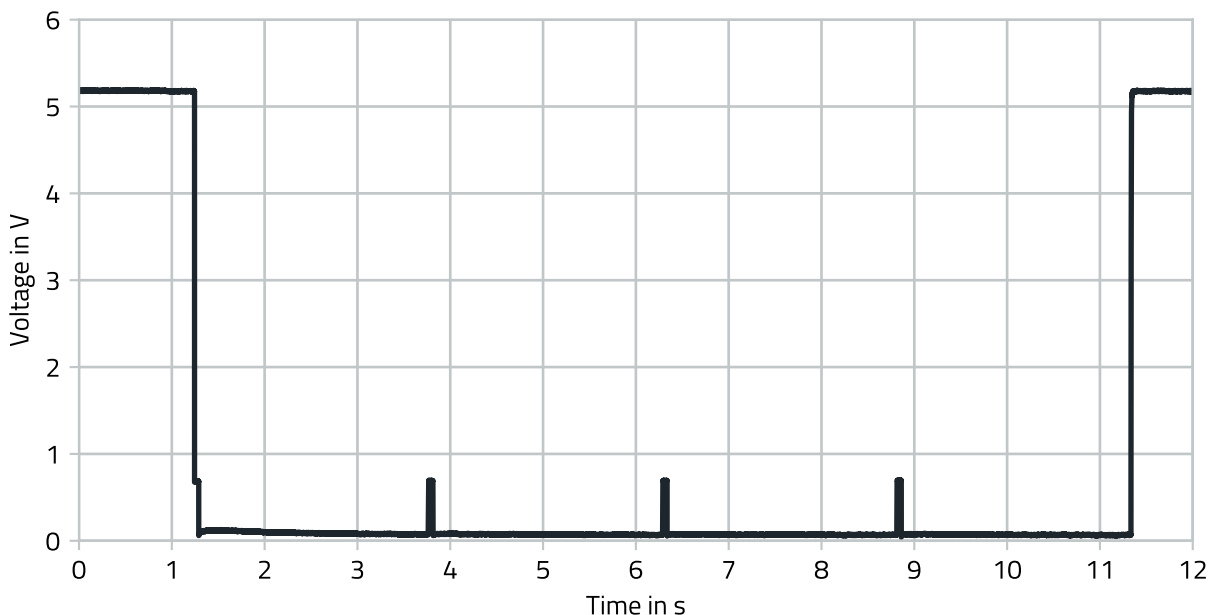


Figure 13: Short circuit protection.

### 18.3 Integrated UVLO

The device incorporates an internal input undervoltage lockout (UVLO) to protect against unexpected behavior at input voltages below the recommended values. The thresholds of the internal UVLO are indicated in the [Electrical Specifications](#).

This function is often used in battery-powered systems to prevent deep discharge of the system battery.

### 18.4 Output Over Voltage Protection (OVP)

The 1750105311 power module incorporates an output overvoltage protection to prevent damage to the load and downstream circuitry in case of a regulation failure. The typical threshold to trigger the protection is between 110% and 160% of the nominal output voltage as indicated in the [Electrical Specifications](#). During such fault condition the module disables the switching operation and attempts a soft-start restart after a defined recovery time, protecting the application from sustained overvoltage conditions.

### 18.5 Soft-Start

The MagI<sup>3</sup>C power module implements an internal soft-start in order to limit the inrush current and avoid output voltage overshoot during start-up. The typical duration of the soft-start is around 1.2ms (see figure 14).

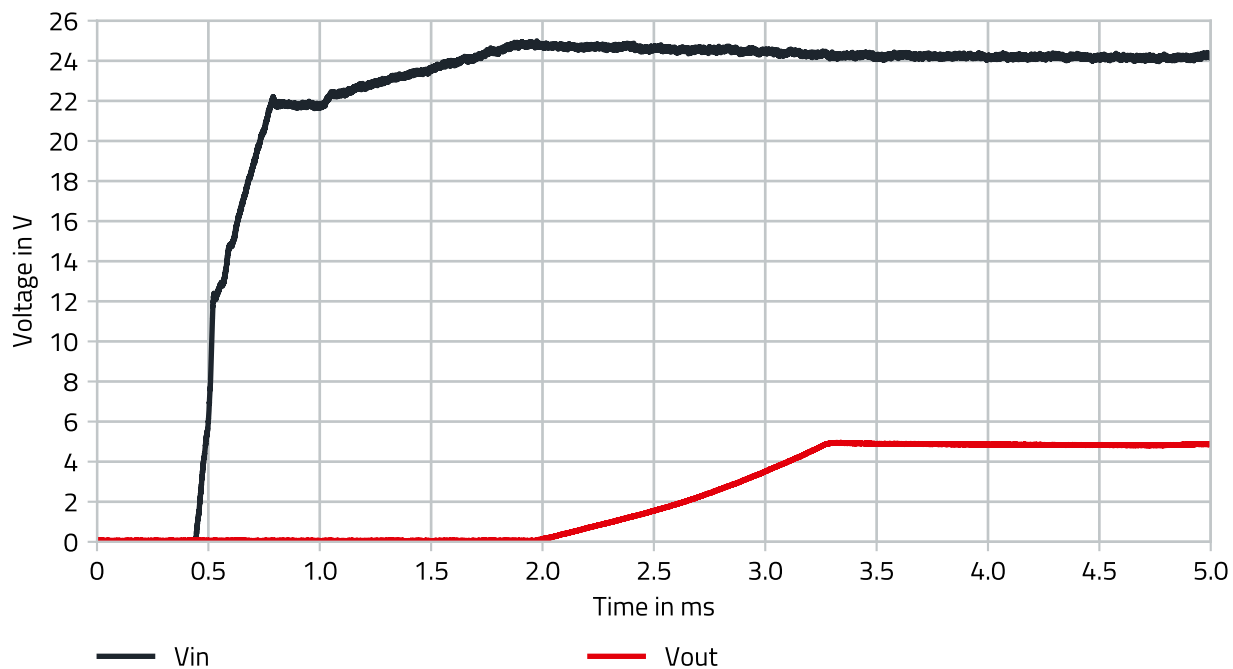


Figure 14: Soft-start.

## 19 DESIGN EXAMPLE - EN55032

This design example shows a possible solution for 24V to 5V with a max. I<sub>out</sub> of 1.2A. All of the necessary components to fulfill the requirements of the CISPR-32 EMI conducted and radiated emissions tests are included in the design example. The design example passes the conducted emissions class B with additional input filtering and Y capacitor, and passes the radiated emissions class B in a FAR at 3m measurement distance with 0.8m horizontal, 0.8m vertical input and 1m horizontal output lines. Without external filter inductor, the design example passes conducted and radiated class A emission requirements, using 0.8m input and 1m output lines for conducted and 0.8m horizontal, 0.8m vertical input and 1m horizontal output lines for radiated measurements. In that case, the filter capacitor should be moved close to the module. In the final application, filter components may be omitted depending on the requirements.

### 19.1 Layout

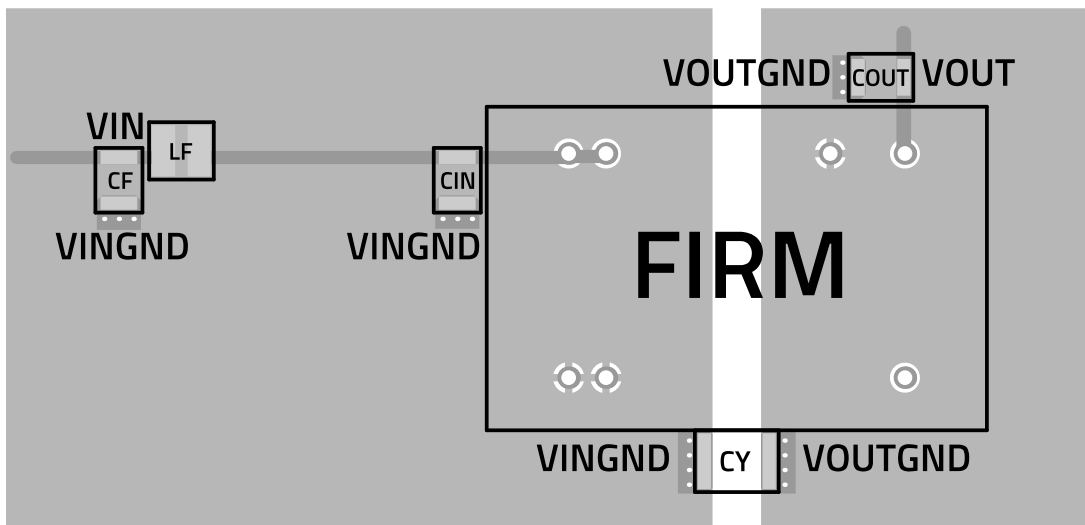


Figure 15: Layout recommendation to pass CISPR-32 class B radiated and conducted emissions.

The layout above has been evaluated to provide the optimal performance in terms of transient response, efficiency, ripple and EMI. The design footprint can be reduced at the expense of performance in these parameters. The following recommendation should be followed when designing the layout:

1. The input capacitor should be placed as close as possible to the +VIN and -VIN pins of the device.
2. The output capacitor should be placed as close as possible to the +VOUT and -VOUT pins of the device.
3. The Y-capacitor should be placed as close as possible to the -VIN and -VOUT pins of the device.

**Note:** Class A can be passed, when the filter inductor is left out and the filter capacitor is moved close to the input capacitor. Differences in conducted and radiated EMI emissions can be evaluated in the [EMI](#) section.

## 19.2 Schematic

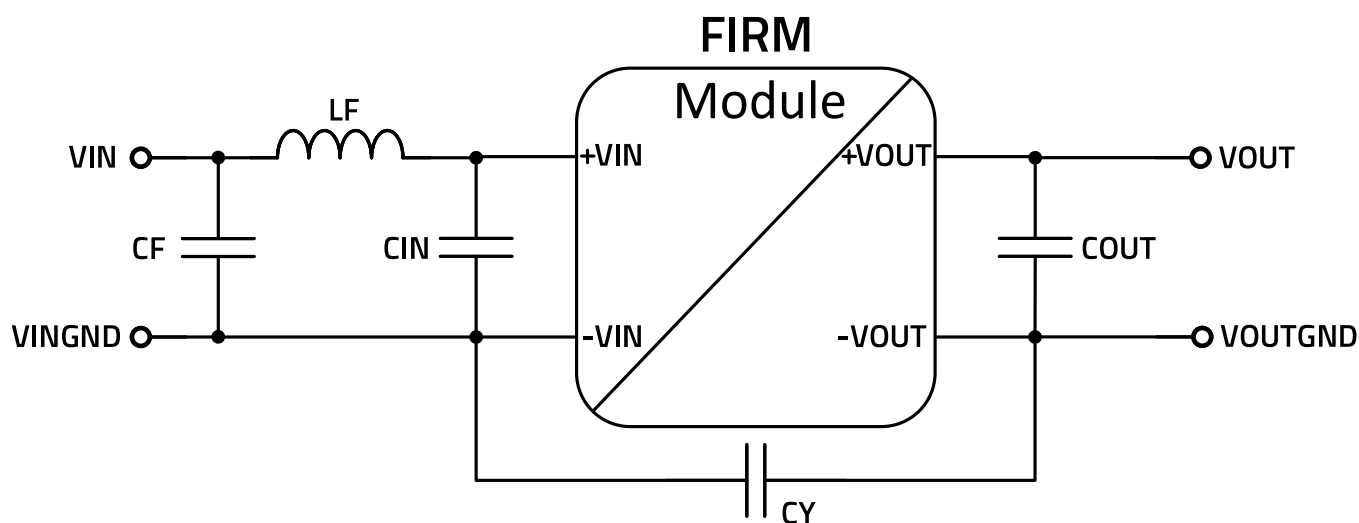


Figure 16: 1750105311 recommended external component schematic.

## 19.3 Bill of Materials

Table 13: 1750105311 recommended external components bill of materials.

| DESIGNATOR | DESCRIPTION                                     | FUNCTION                                     | QUANTITY | ORDER CODE   | MANUFACTURER |
|------------|-------------------------------------------------|----------------------------------------------|----------|--------------|--------------|
| FIRM       | MagI <sup>3</sup> C Power Module                | Power supply                                 | 1        | 1750105311   | WE           |
| CF         | Ceramic chip capacitor<br>10μF/50V X7R, 1210    | Input Filter /<br>Electrical<br>Performance  | 1        | 885012209073 | WE           |
| LF         | Filter inductor<br>4.7μH/1.16A PD2, 3521        | Input Filter                                 | 1        | 7447732047   | WE           |
| CIN        | Ceramic chip capacitor<br>10μF/50V X7R, 1210    | Input Filter /<br>Electrical<br>Performance  | 1        | 885012209073 | WE           |
| COUT       | Ceramic chip capacitor<br>10μF/10V X7R, 1210    | Output Filter /<br>Electrical<br>Performance | 1        | 885012209005 | WE           |
| CY         | Ceramic chip capacitor<br>2.2nF/2000V X7R, 1808 | Y-Cap                                        | 1        | 885342210002 | WE           |

**Note:** If only passing Class A is required, the filter inductor LF can be left out and the filter capacitor CF is moved close to the module. Differences in conducted and radiated EMI emissions can be evaluated in the [EMI](#) section.

## 20 DESIGN EXAMPLE - FULL EMC COMPLIANCE

This design example shows a possible solution for 24V to 5V with a max. I<sub>out</sub> of 1.2A. All of the necessary components to fulfill the requirements of the CISPR-32 EMI conducted and radiated emissions tests as well as the IEC/EN61000-4 immunity tests are included in the design example. The design example passes the conducted emissions class B with additional input filtering and Y capacitor, and passes the radiated emissions class B in a FAR at 3m measurement distance with 0.8m horizontal, 0.8m vertical input and 1m horizontal output lines. Without external emission filter inductor, the design example passes conducted and radiated class A emission requirements, using 0.8m input and 1m output lines for conducted and 0.8m horizontal, 0.8m vertical input and 1m horizontal output lines for radiated measurements. In that case, the emission filter capacitor should be moved close to the module. The shown immunity filter is only required to pass conducted immunity (Surge). In the final application, filter components may be omitted depending on the requirements.

### 20.1 Layout Full EMC Compliance

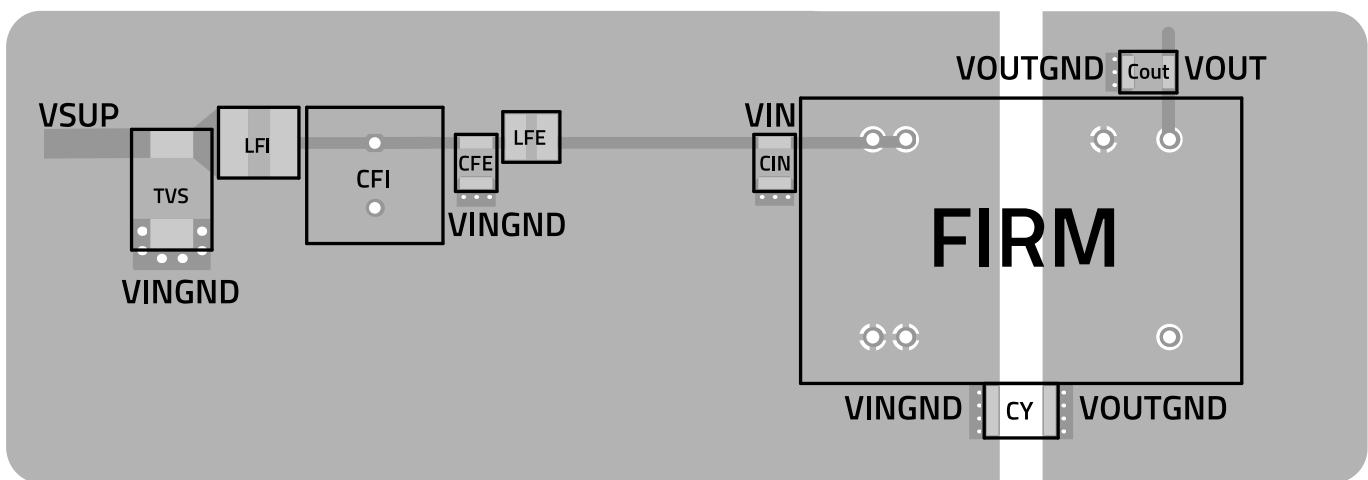


Figure 17: Layout recommendation for full EMC compliance.

The layout above has been evaluated to provide the optimal performance in terms of transient response, efficiency, ripple and EMI. The design footprint can be reduced at the expense of performance in these parameters. The following recommendation should be followed when designing the layout:

1. The input capacitor should be placed as close as possible to the +VIN and -VIN pins of the device.
2. The output capacitor should be placed as close as possible to the +VOUT and -VOUT pins of the device.
3. The Y-capacitor should be placed as close as possible to the -VIN and -VOUT pins of the device.

**Note:** Class A can be passed, when the emissionfilter inductor is left out and the emission filter capacitor is moved close to the input capacitor. Differences in conducted and radiated EMI emissions can be evaluated in the [EMI](#) section. Immunity filter is only required to pass Surge.

## 20.2 Schematic Full EMC Compliance

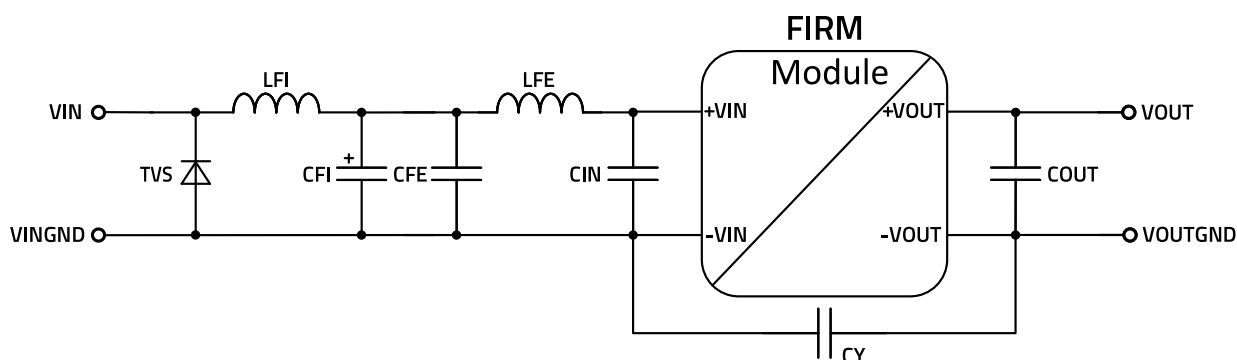


Figure 18: 1750105311 recommended external component schematic for full EMC compliance.

## 20.3 Bill of Materials Full EMC Compliance

Table 14: 1750105311 recommended external components for full EMC compliance bill of materials.

| DESIGNATOR | DESCRIPTION                                             | FUNCTION                                       | QUANTITY | ORDER CODE   | MANUFACTURER |
|------------|---------------------------------------------------------|------------------------------------------------|----------|--------------|--------------|
| FIRM       | MagI <sup>3</sup> C Power Module                        | Power supply                                   | 1        | 1750105311   | WE           |
| TVS        | Power TVS Diode, Unidirectional, 3000W, 33VDC, DO-214AB | Input Filter Immunity                          | 1        | 824550331    | WE           |
| CFI        | Aluminum electrolytic capacitor 270μF/50V               | Input Filter Immunity                          | 1        | 860160675027 | WE           |
| LFI        | Filter inductor 33μH/1.09A PD2, 5848                    | Input Filter Immunity                          | 1        | 744774133    | WE           |
| CFE        | Ceramic chip capacitor 10μF/50V X7R, 1210               | Input Filter Emission / Electrical Performance | 1        | 885012209073 | WE           |
| LFE        | Filter inductor 4.7μH/1.16A PD2, 3521                   | Input Filter Emission                          | 1        | 7447732047   | WE           |
| CIN        | Ceramic chip capacitor 10μF/50V X7R, 1210               | Input Filter / Electrical Performance          | 1        | 885012209073 | WE           |
| COUT       | Ceramic chip capacitor 10μF/10V X7R, 1210               | Output Filter / Electrical Performance         | 1        | 885012209005 | WE           |
| CY         | Ceramic chip capacitor 2.2nF/2000V X7R, 1808            | Y-Cap                                          | 1        | 885342210002 | WE           |

**Note:** Class A can be passed, when the emissionfilter inductor is left out and the emission filter capacitor is moved close to the input capacitor. Differences in conducted and radiated EMI emissions can be evaluated in the [EMI](#) section. Immunity filter is only required to pass Surge.

## 21 APPLICATION CONSIDERATIONS

### 21.1 Primary Side Parallel Connection

A standard industrial configuration is, that the power modules are supplied by a dc bus voltage. Multiple 1750105311 can be connected to one dc bus as shown in the figure below.

The outputs must not be connected in parallel to each other and could have individual voltages  $V_{OUT1}$  and  $V_{OUT2}$ . For serial connection of the output see also [Secondary Side Serial Connection](#).

In case of using long supply lines or different wire length for each 1750105311 it is recommended to decouple each power module with an additional LC filter (see schematic below). The decoupling LC filter is also recommended if the supplying dc bus has a high impedance so that high voltage swings at the input of each power module might be present.

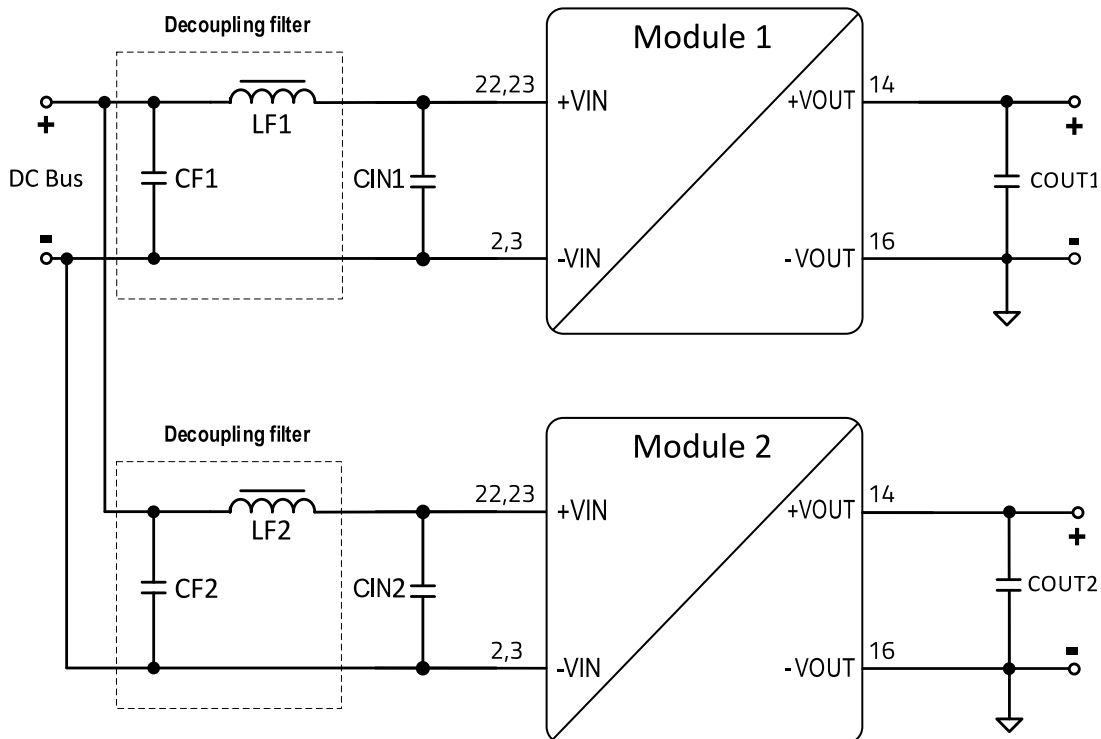


Figure 19: Decoupling for primary side parallel connection.

As a starting point for the decoupling filters, use the values of the reference filters - see also [DESIGN EXAMPLE](#). The final appropriate filter for the application has then to be evaluated under operation in the target application by checking e.g. the change of the input ripple voltage.

## 21.2 Secondary Side Serial Connection

To generate a higher output voltage it is possible to put the outputs of the 1750105311 in series. It is common practice to connect an additional capacitor between the +VOUT and -VOUT.

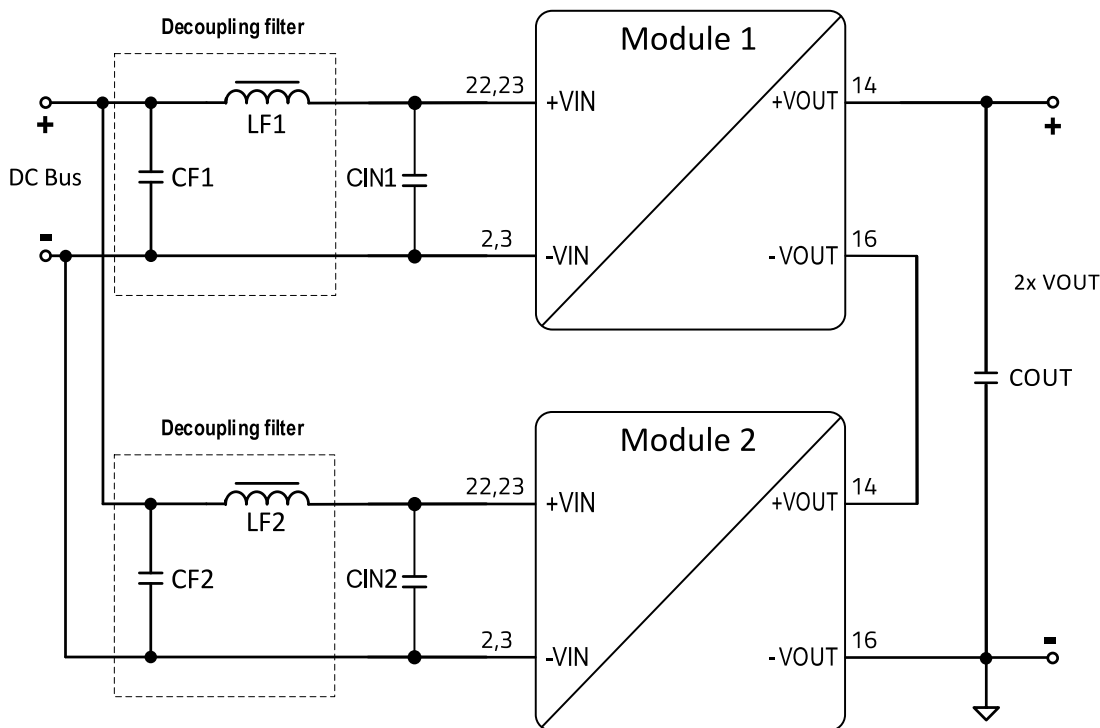


Figure 20: Secondary side serial connection.

In case of using long supply lines or different line length for each 1750105311 it is recommended to decouple each power module with an additional LC filter. The decoupling LC filter is also recommended for applications that have a high impedance dc bus as the supply to prevent high input voltage swings from being seen at the power module input. The EMI filter shown in [DESIGN EXAMPLE](#) can be used as an initial design. The final appropriate filter for the application should be evaluated under operation in the desired application.

### 21.3 Generating Complementary Output Voltages

Another common requirement in industrial applications is to provide a complementary voltage ( $\pm 5V$ ). This can be easily implemented by using two 1750105311 modules according to the schematic below. It is a common practice to connect an additional capacitor across each output voltage.

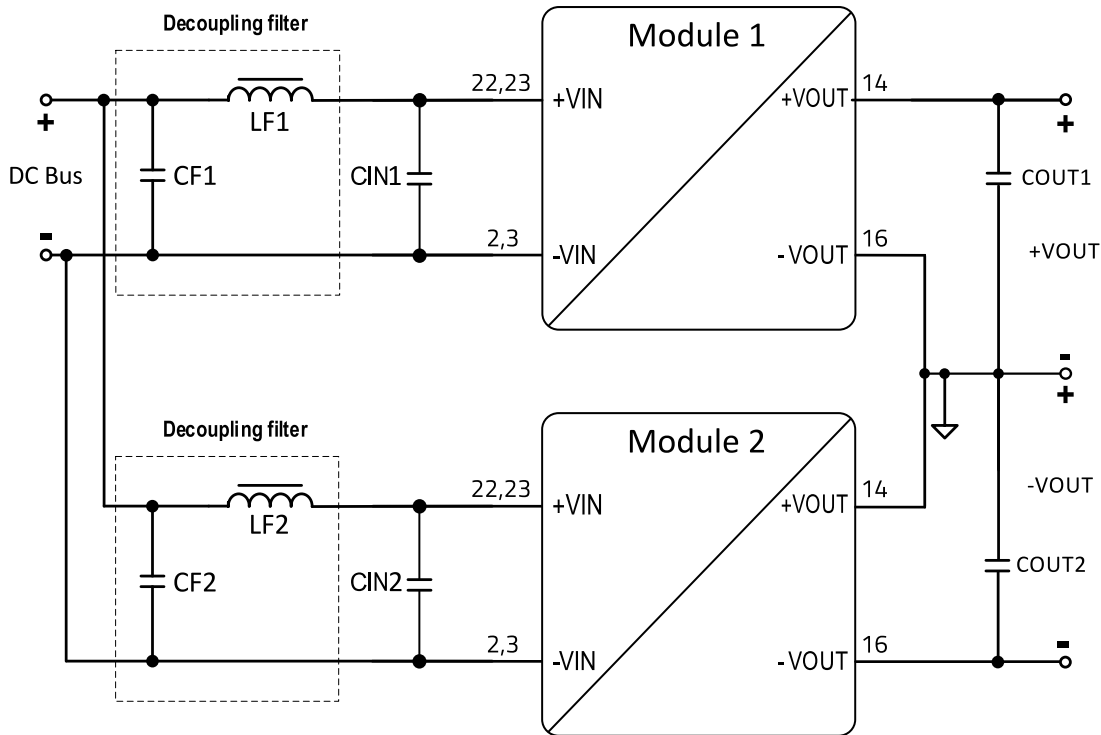


Figure 21: Generating complementary output voltages.

In case of using long supply lines or different line length for each 1750105311 it is recommended to decouple each power module with an additional LC filter. The decoupling LC filter is also recommended for applications that have a high impedance dc bus as the supply to prevent high input voltage swings from being seen at the power module input. The EMI filter shown in [DESIGN EXAMPLE](#) can be used as an initial design. The final appropriate filter for the application should be evaluated under operation in the desired application.

## 21.4 Reverse Polarity Protection

A simple way of creating an input reverse polarity protection is to place a diode in series with the positive input line. Due to the forward voltage drop of the diode the application efficiency drops.

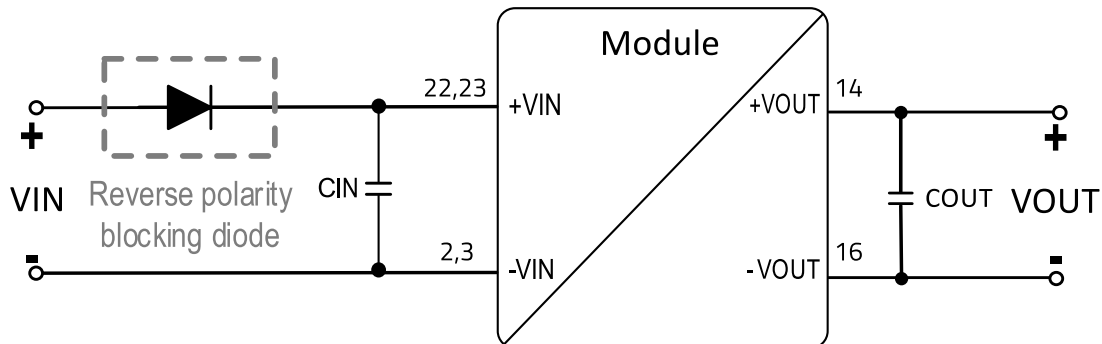


Figure 22: Reverse polarity protection.

## 22 HANDLING RECOMMENDATIONS

1. According to JEDEC J-STD033 an MSL classification is not applicable for THT components. Therefore the power module does not require special handling or storage to protect it from ambient moisture.
2. The profile below is valid for wave soldering only.

### 22.1 Solder Profile

Table 15: Wave solder profile according to EN61760-1:2006.

| Profile Feature                             | Value                         |
|---------------------------------------------|-------------------------------|
| Final preheat temperature $T_s$             | 120°C                         |
| Preheat Time                                | 70s                           |
| Ramp-up Rate $\Delta T$ from $T_s$ to $T_p$ | 150°C max.                    |
| Peak temperature $T_p$                      | 250°C-260°C                   |
| Time within peak temperature $t_p$          | max. 10s<br>max. 5s each wave |
| Ramp-down rate                              | -3.5°C/s                      |
| Time 25°C to 25°C                           | 4 minutes                     |

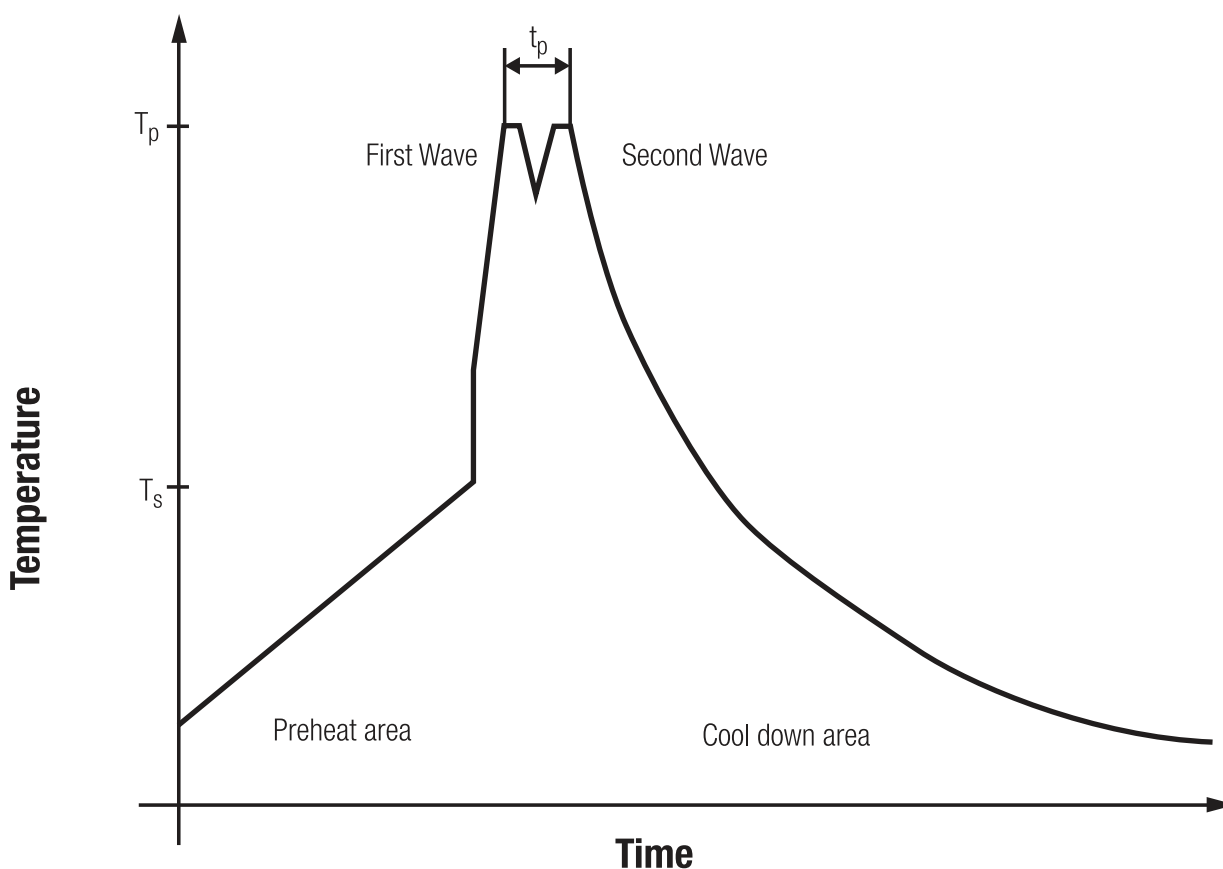


Figure 23: Wave solder profile according to EN61760-1:2006.

### Manual Soldering

1. Maximum soldering temperature should not exceed  $365^{\circ}\text{C} \pm 15^{\circ}\text{C}$ .
2. Maximum soldering time: max. 3 seconds

## 23 PHYSICAL DIMENSIONS

### 23.1 Component

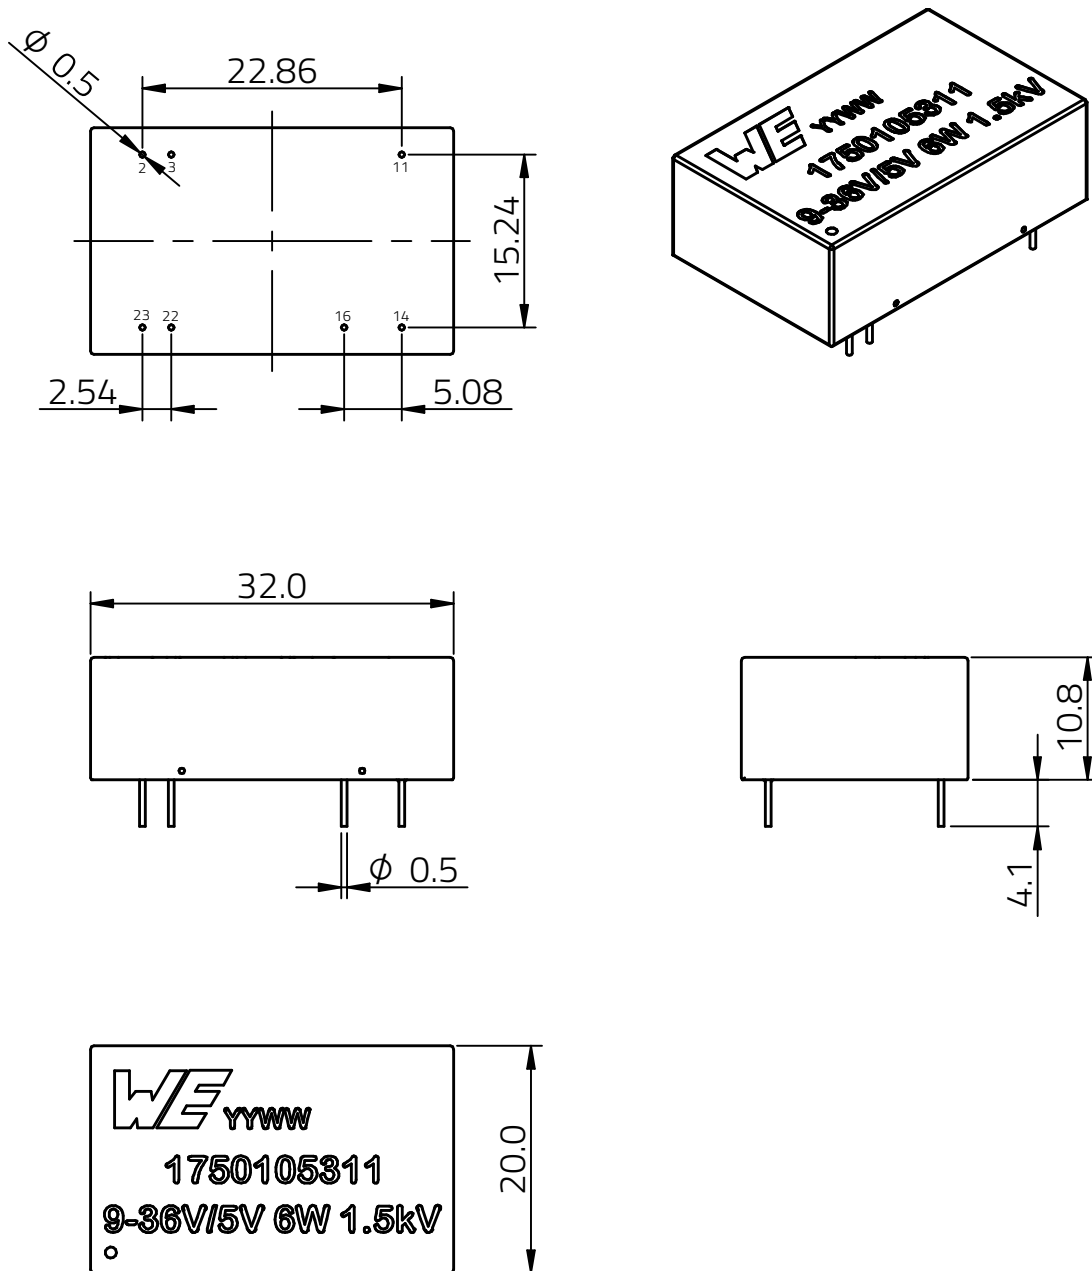


Figure 24: Physical dimensions.

All dimensions in mm  
 Tolerance: xx.x =  $\pm 0.5\text{mm}$  ; xx.xx =  $\pm 0.25\text{mm}$  unless otherwise noted

## 23.2 Recommended Drill Holes

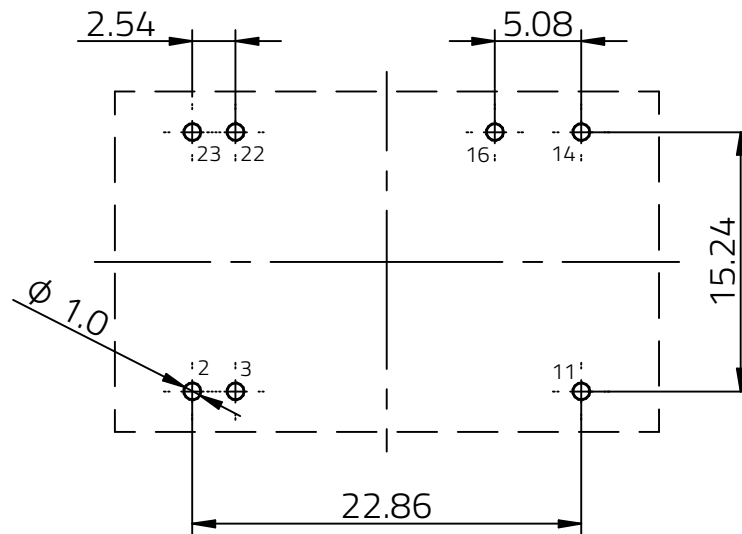


Figure 25: Recommended drill hole dimensions.

All dimensions in mm

23.3 Packaging

23.3.1 Tube

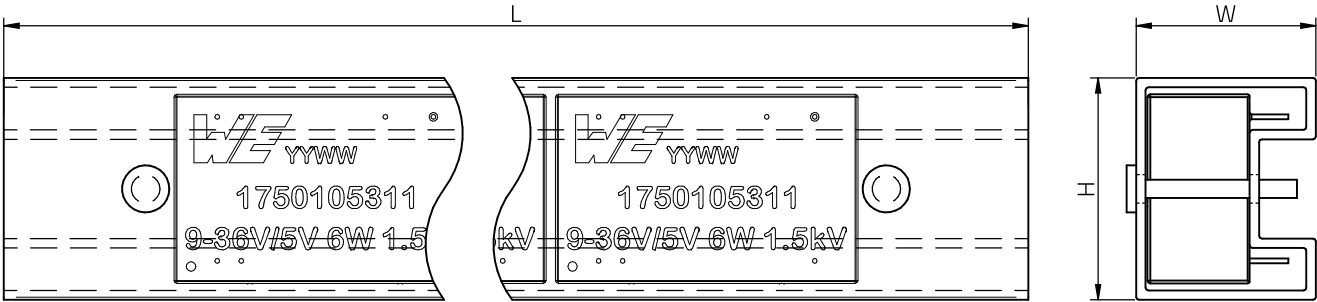


Figure 26: Tube dimensions.

Table 16: Tube dimensions.

| Tube dimension | L     | W    | H      |
|----------------|-------|------|--------|
| Tolerance      | typ.  | typ. | typ.   |
| Value          | 522mm | 19mm | 23.5mm |

23.3.2 Carton

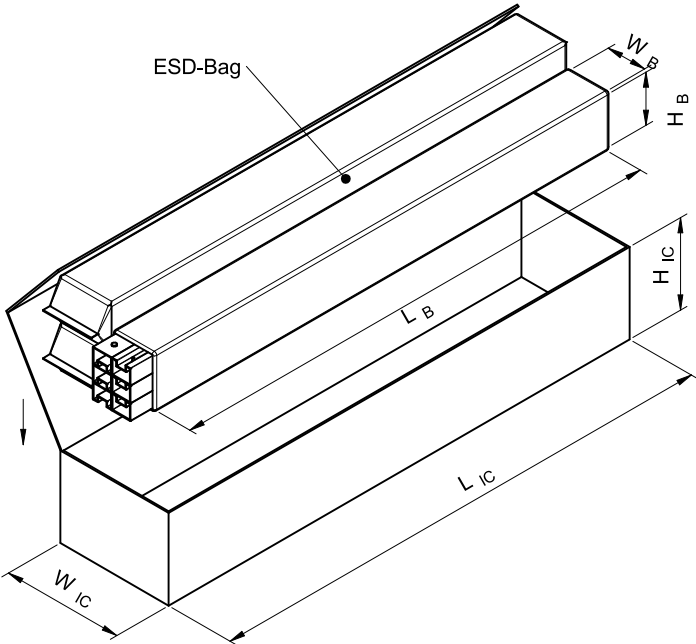


Figure 27: Inner carton and ESD bag dimensions.

Table 17: Inner carton and ESD bag dimensions.

| Inner carton and ESD bag dimension | L <sub>B</sub> | W <sub>B</sub> | H <sub>B</sub> | L <sub>IC</sub> | W <sub>IC</sub> | H <sub>C</sub> |
|------------------------------------|----------------|----------------|----------------|-----------------|-----------------|----------------|
| Tolerance                          | typ.           | typ.           | typ.           | typ.            | typ.            | typ.           |
| Value                              | 570mm          | 43mm           | 51mm           | 575mm           | 135mm           | 100mm          |

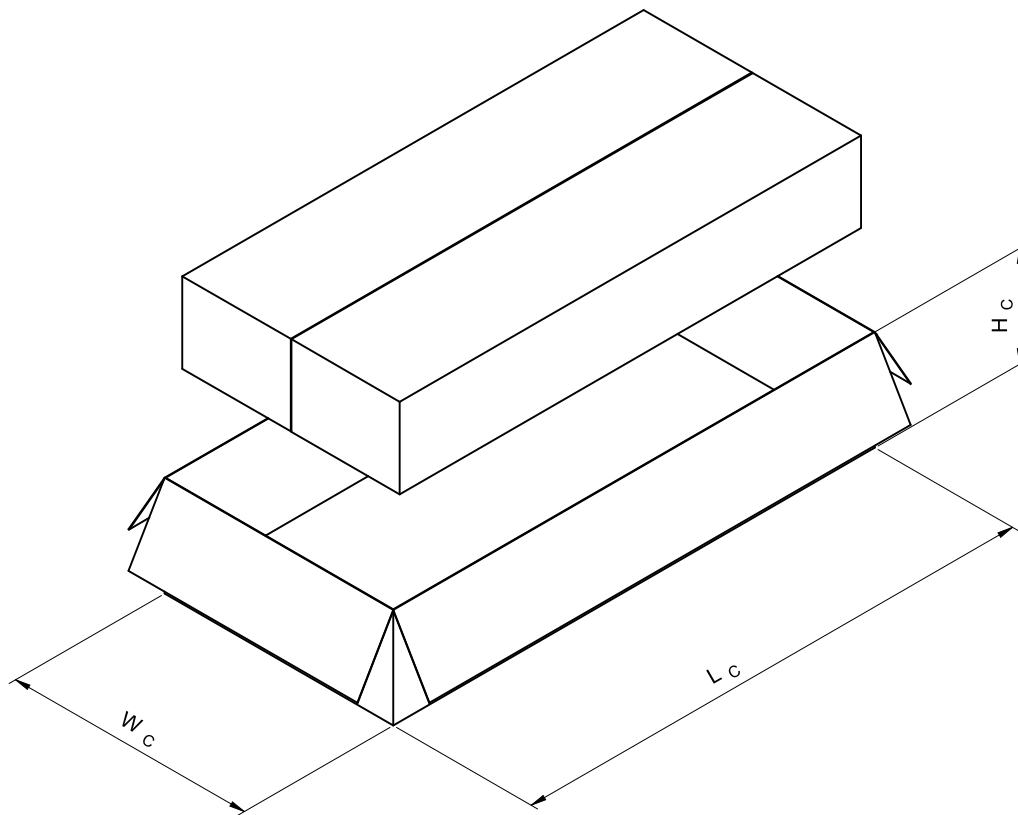


Figure 28: Carton dimensions.

Table 18: Outer carton dimensions.

| Outer carton dimension | $L_c$ | $W_c$ | $H_c$ |
|------------------------|-------|-------|-------|
| Tolerance              | typ.  | typ.  | typ.  |
| Value                  | 600mm | 285mm | 125mm |

24 DOCUMENT HISTORY

Table 19: Document history.

| Revision | Date      | Description                  | Comment |
|----------|-----------|------------------------------|---------|
| 1.0      | July 2026 | Initial release of datasheet |         |

## 25 LIST OF FIGURES

|    |                                                                                                          |    |
|----|----------------------------------------------------------------------------------------------------------|----|
| 1  | Pinout. . . . .                                                                                          | 4  |
| 2  | Dielectric test setup. . . . .                                                                           | 10 |
| 3  | Radiated EMI with input LC-filter. . . . .                                                               | 12 |
| 4  | Conducted EMI with input LC-filter. . . . .                                                              | 12 |
| 5  | Radiated EMI without input LC-filter. . . . .                                                            | 13 |
| 6  | Conducted EMI without input LC-filter. . . . .                                                           | 13 |
| 7  | Efficiency. . . . .                                                                                      | 14 |
| 8  | Output current thermal derating $V_{IN}=24V$ . . . . .                                                   | 14 |
| 9  | Load regulation $V_{OUT} = 5V$ . . . . .                                                                 | 15 |
| 10 | Line regulation $V_{OUT} = 5V$ . . . . .                                                                 | 15 |
| 11 | Block diagram. . . . .                                                                                   | 16 |
| 12 | Output Voltage Ripple $V_{IN} = 24V$ , $V_{OUT} = 5V$ , $I_{OUT} = 1.2A$ , $C_{OUT} = 10\mu F$ . . . . . | 18 |
| 13 | Short circuit protection. . . . .                                                                        | 19 |
| 14 | Soft-start. . . . .                                                                                      | 20 |
| 15 | Layout recommendation. . . . .                                                                           | 21 |
| 16 | 1750105311 recommended external component schematic. . . . .                                             | 22 |
| 17 | Layout recommendation for full EMC compliance. . . . .                                                   | 23 |
| 18 | 1750105311 recommended external component schematic for full EMC compliance. . . . .                     | 24 |
| 19 | Decoupling for primary side parallel connection. . . . .                                                 | 25 |
| 20 | Secondary side serial connection. . . . .                                                                | 26 |
| 21 | Generating complementary output voltages. . . . .                                                        | 27 |
| 22 | Reverse polarity protection. . . . .                                                                     | 28 |
| 23 | Wave solder profile according to EN61760-1:2006. . . . .                                                 | 29 |
| 24 | Physical dimensions. . . . .                                                                             | 30 |
| 25 | Recommended drill hole dimensions. . . . .                                                               | 31 |
| 26 | Tube dimensions. . . . .                                                                                 | 32 |
| 27 | Inner carton and ESD bag dimensions. . . . .                                                             | 32 |
| 28 | Carton dimensions. . . . .                                                                               | 33 |

## 26 LIST OF TABLES

|    |                                                                                               |    |
|----|-----------------------------------------------------------------------------------------------|----|
| 1  | Marking description. . . . .                                                                  | 4  |
| 2  | Pin description. . . . .                                                                      | 4  |
| 3  | Ordering information. . . . .                                                                 | 5  |
| 4  | Sales information. . . . .                                                                    | 5  |
| 5  | Absolute maximum ratings. . . . .                                                             | 6  |
| 6  | Operating conditions. . . . .                                                                 | 6  |
| 7  | Thermal specification. . . . .                                                                | 6  |
| 8  | Electrical specifications. . . . .                                                            | 7  |
| 9  | Electromagnetic Compatibility (EMC). . . . .                                                  | 7  |
| 10 | RoHS, REACH. . . . .                                                                          | 8  |
| 11 | Package specifications. . . . .                                                               | 8  |
| 12 | Reliability. . . . .                                                                          | 8  |
| 13 | 1750105311 recommended external components bill of materials. . . . .                         | 22 |
| 14 | 1750105311 recommended external components for full EMC compliance bill of materials. . . . . | 24 |
| 15 | Wave solder profile according to EN61760-1:2006. . . . .                                      | 29 |
| 16 | Tube dimensions. . . . .                                                                      | 32 |
| 17 | Inner carton and ESD bag dimensions. . . . .                                                  | 32 |
| 18 | Outer carton dimensions. . . . .                                                              | 33 |
| 19 | Document history. . . . .                                                                     | 34 |

## 27 CAUTIONS AND WARNINGS

The following conditions apply to all goods within the product series of MagI<sup>3</sup>C of Würth Elektronik eiSos GmbH & Co. KG:

### General:

- All recommendations according to the general technical specifications of the data-sheet have to be complied with.
- The usage and operation of the product within ambient conditions which probably alloy or harm the component surface has to be avoided.
- The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply for customer specific products
- Residual washing varnish agent that is used during the production to clean the application might change the characteristics of the body, pins or termination. The washing varnish agent could have a negative effect on the long term function of the product. Direct mechanical impact to the product shall be prevented as the material of the body, pins or termination could flake or in the worst case it could break. As these devices are sensitive to electrostatic discharge customer shall follow proper IC Handling Procedures.
- Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Würth Elektronik eiSos GmbH & Co. KG components in its applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos GmbH & Co. KG.
- Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences lessen the likelihood of failures that might cause harm and take appropriate remedial actions
- Customer will fully indemnify Würth Elektronik eiSos and its representatives against any damages arising out of the use of any Würth Elektronik eiSos GmbH & Co. KG components in safety-critical applications

### Product specific:

Follow all instructions mentioned in the datasheet, especially:

- The solder profile has to comply with the technical reflow or wave soldering specification, otherwise this will void the warranty.
- All products are supposed to be used before the end of the period of 12 months based on the product date-code.
- Violation of the technical product specifications such as exceeding the absolute maximum ratings will void the warranty.
- It is also recommended to return the body to the original moisture proof bag and reseal the moisture proof bag again.
- ESD prevention methods need to be followed for manual handling and processing by machinery.

### Disclaimer:

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance. These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

## **28 IMPORTANT NOTES**

### **General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not. Accordingly, the customer is cautioned to verify that the datasheet is current before placing orders.

### **Customer Responsibility Related to Specific, in Particular Safety-Relevant, Applications**

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

### **Best Care and Attention**

Any product-specific notes, warnings and cautions must be strictly observed. Any disregard will result in the loss of warranty.

### **Customer Support for Product Specifications**

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

### **Product R&D**

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard we inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

### **Product Life Cycle**

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

### **Property Rights**

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

### **General Terms and Conditions**

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at [www.we-online.com](http://www.we-online.com).