
**Dimensions:** [mm]

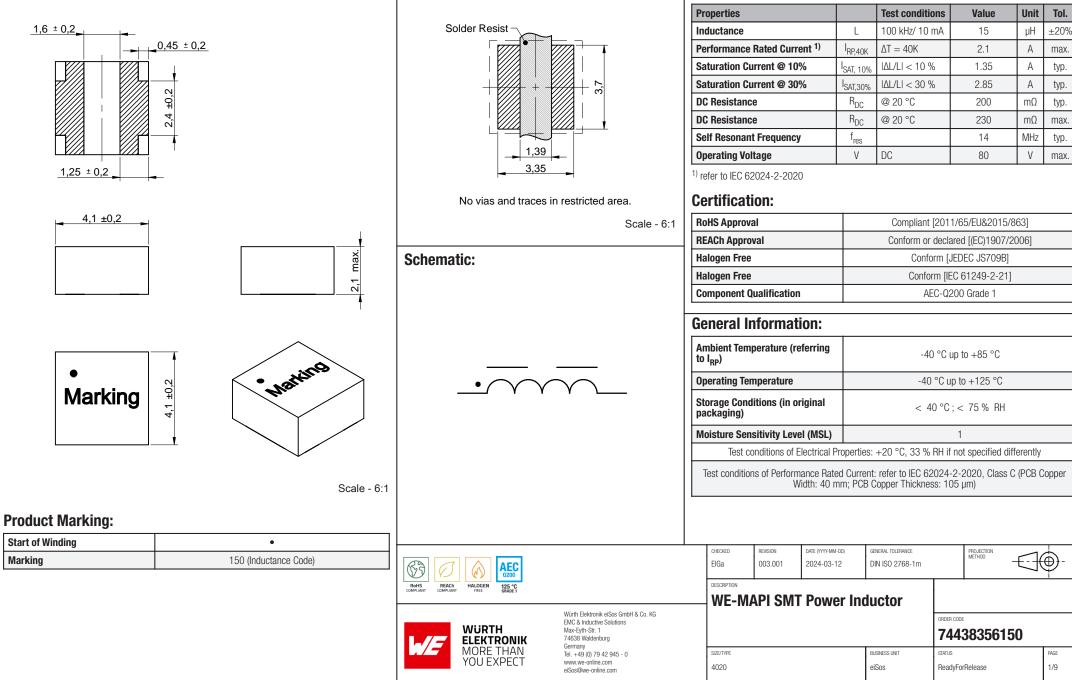


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation, transportation, signal, disaster prevention, medical, public information network etc.. Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that mannee.

## Recommended Land Pattern: [mm]

**Electrical Properties:** 


# Typical Inductance vs. Current Characteristics:

Typical Temperature Rise vs. Current Characteristics:

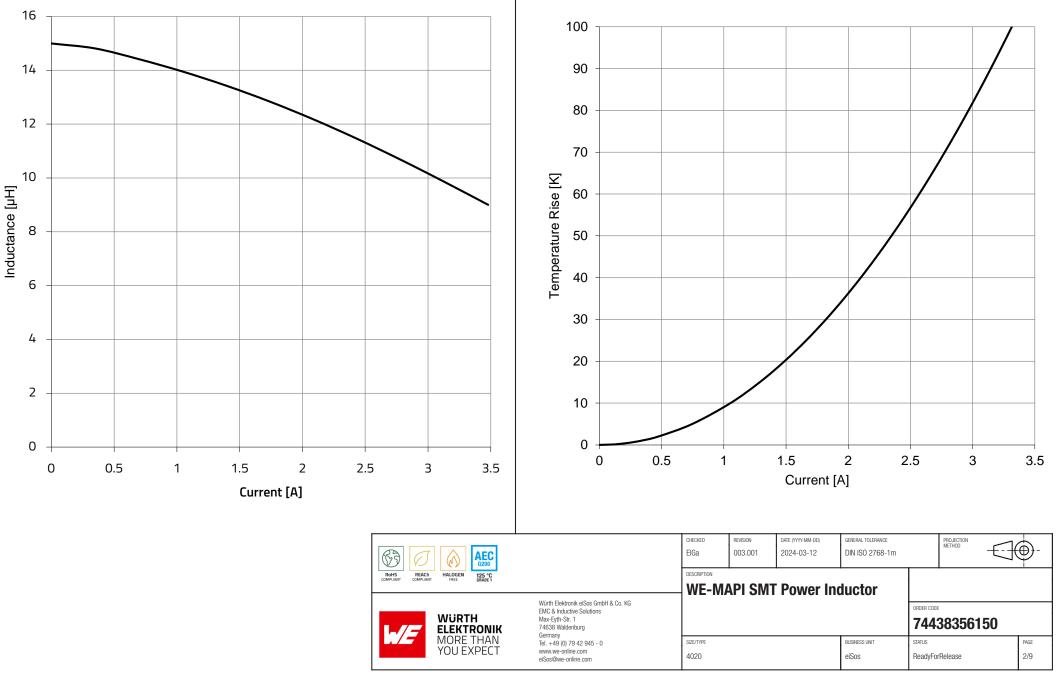

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

# **Typical Impedance Characteristics:**

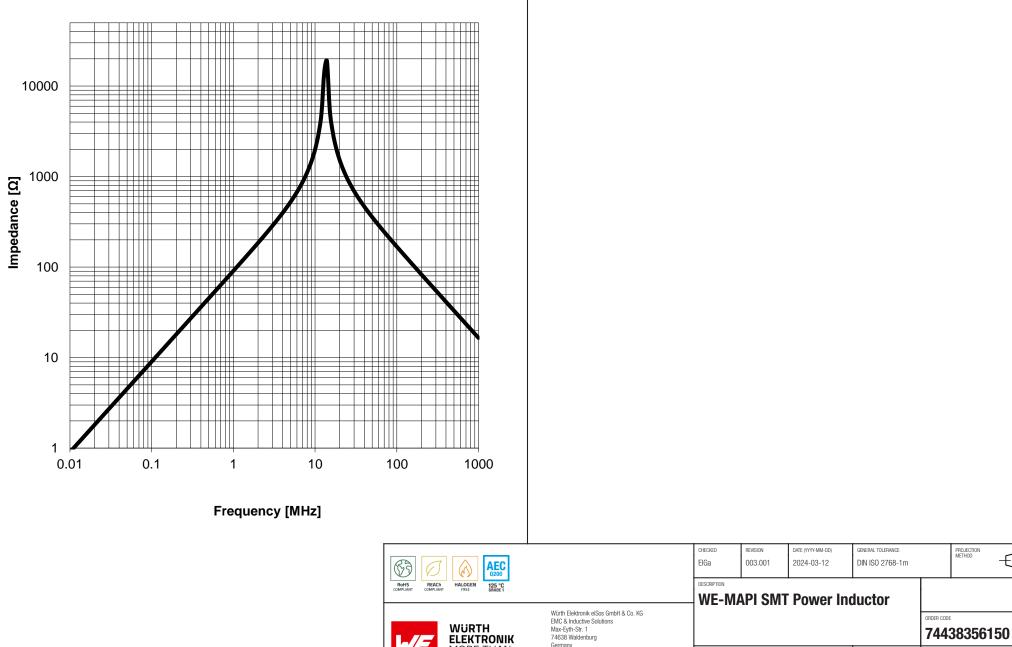

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

MORE THAN YOU EXPECT

74638 Waldenburg Germany

www.we-online.com

eiSos@we-online.com

Tel. +49 (0) 79 42 945 - 0

SIZE/TYPE

4020

 $\oplus$ 

PAGE

3/9

STATUS


ReadyForRelease

BUSINESS UNIT


eiSos

## Packaging Specification - Tape and Reel: [mm]

### Packaging Specification - Reel: [mm]

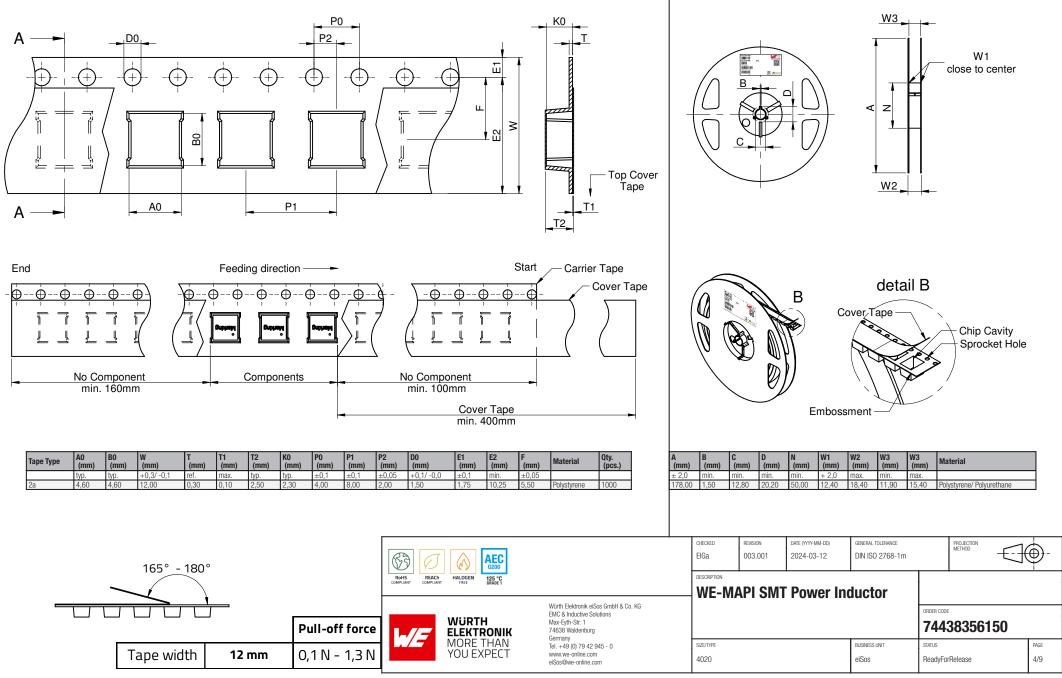

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic aircuits that that quirt high safety and reliability information.

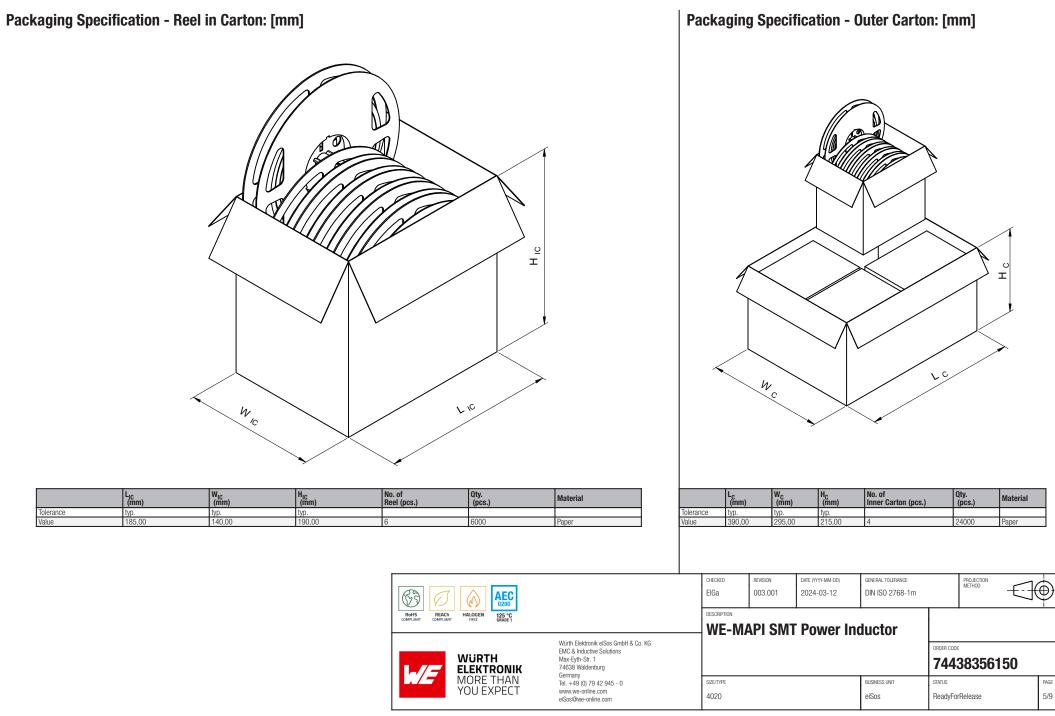

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

# **Classification Reflow Profile for SMT components:**



## **Classification Reflow Soldering Profile:**

| Profile Feature   |                    | Value                           |
|---|--------------------|---------------------------------|
| Preheat Temperature Min   | T <sub>s min</sub> | 150 °C                          |
| Preheat Temperature Max   | T <sub>s max</sub> | 200 °C                          |
| Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$                              | t <sub>s</sub>     | 60 - 120 seconds                |
| Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )  |                    | 3 °C/ second max.               |
| Liquidous TemperatureTiTime t <sub>L</sub> maintained above T <sub>L</sub> t <sub>L</sub> |                    | 217 °C                          |
|   |                    | 60 - 150 seconds                |
| Peak package body temperature   | Т <sub>р</sub>     | $T_p \le T_c$ , see Table below |
| Time within 5°C of actual peak temperature  | t p                | 20 - 30 seconds                 |
| Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )  |                    | 6 °C/ second max.               |
| Time 25°C to peak temperature   |                    | 8 minutes max.                  |

refer to IPC/ JEDEC J-STD-020E

Make sure that you use the correct thickness of solder paste to avoid an insufficient soldering result. We recommend 100µm solder paste as a reference.

# Package Classification Reflow Temperature (T<sub>c</sub>):

| Properties  | Volume mm <sup>3</sup><br><350 | Volume mm <sup>3</sup><br>350-2000 | Volume mm <sup>3</sup><br>>2000 |
|---|--------------------------------|------------------------------------|---------------------------------|
| PB-Free Assembly I Package Thickness<br>< 1.6 mm        | 260 °C                         | 260 °C                             | 260 °C                          |
| PB-Free Assembly   Package Thickness<br>1.6 mm - 2.5 mm | 260 °C                         | 250 °C                             | 245 °C                          |
| PB-Free Assembly I Package Thickness > 2.5 mm           | 250 °C                         | 245 °C                             | 245 °C                          |

refer to IPC/ JEDEC J-STD-020E

|                                  |   | CHECKED<br>EIGa            | REVISION<br>003.001 | DATE (YYYY-MM-DD)<br>2024-03-12 | general tolerance<br>DIN ISO 2768-1m |                    | PROJECTION<br>METHOD |    | €-          |
|----------------------------------|---|----------------------------|---------------------|---------------------------------|--------------------------------------|--------------------|----------------------|----|-------------|
| COMPLIANT COMPLIANT FREE GRADE'S |   | WE-MAPI SMT Power Inductor |                     |                                 |                                      |                    |                      |    |             |
|                                  | RONIK 74638 Waldenburg  |                            |                     |                                 |                                      | ORDER CODE         | 383561               | 50 |             |
| MORE THAN<br>YOU EXPECT          | eichnar<br>Tel. +49 (0) 79 42 945 - 0<br>www.we-online.com<br>eiSos@we-online.com | size/type<br>4020          |                     |                                 | BUSINESS UNIT<br>eiSos               | status<br>ReadyFor | Release              | 1  | page<br>6/9 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

## **Further information**

#### **Component Libraries:**

- 3D\_WE-IndMAPI\_SSMC-4020\_3D
- Altium WE-MAPI (24a)

Downloads\_CADENCE\_WE-MAPI (24a)

Cadstar\_WE-MAPI (20a)

Eagle\_WE-MAPI (24a)

Download\_IGS\_WE-MAPI\_4020

PSpice\_WE-MAPI (24a)

Download\_STP\_WE-MAPI\_4020

Spectre\_WE-MAPI (23a)

#### **Design Kits:**

Design Kit WE-MAPI SMT Power Inductor - Size 4020, 4030

#### Free Sample Order:

Order free samples of this article directly here!

#### **Tutorials:**

- Details about WE-MAPI (PDF)
- Single Coil Inductors (PDF)

#### **REDEXPERT:**

Calculate losses for 74438356150 in REDEXPERT

|                         |   | CHECKED<br>EIGa   | REVISION<br>003.001 | DATE (YYYY-MM-DD)<br>2024-03-12 | GENERAL TOLERANCE<br>DIN ISO 2768-1m |                    | PROJECTION<br>METHOD | $-\bigcirc$ | <b>)</b> -  |
|-------------------------|---|-------------------|---------------------|---------------------------------|--------------------------------------|--------------------|----------------------|-------------|-------------|
|                         |   |                   | API SMT             | Power Ind                       | ductor                               |                    |                      |             |             |
|                         | Würth Elektronik elSos GmbH & Co. KG<br>EMC & Inductive Solutions<br>Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany |                   |                     |                                 |                                      | ORDER CODE         | 883561               | 50          |             |
| MORE THAN<br>YOU EXPECT | Tel 49 (0) 79 42 945 - 0<br>www.we-online.com<br>elSos@we-online.com  | SIZE/TYPE<br>4020 |                     |                                 | BUSINESS UNIT<br>eiSos               | status<br>ReadyFor | Release              |             | page<br>7/9 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on use in equipment. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability intended on user and reliability intended about the intent of such usage before the design-in stage. In addition, sufficient reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and re

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-MAPI of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

- This electronic component was designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not guarantee any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The customer is responsible for the functionality of their own products. All technical specifications for standard products also apply to customer specific products.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- To improve the solderability of bottom termination components please refer to appnote ANP036 on our homepage.
- Make sure that you use the correct thickness of solder paste to avoid an insufficient soldering result. We recommend 100µm solder
  paste as a reference.

#### **Cleaning and Washing:**

• Washing agents used during the production to clean the customer application may damage or change the characteristics of the wire insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

#### Potting:

If the product is potted in the costumer application, the potting material may shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components. We recommend a
manual inspection after potting to avoid these effects.

#### **Storage Conditions:**

- A storage of Würth Electronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- · Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals may result in audible noise due to the magnetostrictive material properties.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

|  |   |                       | CHECKED   | REVISION<br>003.001 | DATE (YYYY-MM+DD)<br>2024-03-12 | general tolerance<br>DIN ISO 2768-1m |                        | PROJECTION<br>METHOD | $\bigcirc$ | € |             |
|--|---|-----------------------|---|---------------------|---------------------------------|--------------------------------------|------------------------|----------------------|------------|---|-------------|
|  | ROHS REACH HALOGEN 125 °C<br>COMPLIANT COMPLIANT FREE BRADE 1 |                       | WE-MAPI SMT Power Inductor  |                     |                                 |                                      |                        |                      |            |   |             |
|  | E   | VÜRTH<br>LEKTRONIK    | Würth Elektronik eiSos GmbH & Co. KG<br>EMC & Inductive Solutions<br>Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany |                     |                                 |                                      |                        | ORDER CODE           | 3835615    | 0 |             |
|  |   | ORE THAN<br>OU EXPECT | einany<br>Tel. +49 (0) 79 42 945 - 0<br>www.we-online.com<br>elSos@we-online.com                                    | size/type<br>4020   |                                 |                                      | BUSINESS UNIT<br>eiSos | status<br>ReadyForl  | Release    |   | page<br>8/9 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

|  |   |                         | CHECKED<br>EIGa  | REVISION<br>003.001        | DATE (YYYY-MM-DD)<br>2024-03-12 | GENERAL TOLERANCE<br>DIN ISO 2768-1m |                        |                      | <b>)</b> - |             |
|--|---|-------------------------|--|----------------------------|---------------------------------|--------------------------------------|------------------------|----------------------|------------|-------------|
|  | COMPLIANT COMPLIANT FREE GRADE 1  |                         |  | WE-MAPI SMT Power Inductor |                                 |                                      |                        |                      |            |             |
|  | WÜRTH Elektronik elSos GmbH & Co. KG<br>EMC & Inductive Solutions<br>Max-Eyth-Str. 1<br>74633 Waldenburg<br>Germany |                         | EMC & Inductive Solutions<br>Max-Eyth-Str. 1                           |                            |                                 |                                      |                        | ORDER CODE<br>7443   | 8356150    |             |
|  | ./-   | MORE THAN<br>YOU EXPECT | Tel. +44 (0) 79 42 945 - 0<br>www.we-online.com<br>eiSos@we-online.com | SIZE/TYPE<br>4020          |                                 |                                      | BUSINESS UNIT<br>eiSos | status<br>ReadyForRe | elease     | PAGE<br>9/9 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.