DIGITAL ISOLATORS

Carpov Pascual – Field Application Engineer

DIGITAL ISOLATORS

Contents

- Technology
- Applications
- WE Portfolio
- WE Advantages
- Demo

** Some presentation images have clickable web links*

TECHNOLOGY OVERVIEW

Digital Isolator

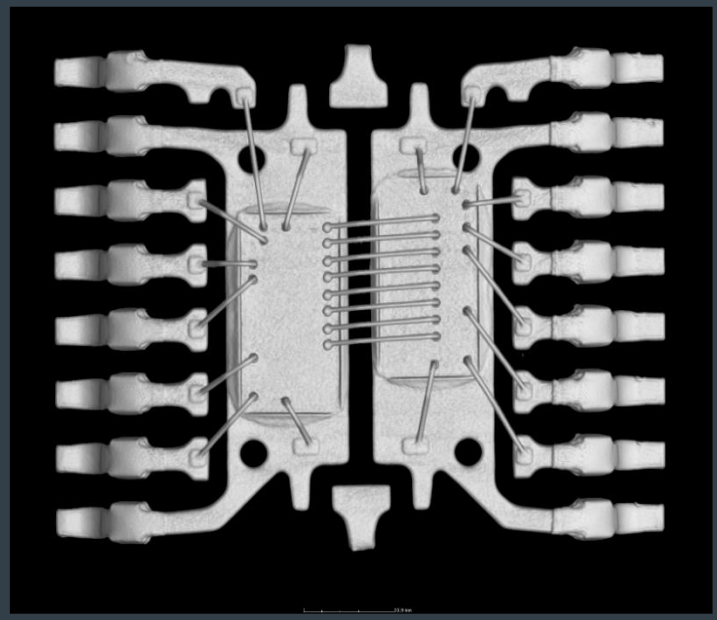

REDEXPERT®

INTRODUCTION

Use-case

Example scenario 1:
In large or complex CAN networks, different nodes - individual electronic devices or modules connected to the bus that communicate with each other - may **have varying ground potentials**. If these nodes share a direct electrical ground, **ground loops** can form, causing **unwanted currents** that **interfere** with communication and lead to **data corruption**.

Example scenario 2:
In environments with motors, inverters, or other high-power electronics, electromagnetic interference (EMI) can disrupt RS-485 signals. It can also experience **voltage spikes** caused by **power fluctuations** in industrial environments, **lightning strikes**, or **switching of large electrical loads**. Although it uses differential signaling, this alone may not be sufficient under extreme conditions and long distance wired communication. **Surges** can **disrupt** communication, **damage** sensitive electronic components, and lead to **system failures**.

INTRODUCTION

Why we need isolation?

- **Two major challenges in electronics environment.**
  - Interference-free data communication.
  - Personnel and product safety.

- **Galvanic isolation** – used to separate electrical zones with different potentials, no direct conduction path.
  - Goal is transferring signal without unwanted current flowing between two circuits.
  - Prevents electric shocks for end users especially with different ground references.

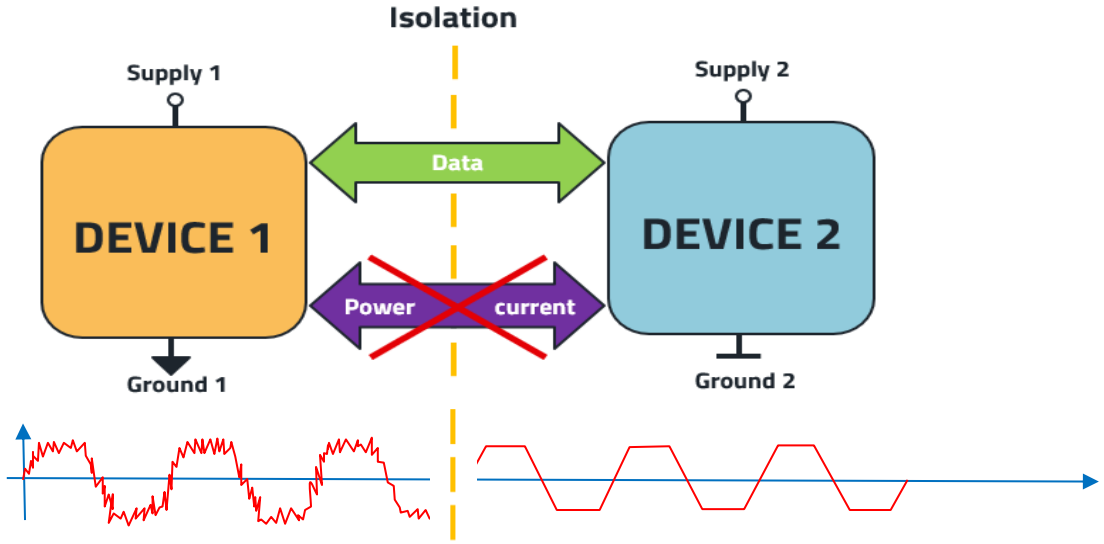

DIGITAL ISOLATOR

Why we need isolation?

Digital isolators perform the essential function of **electrically isolating circuits** while **ensuring the smooth transfer of data** between different parts of the system.

Security / Safety

- You need a galvanic isolation for safety (electrical shock, overvoltage)
- Devices operated from mains, applications with direct patient contact

Measurements

- You need a galvanic isolation for measurements (humm loops)
- Different current loops / electrical grounding
- The data must be recorded from the object in such a way that the probe does not influence the quantity being measured as precise as possible.

Electromagnetic Disturbances

You need a galvanic isolation to avoid or prevent EMC issues.

CAPACITIVE TECHNOLOGY

Design Principle

- **Primary Side / Transmitter**
  - **a) Modulator**
    - Signal transmission through the isolation barrier is realized by on/off keying (OOK) – e.g. presence of carrier signal is bit 1, without carrier signal is 0.
  - **b) Oscillator**
    - used to modulate the Schmitt-triggered input signal.

- **Secondary Side / Receiver**
  - **a) Demodulator**
    - is used to pre-amplify, filter and reconstruct the input signal.
  - **b) Buffer**
    - amplifies the signal to the required level.

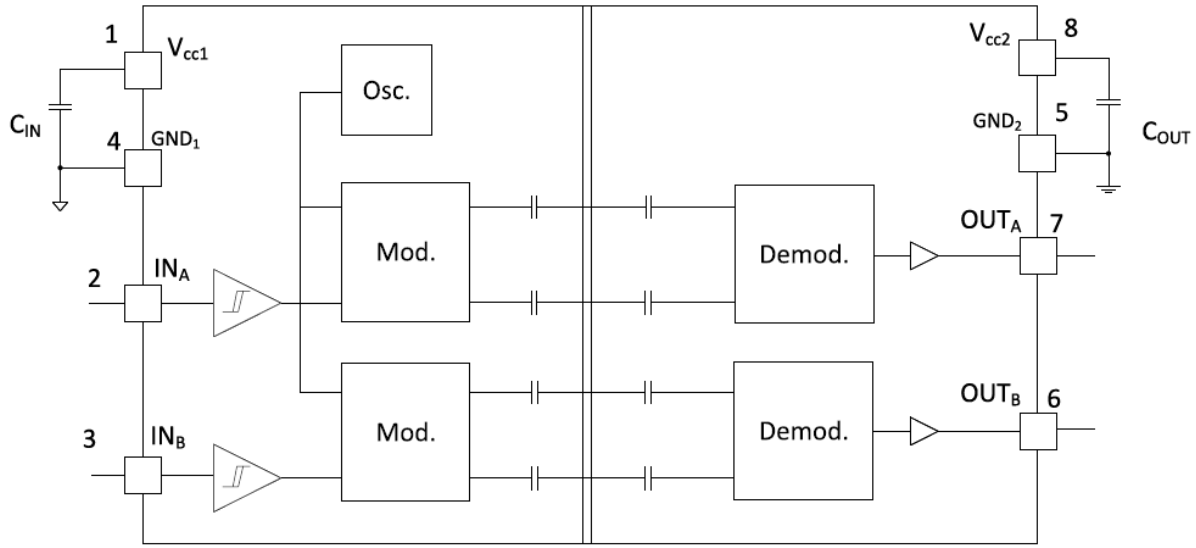

CAPACITIVE TECHNOLOGY

Construction and Features

- Manufactured using standard **CMOS** technology.
- The capacitors of the transmitter and the receiver are deposited on a **lead frame**.
- The dielectric material between the capacitor plates serves as a **galvanic isolation barrier**.
- **SiO_2** is used as the insulating material as it has much higher dielectric strength of 500 MV/m (vs. Polyimide), means that it requires **considerably less space** for the isolating gap.
- The two capacitors are **wire-bonded** in series.
- To protect the entire structure, the die and lead frame are molded using a **standard IC assembly** process.

- **Highlights**
  - Can accommodate high speed data transfer.
  - Compact design.
  - Low power consumption.
  - Low sensitivity to magnetic field and RF noise.
  - Less expensive.

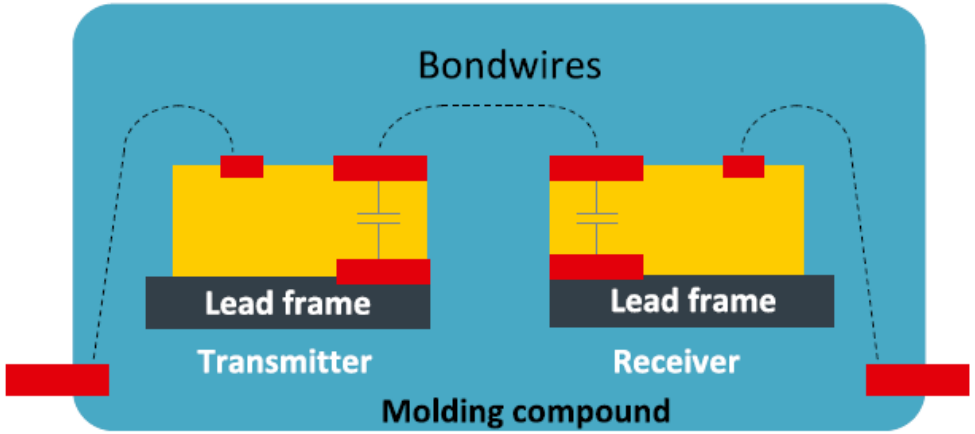

Basic structure of a capacitive digital isolator IC.

KEY PARAMETERS

Datasheet information

- **Data rate**
  - The number of bits that are conveyed or processed per second.
- **Isolation voltage**
  - Voltage level (in kV) that can be insulated for a period of time (60 seconds).
- **Surge voltage**
  - Short time sudden voltage increase can be insulated by isolator
- **Propagation delay**
  - is the time it takes for a digital signal to pass through the internal circuits and structure of a digital isolator from input to output.
- **Common Mode Transient Immunity (CMTI)**
  - is Maximum Possible Rate of Rise / Fall of the Common Mode Voltage between two isolated circuits.
- **Default output**
  - Predefined state of output pin when the input channel of isolator is unpowered.

18014x15401x
Digital Isolator
WPME-CDIS - Capacitive Digital Isolator Standard

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT

4 Channel Digital Isolator

DESCRIPTION

The CDIS 18014x15401x is a 4 channel digital isolator series that provides capacitive isolation between the primary and secondary sides of the device.

The digital isolator requires two supply voltages, one for the primary side and one for the secondary side.

The CDIS digital isolator ensures fast time to market and low development costs.

The digital isolator is available in an SOIC-16WB package (10.3 x 10.3 x 2.65)mm.

FEATURES

- Reinforced isolation: 5kV$_{RMS}$ for 60s
- Input voltage range: 2.375V to 5.5V
- Data rate up to 150Mbps
- ±150kV/µs typ. CMTI
- Available channel configurations: 4/0, 3/1 and 2/2
- Default channel output status: high or low
- Low propagation delay: 12ns typ.
- Ambient temperature range: -40°C to 125°C
- RoHS and REACh compliant
- UL1577 recognized
- DIN EN IEC 60747-17 (VDE 0884-17):2021-10 certified

TYPICAL APPLICATIONS

- Isolated communication interfaces (SPI, CAN, RS-232. RS-485)
- Motor control
- Battery management systems
- Solar inverters
- Test and measurement systems
- Programmable logic controller (PLC) interfaces

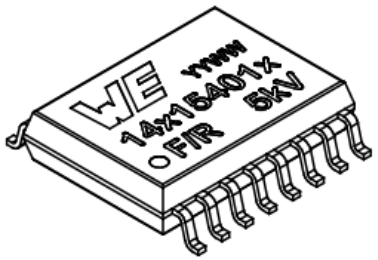

Click here for parameter details in the WE App note ANS021.

REDEXPERT®

ISOLATION SPECIFICATIONS

Safety Standards

- The primary function of digital isolators is to ensure the safety of **equipment** and **people**.
- **Isolation is required**, whenever different voltage levels can damage sensitive circuitry or injure a person.
- International safety standards **regulate the testing** of isolation voltage and many other isolation characteristics.
- **All standards** provide methods, parameters and requirements for testing.

International	Germany	US
IEC 60747-17	DIN EN IEC 60747-17 (VDE 0884-17)	UL 1577
The first international standard for digital isolators	German version of international IEC 60747-17 standard	Standard for optocouplers. Digital Isolators are allowed to be certified according to this standard

ISOLATION SPECIFICATIONS

Safety Standards

- **DIN EN IEC 60747-17 (VDE 0884-17):2021-10**
  - Maximum Working Isolation Voltage (V_{IOWM})
    - defines the maximum **continuous working** voltage that can be applied to the isolation barrier **continuously over the lifetime** of a digital isolator without degrading its functionality, which is defined as **RMS**- or DC-voltage.
  - Maximum Repetitive Peak Isolation Voltage (V_{IORM})
    - This is the maximum **repetitive peak** voltage that can be **continuously applied** to the isolation barrier **over the lifetime** of a digital isolator without reducing its functionality, which is defined as a **peak** value.
  - Maximum Transient Isolation Voltage (V_{IOTM})
    - This is the maximum peak voltage that can be applied to the isolation barrier **for 60 seconds**. The characteristic is defined as a **peak** voltage value.
  - Maximum Surge Isolation Voltage (V_{IOSM})
    - A maximum **instantaneous value** of a voltage pulse (1.2/50 µs waveform) that an isolator can tolerate, which is defined as a **peak** voltage value.

- **UL 1577**
  - Maximum withstanding isolation voltage $V_{ISO(max)}$
    - Defines the isolation barrier must withstand a certain level of **RMS AC voltage (V_{ISO}) for 60 seconds.**

18024x15401x
Digital Isolator
WPME-CDIP - Capacitive Digital Isolator Powered

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT

9 APPROVALS

Table 12: Approvals.

STANDARD	DESCRIPTION
UL 1577	UL File No: E535458
DIN EN IEC 60747-17 (VDE 0884-17):2021-10	VDE certification number: 40058069

DIN EN IEC 60747-17 (VDE 0884-17):2021-10				
V_{IORM}	Max. repetitive peak isolation voltage	AC voltage (bipolar)	1414	V_{PK}
V_{IOWM}	Max. working isolation voltage	AC voltage; Time-dependent dielectric breakdown (TDDB) test	1000	V_{RMS}
		DC voltage	1414	V_{DC}
V_{IOTM}	Max. transient isolation voltage	$V_{TEST} = V_{IOTM}$, t = 60s (qualification); $V_{TEST} = 1.2 \times V_{IOTM}$, t = 1s (100% production)	7070	V_{PK}
V_{IOSM}	Max. surge isolation voltage	Test method per IEC 60065, 1.2/50 µs waveform, $V_{TEST} = 1.6 \times V_{IOSM}$ (qualification)	7070	V_{PK}
UL1577				
$V_{ISO(max)}$	Max. withstanding isolation voltage	$V_{TEST} = V_{ISO}$, t = 60s (qualification), $V_{TEST} = 1.2 \times V_{ISO}$, t = 1s (100% production)	5000	V_{RMS}

ISOLATION SPECIFICATIONS

Additional Information

- **Clearance**
  - is the **shortest distance** through **air** between input and output terminals of an isolator.
- **Creepage**
  - is the **shortest distance** across the **surface** of the package between two conductive parts of an isolator.

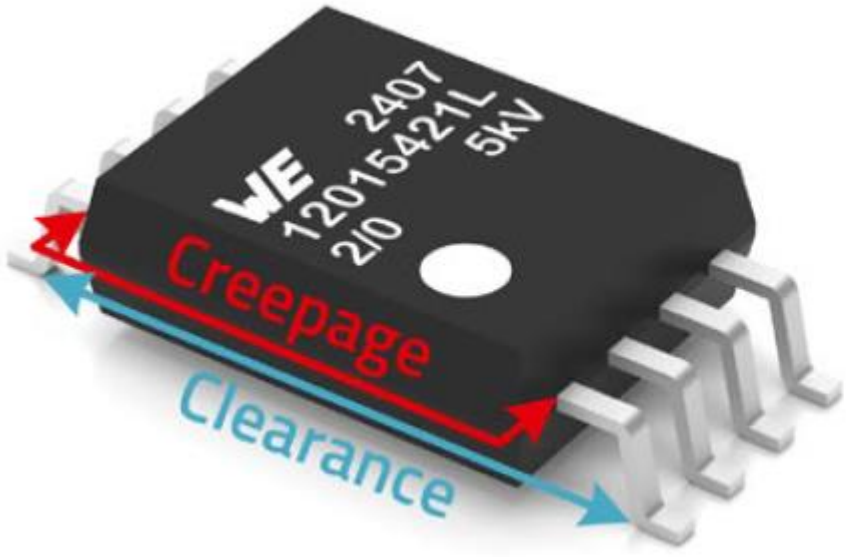

Creepage and Clearance distance is 8 mm for digital isolators in SOIC-16WB and SOIC-8WB packages. And 4 mm for isolators in SOIC-8NB package.

CHANNELS

Configurations

- **Direction**
  - No. of **Forward>>** / No. of **Reverse<<**
    - 1/1, 2/0, 2/2, 3/1, 4/0

- **Number of channels**
  - 1/1, 2/0 = **2** channels
  - 2/2, 3/1, 4/0 = **4** channels

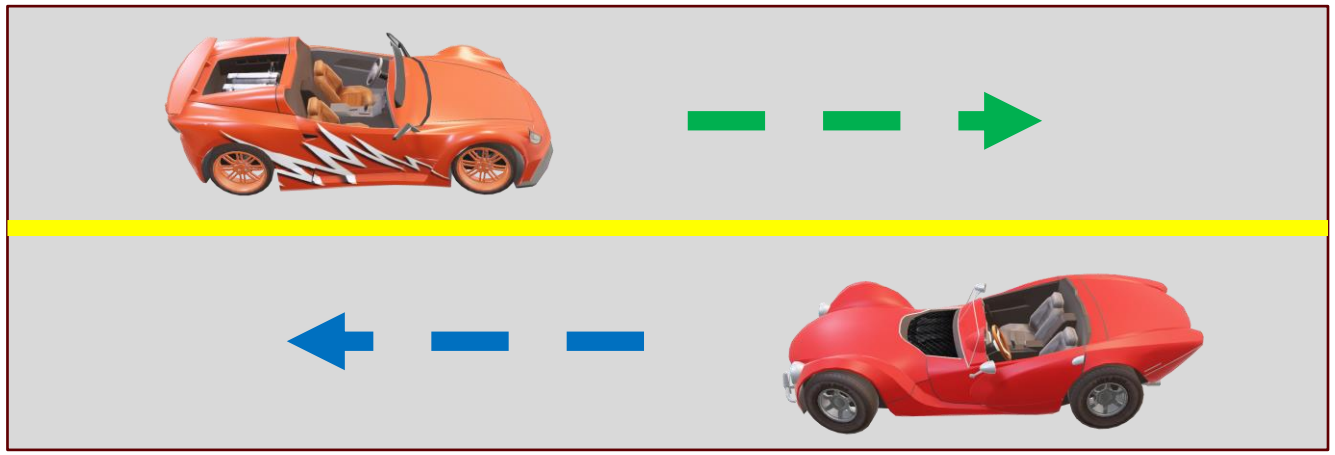

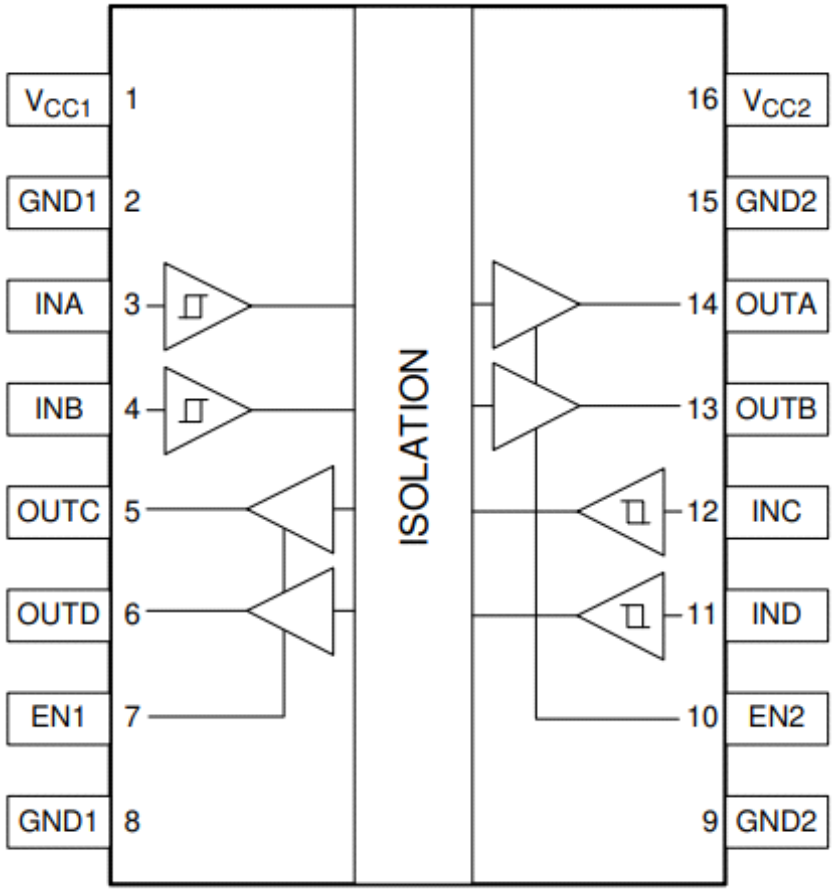

4 channels: 2/2 configuration

DEFAULT OUTPUTS

Function and Purpose

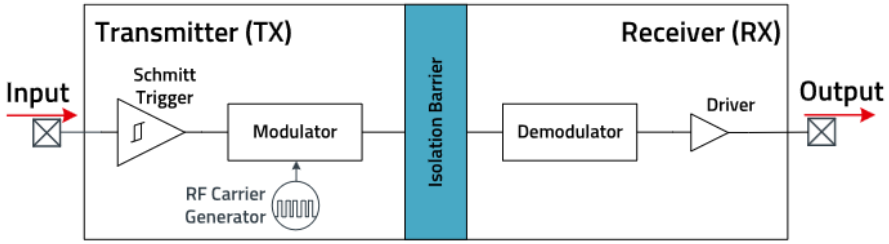

- is a **predefined state of the output signal pin** when the input side of the isolator is not powered, or the input signal pin is open/not connected.

- **Low** – The **modulator transmits high-frequency signals** through the isolation barrier only **when the input has a high signal** level. This is preferred for use in power supplies, like in SMPS, to isolate gate drivers for safety reasons.

- **High** – the **modulator transmits high-frequency signals** through the isolation barrier only **when the input has a low signal** level. Typically for communication interfaces, default high output is preferred as signal lines are defined as high logic level during idle/standby state.

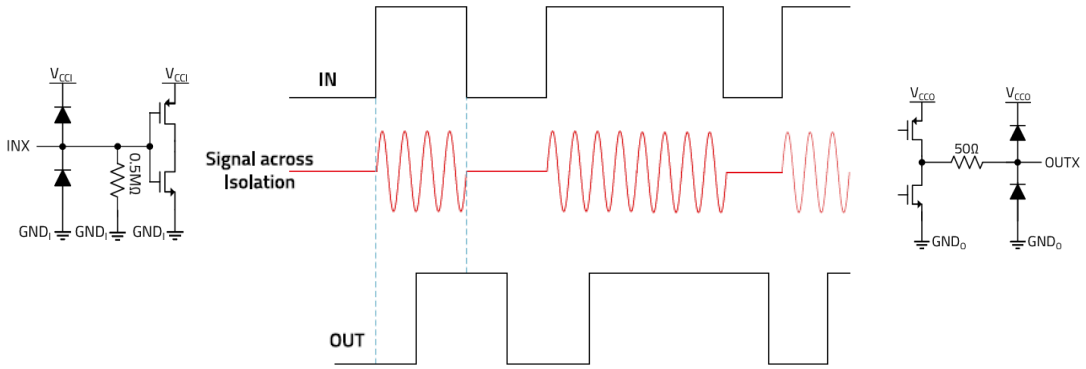

Default Low
Example: 18014015401**L**

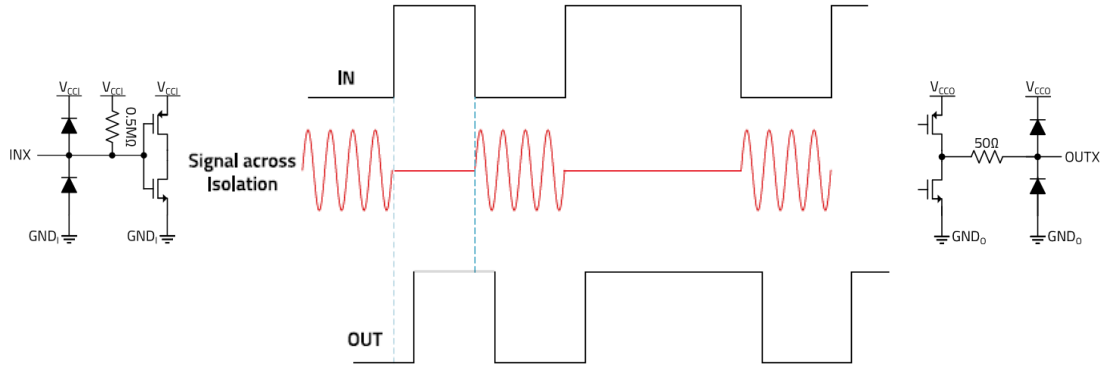

Default High
Example: 18014015401**H**

DIGITAL ISOLATORS VS. OPTOCOUPLERS



vs.

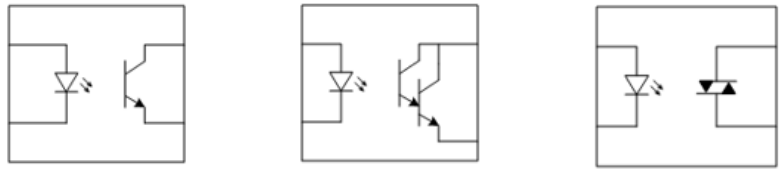

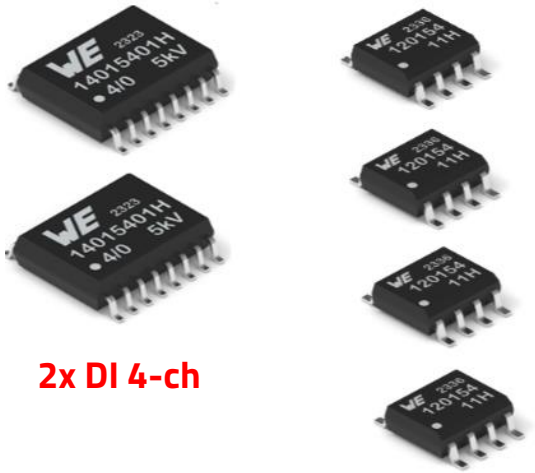

2x DI 4-ch

4x DI 2-ch

8x OC 1-ch

Digital isolator preferred

Optocoupler preferred

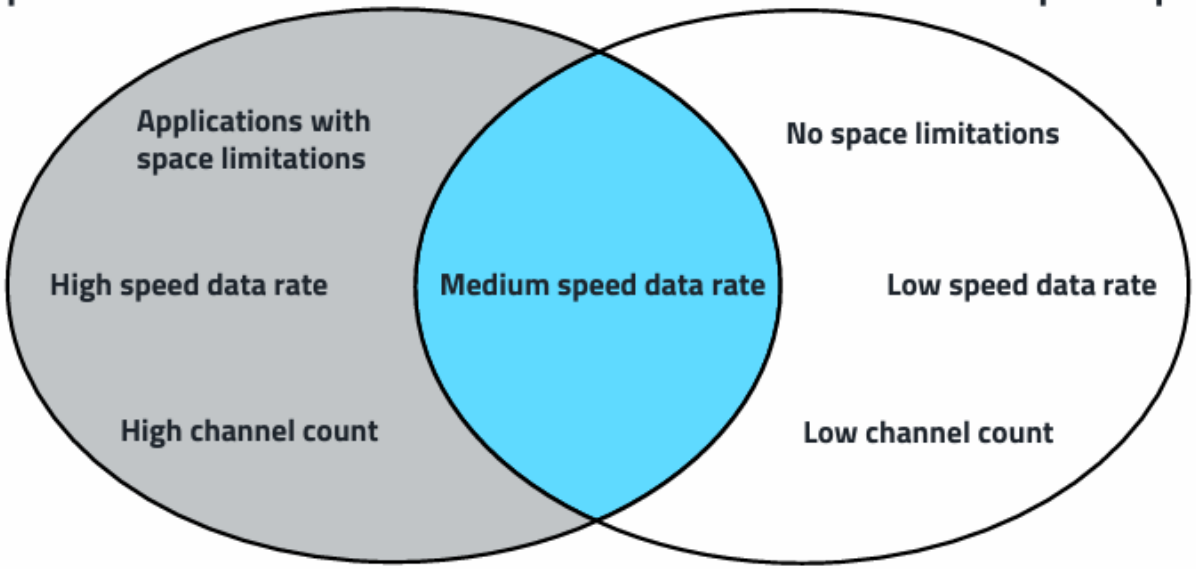

8-channel isolation requirement

REDEXPERT®

QUESTION #1

WE Digital Isolators are based on what technology?

a) Optical

b) Magnetic

c) Capacitive

d) Radioactive

APPLICATIONS

Digital Isolator

APPLICATIONS

Typical Systems

- Electricity meters, grid
- Relay protection units
- Lighting
- Motors and drivers
- Power supply
- Medical equipment
- Test and measurements, data acquisition
- Industrial field (RS-485, CAN, SPI isolation)
- Green energy

TIMING CHARACTERISTICS

Most Popular Interfaces on the Market and Maximum Data Rate

Protocol	Applications	Data Rate
RS-232	Modems, printers and PLC machines	up to 1 Mbps, but usually it is less than 500 kbps.
RS-422, RS-485	Industrial automation, smart meters, HVAC (Heating, Ventilation and Air Conditioning) systems, motor drives and tools	up to 10 Mbps
CAN	Industrial automation, automotive, transportation electronics, industrial control systems, building automation and HVAC systems.	up to 1 Mbps
CAN Flexible Data-Rate		in the range of 5 to 8 Mbps
I2C	Simple and low speed DAC/ADC, LCD or OLED displays, various types of sensors	up to 5 Mbps
SPI	Fast interface for communication between controllers, sensors and memory modules	up to 50 Mbps

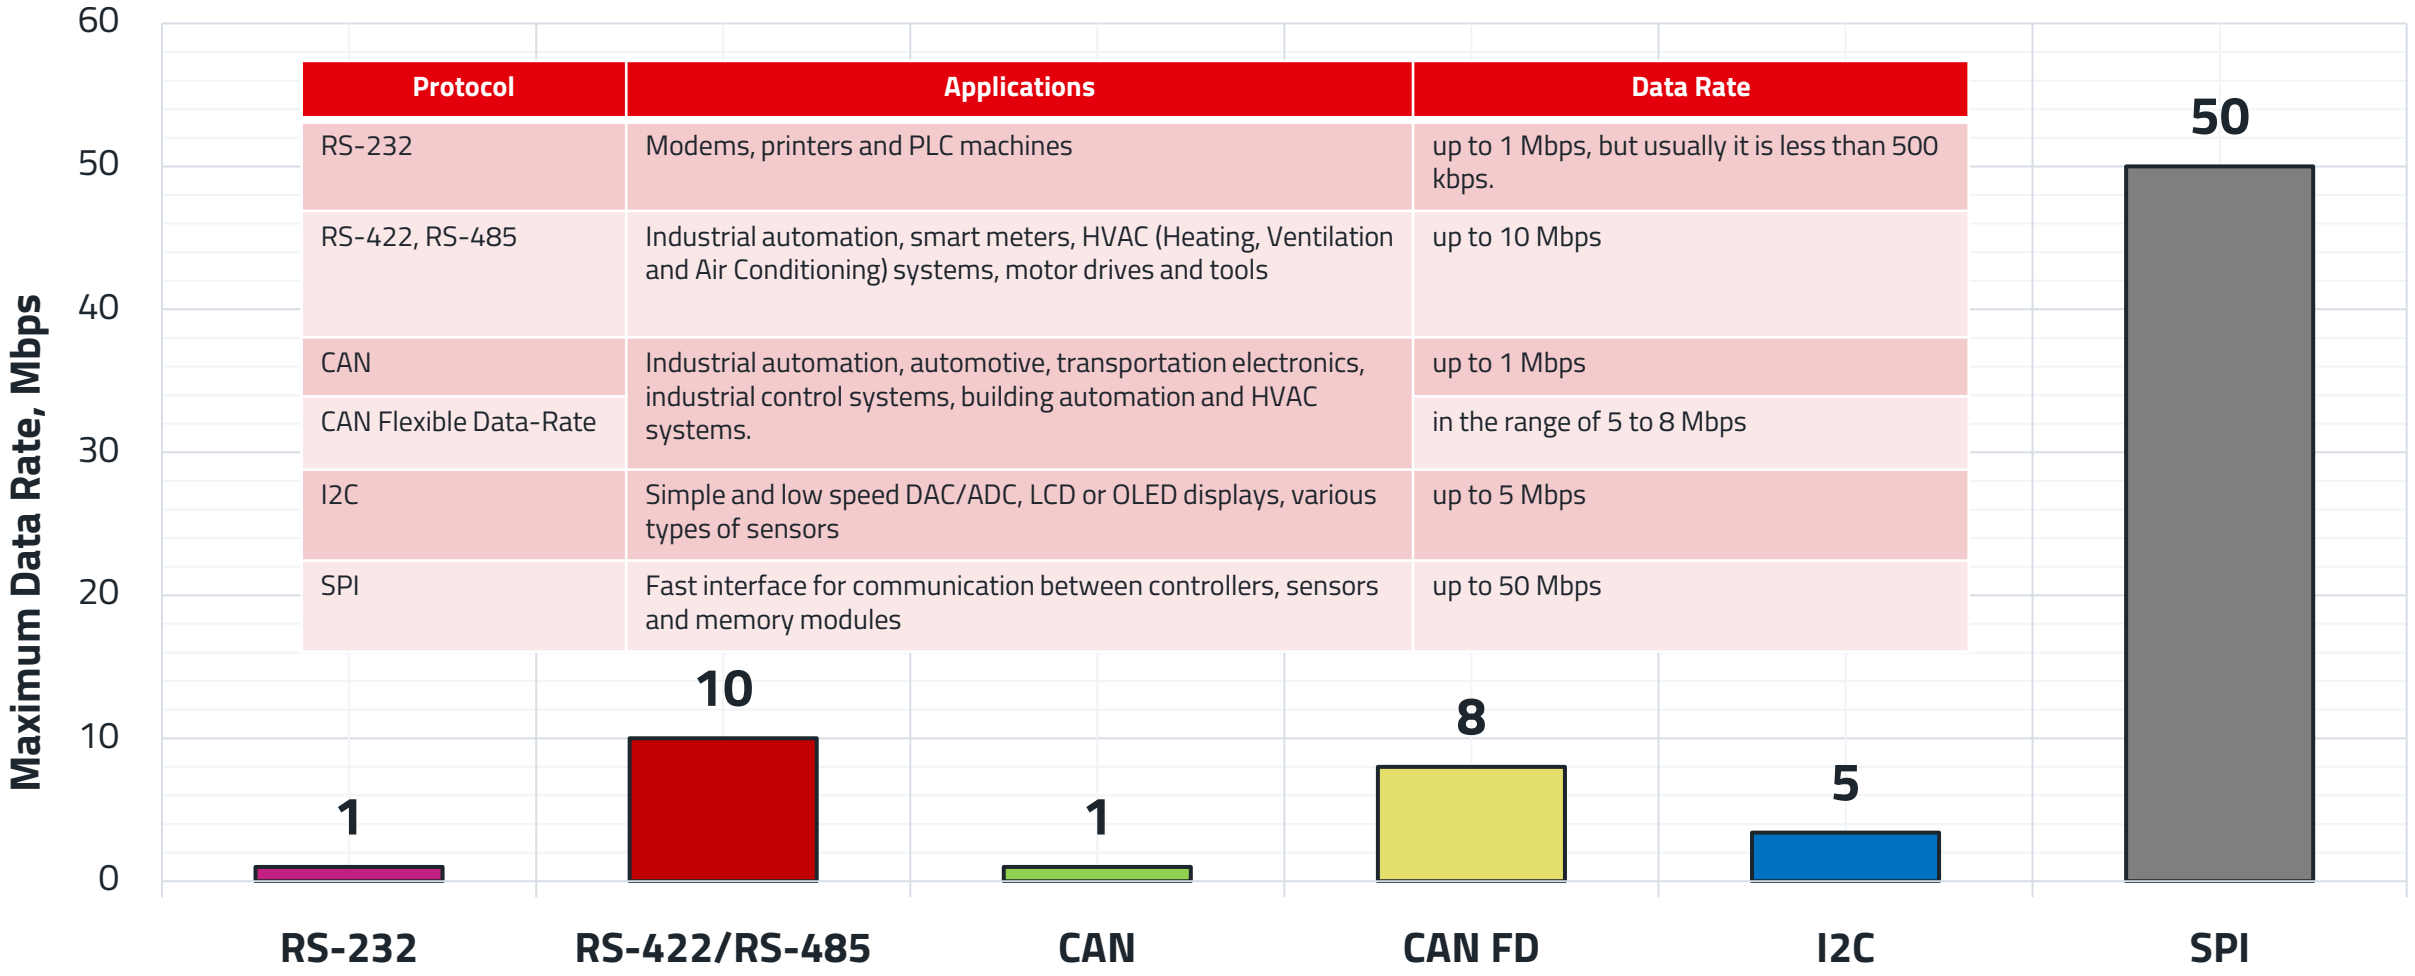

MARKET TREND

Variants

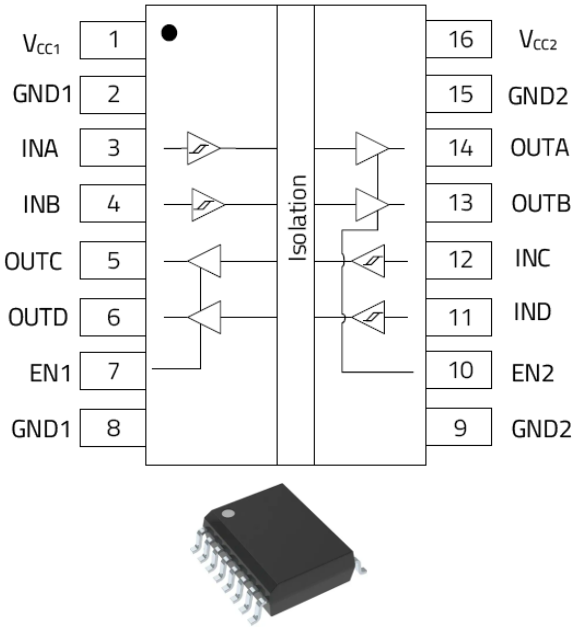

Digital Isolators

Isolation Voltage
2500V/3000V/3750V/5000V/5700V

Number of channels
1 ch/2 ch/3 ch/4 ch/5 ch/6 ch

Channels Configuration
4/0, 3/1, 2/2, 1/3, 0/4 (example for 4 ch DI)

Data Rate
1 Mbps - 150 Mbps

Package
SO-8 NB, SO-16 WB, SO-8 WB, SO-16 NB

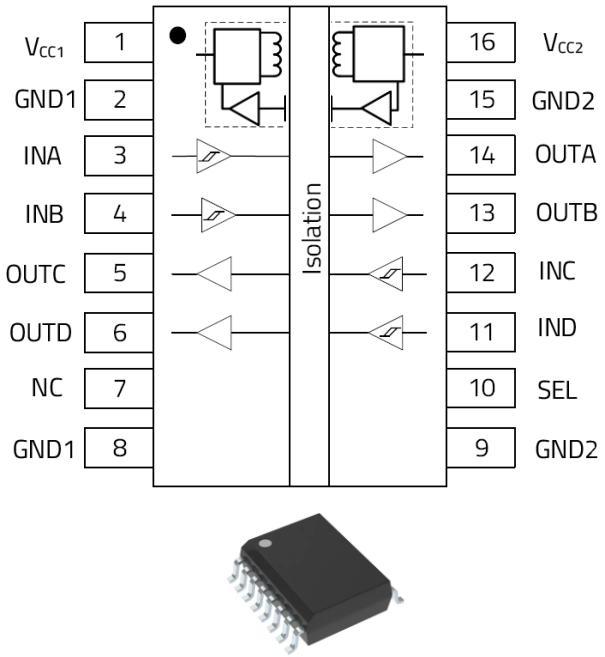

Without integrated DC/DC converter

- Low price
- More flexible solution
- The most common on the market

With integrated DC/DC converter

- Less space on PCB
- Easier to use
- DC/DC compliance to EMC standards

SAMPLE APPLICATION

SPI and ADC

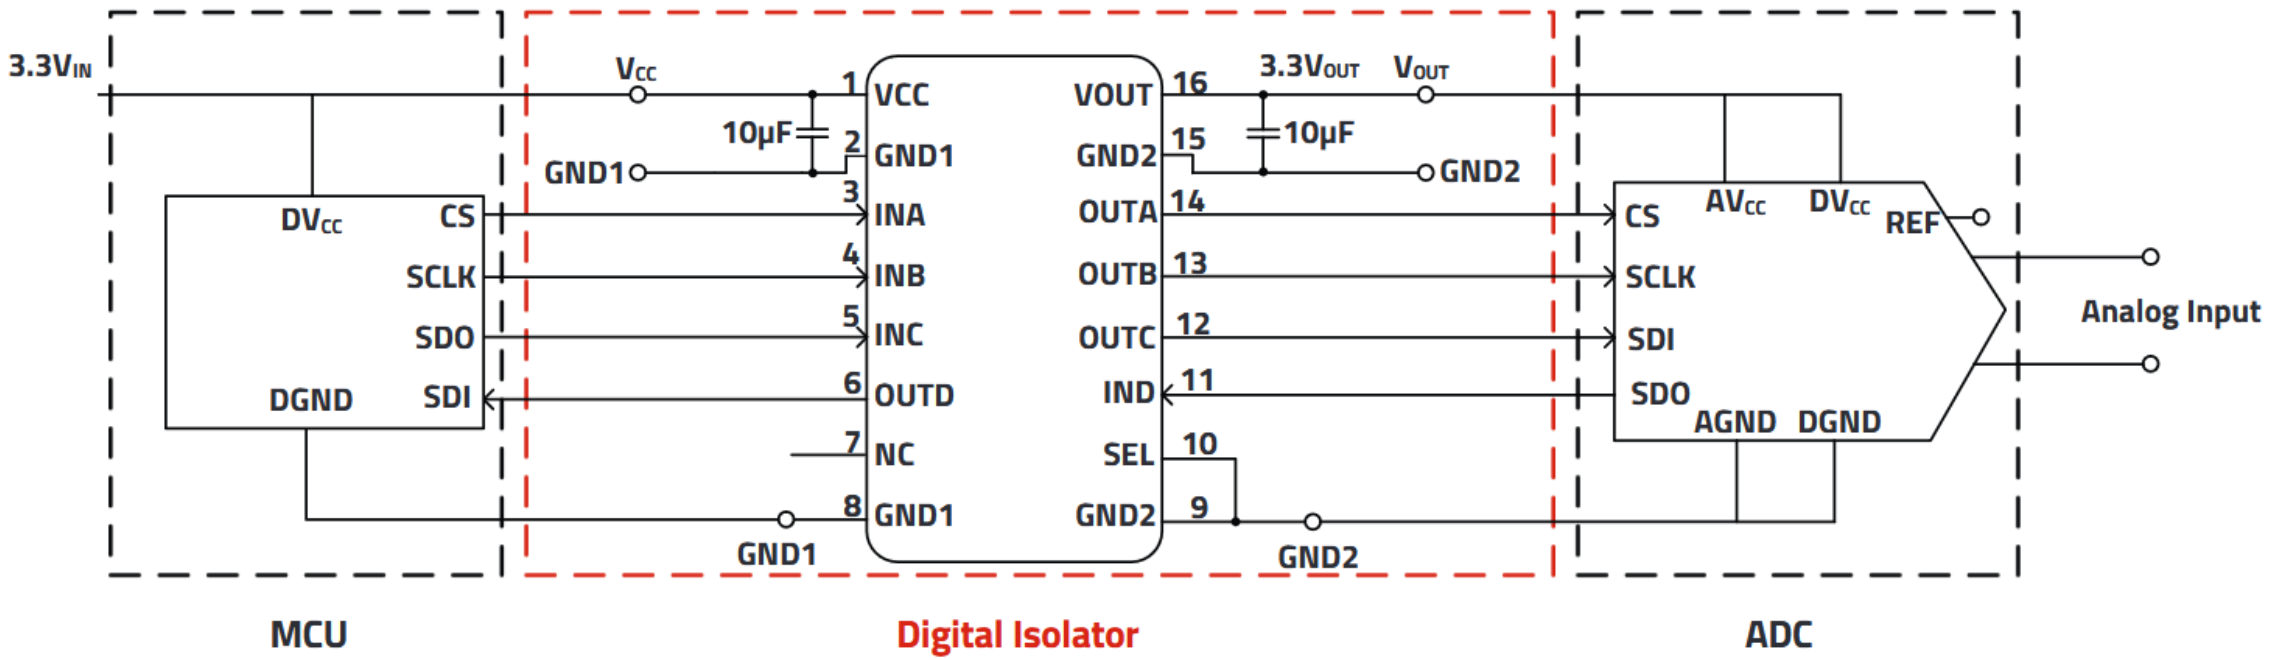

Recommended part number: 18024115401H (SOIC-16WB)

SAMPLE APPLICATION

Controlled Area Network (CAN)

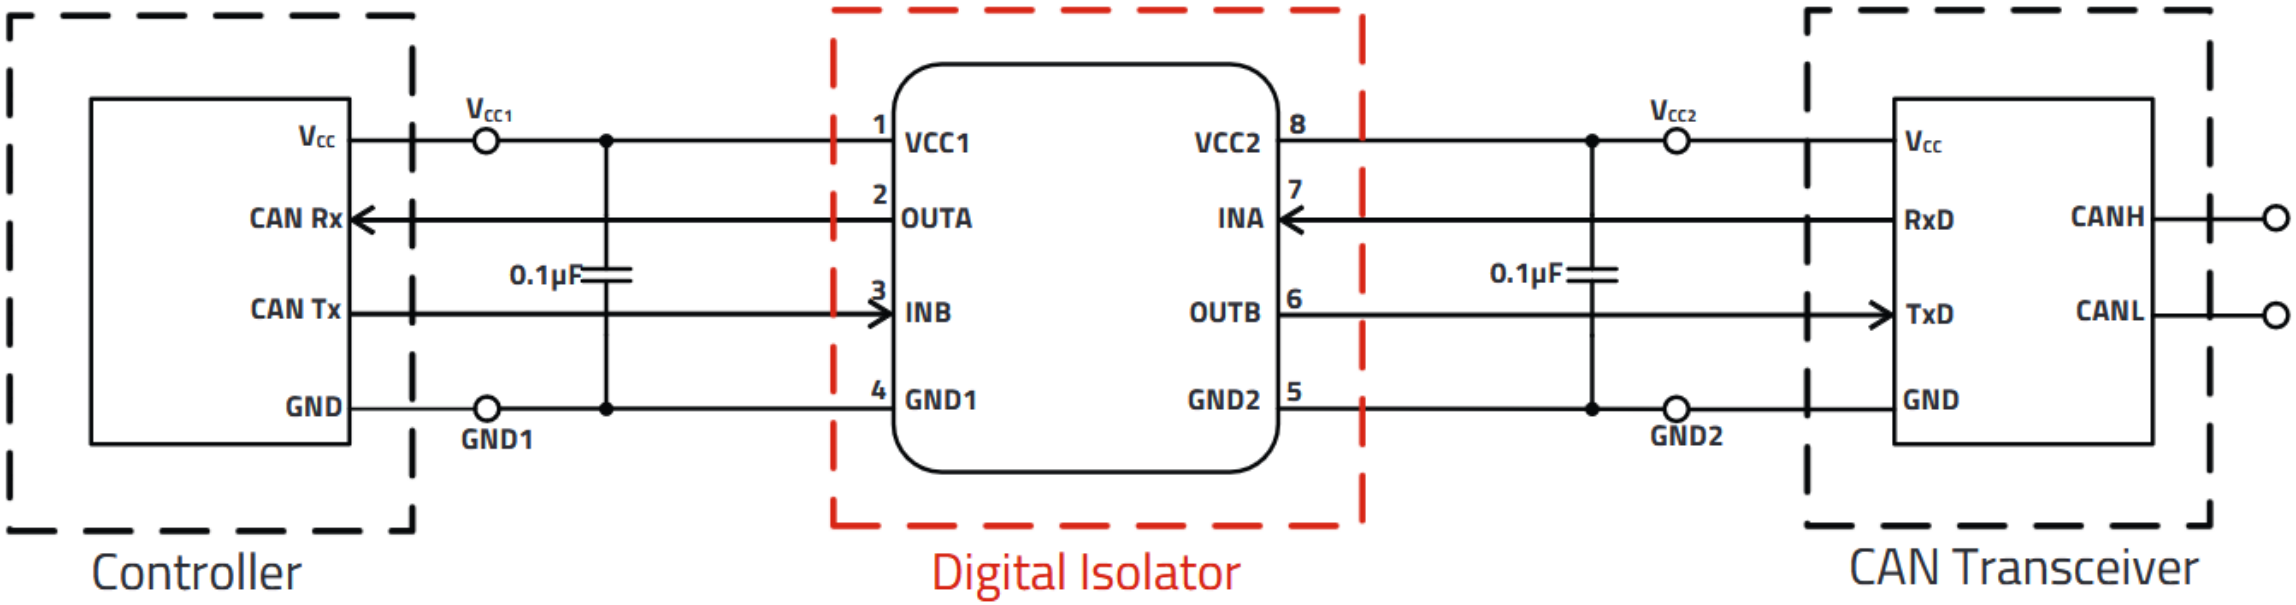

Recommended part numbers: 18012115411H (SOIC-8NB) or 18012115421H (SOIC-8WB)

SAMPLE APPLICATION

RS-232

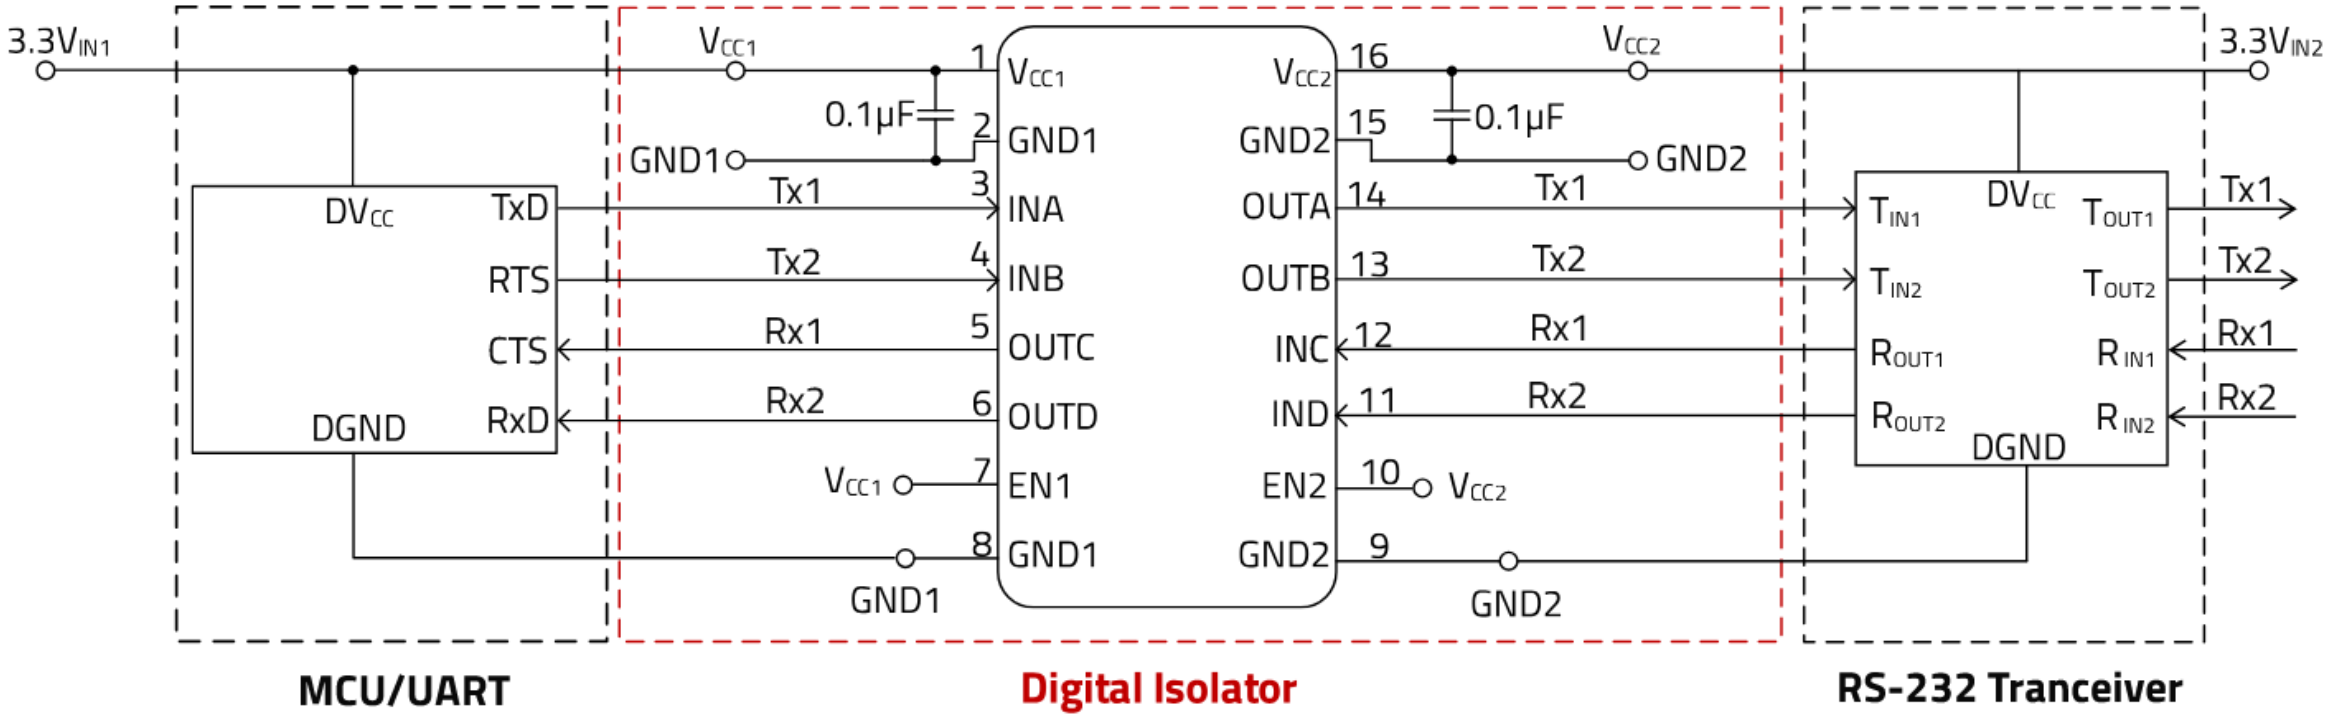

Recommended part number(s): 18014215401H

SAMPLE APPLICATION

Gate Drivers

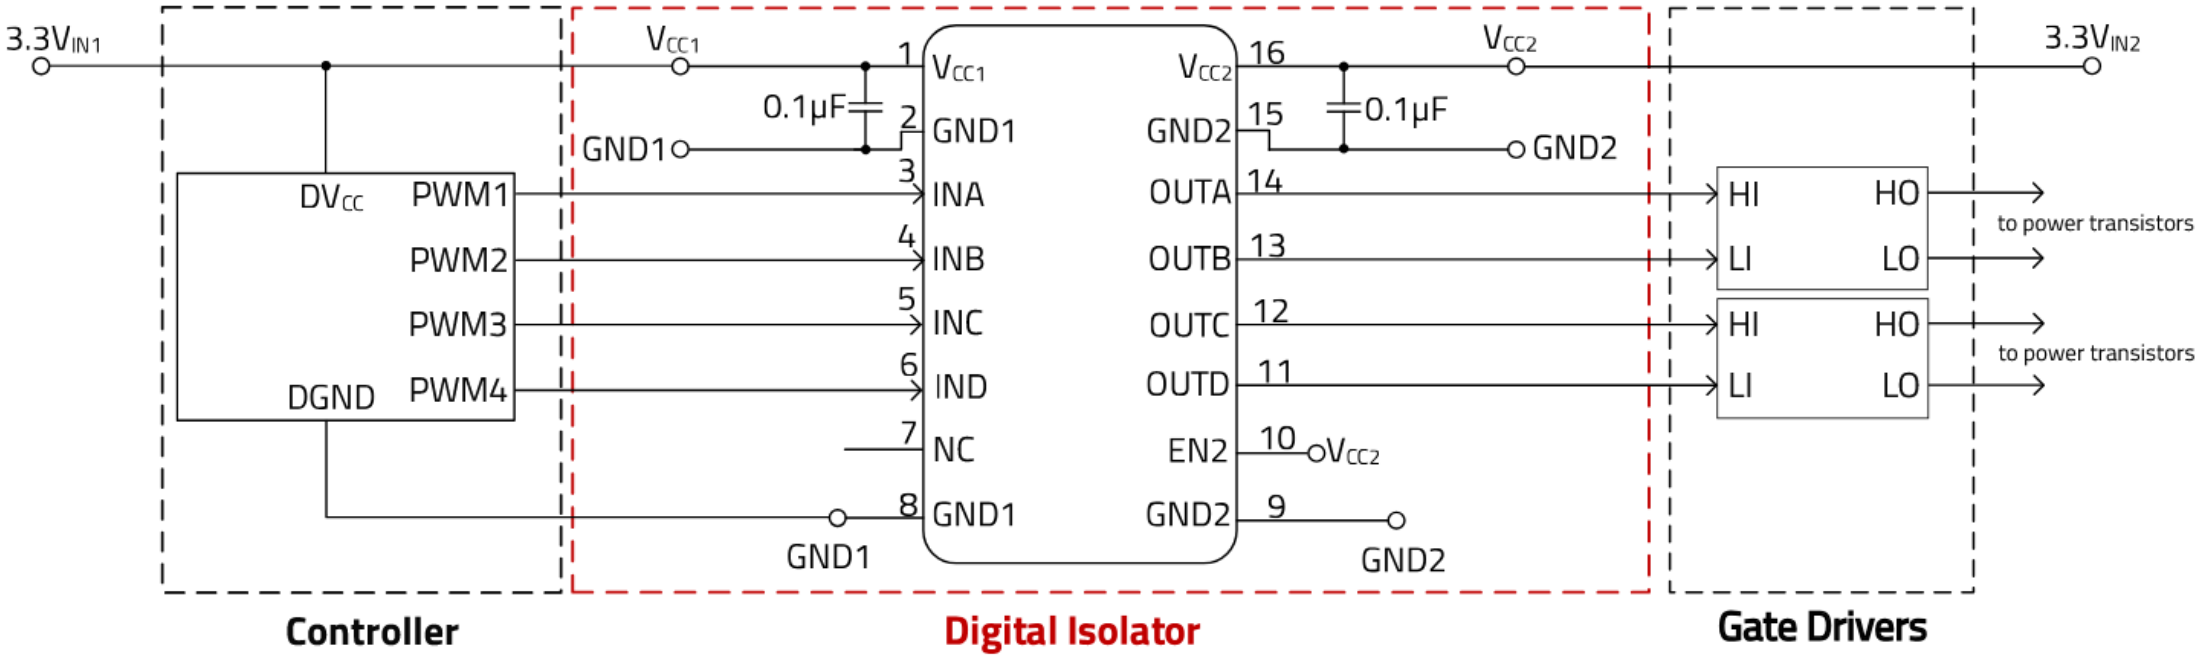

Recommended part number(s): 18012015421L, 18014015401L

SAMPLE APPLICATION

Isolation of SPI and CAN Interfaces for Industrial Automation

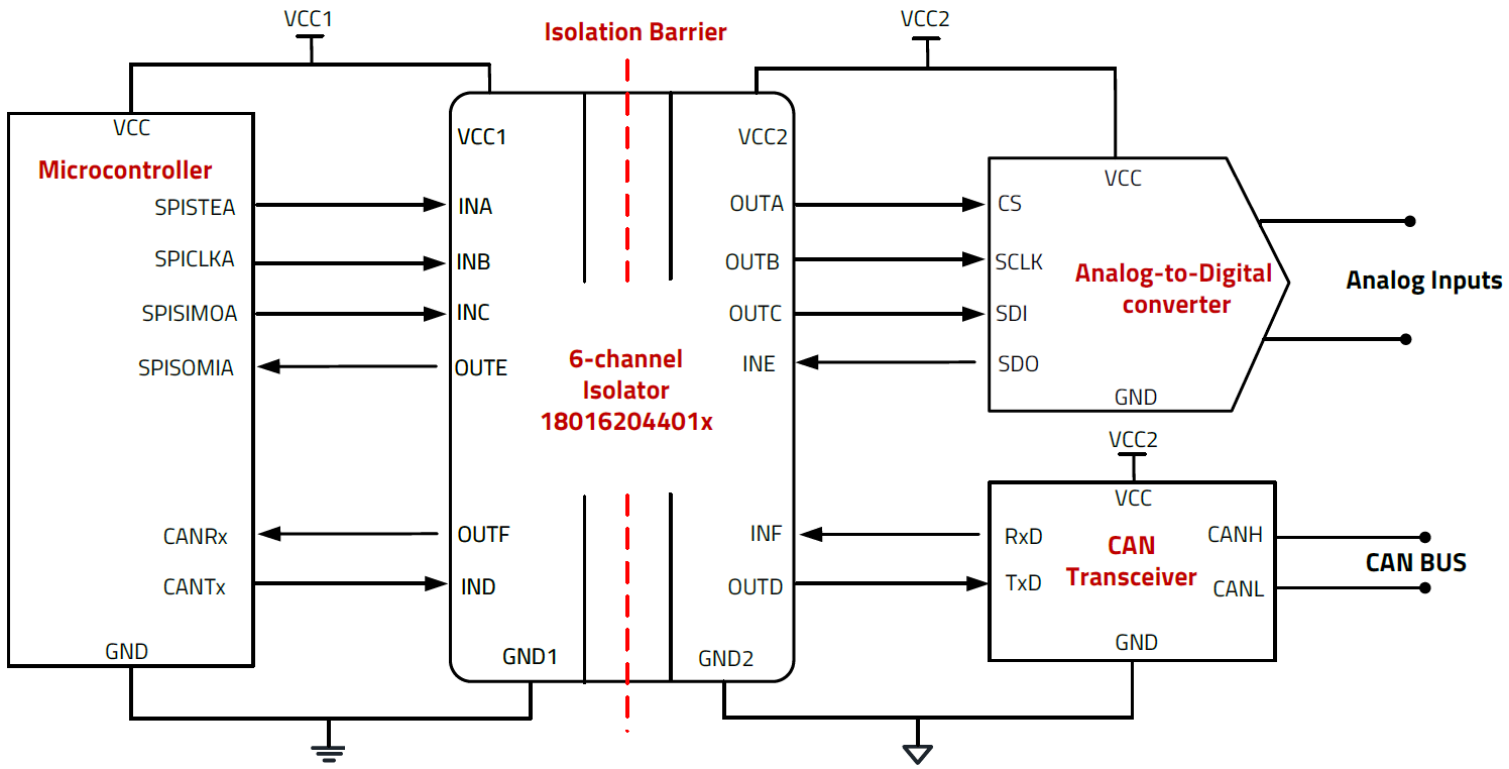

Benefits of 6-Channel Digital Isolators:

- Supports complex systems with multiple interfaces (e.g., SPI + CAN)
- Saves board space in compact designs
- Lowers BOM cost and simplifies inventory
- Improves signal integrity with fewer interconnects
- Simplifies assembly and testing

PCB DESIGN

Stitching Capacitance



- This is an approach **to utilize the parasitic capacitance between PCB layers** – as an integrated **Y-capacitor.** This technique creates a high-frequency return path for common-mode noise, **helping to reduce EMI without the need for additional components.**

- Example: a 4-layer PCB structure. The stitching capacitance is **formed by overlapping copper areas across different PCB layers** - specifically between internal layer 1, internal layer 2 and the bottom layer.

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.010mm	SM-001	Solder Mask	GTS
CF-004	**TOP**	**0.035mm**		**Signal**	**GTL**
Prepreg		*0.070mm*	*PP-010*	*Dielectric*	
Prepreg		*0.070mm*	*PP-010*	*Dielectric*	
Copper	**IN1**	**0.035mm**		**Signal**	**G1**
		1.200mm	*FR-4*	*Dielectric*	
Copper	**IN2**	**0.035mm**		**Signal**	**G2**
Prepreg		*0.070mm*	*PP-010*	*Dielectric*	
Prepreg		*0.070mm*	*PP-010*	*Dielectric*	
CF-004	**BOTTOM**	**0.035mm**		**Signal**	**GBL**
Surface Material	Bottom Solder	0.010mm	SM-001	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.640mm

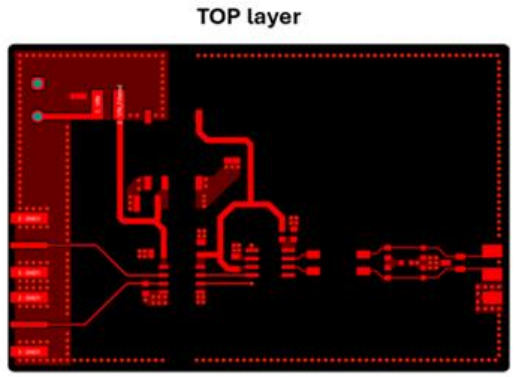

$$C = \frac{\varepsilon_0 \cdot \varepsilon_r \cdot A}{d}$$

C is the stitching capacitance in farads (F)

ε_0 is the vacuum permittivity, approximately 8.854 · 10−12 F/m

ε_r is the relative dielectric constant of the PCB material (typically 4-5, as provided by the manufacturer)

A is the overlapping area of the planes in square meters (m2)

d is the distance between the planes (dielectric thickness) in meters (m)

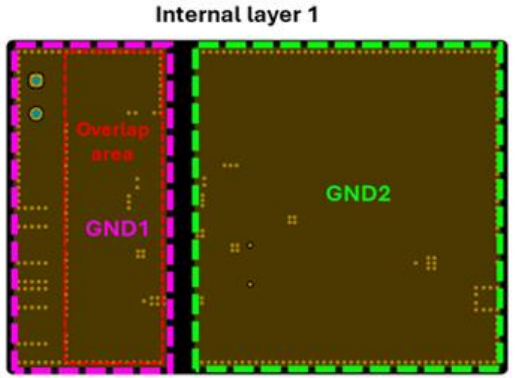

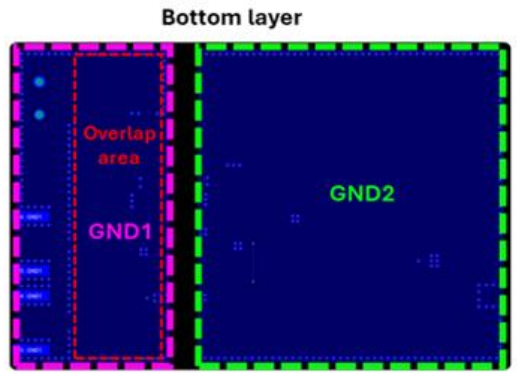

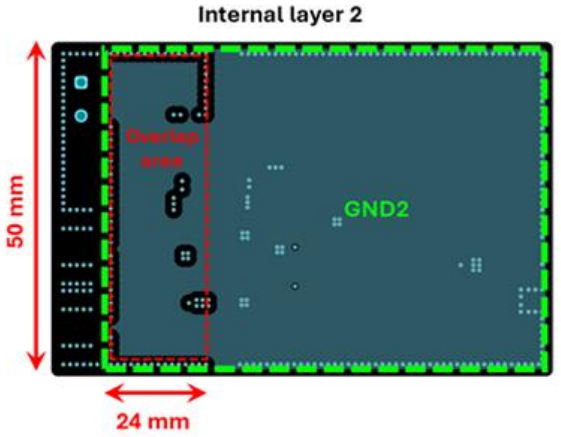

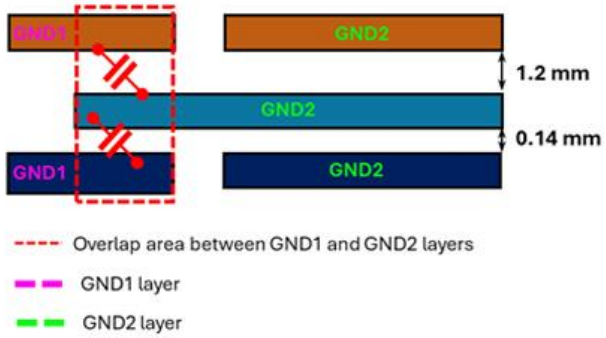

REDEXPERT®

WE PORTFOLIO

Digital Isolator

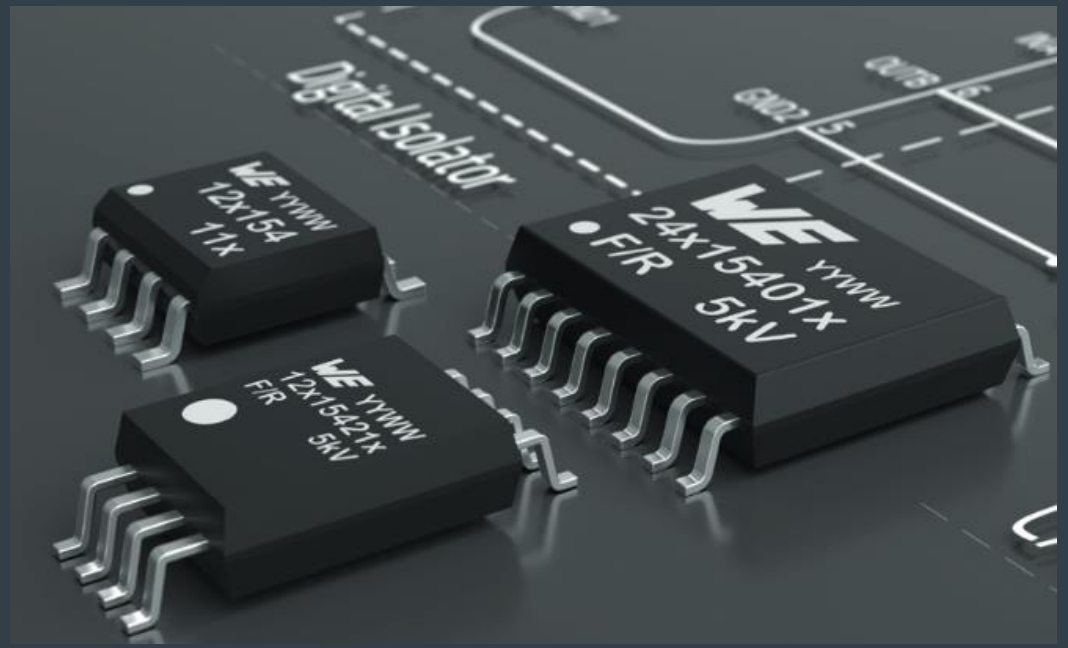

REDEXPERT®

WE PORTFOLIO

Product Overview

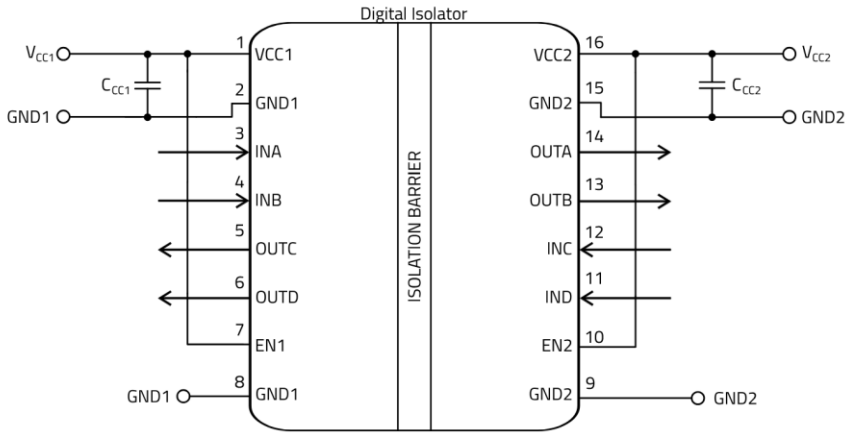

Digital Isolators

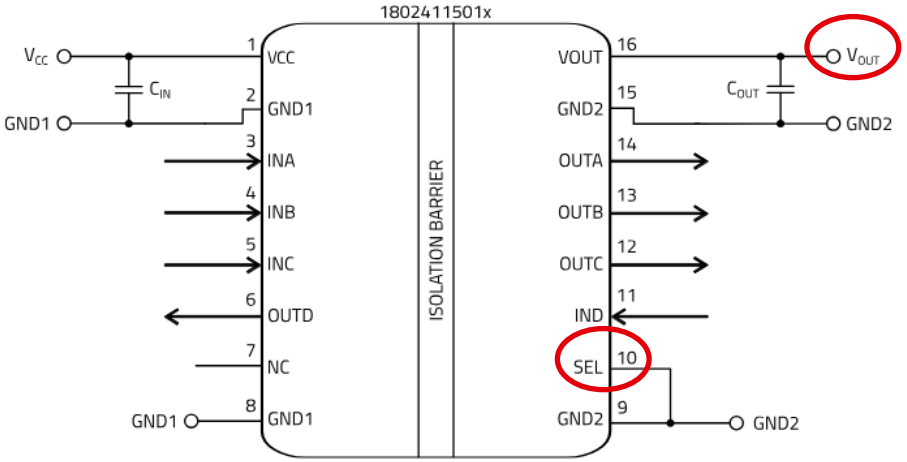

without integrated power

with integrated power

WE PORTFOLIO

2-, 4- and 6-Channel Digital Isolators **WITHOUT** Integrated DC/DC Converters

NEW

2-channel isolators

WPME-CDIS

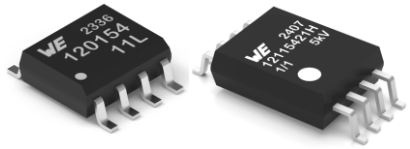



- Isolation Voltage: **3.75kVrms** & **5kVrms**
- **Basic & Reinforced isolation**
- Channels configuration: **2/0** and **1/1**
- Default output: **High** and **Low**
- Data Rate: **150 Mbps**
- Supply Voltage: **2.375V to 5.5V**
- CMTI: **±150kV/µs**
- Propagation Delay (typ.): **12ns**
- Package: **SOIC-8NB** and **SOIC-8WB**

4-channel isolators

WPME-CDIS

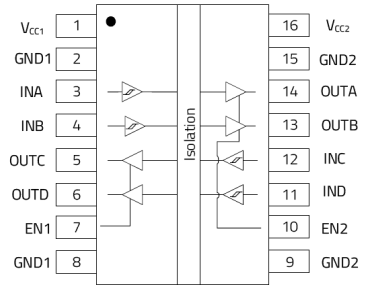

- Isolation Voltage: **5000Vrms** for 60s
- **Reinforced isolation**
- Channels configuration: **4/0, 3/1, 2/2**
- Default output **High** and **Low**
- Data Rate: **150 Mbps**
- Supply Voltage: **2.375V to 5.5V**
- CMTI: **±150kV/µs**
- Propagation Delay (typ.): **12ns**
- Package: **SOIC-16WB**

6-channel isolators

WPME-CDIS





- Isolation Voltage: **5000Vrms**
- **Reinforced isolation** (pending)
- Channel configuration: **6/0, 5/1, 4/2, 3/3**
- Default output: **High** and **Low**
- Data Rate: **40Mbps**
- Supply Voltage: **3V to 5.5V**
- CMTI (typ.): **±150kV/µs**
- Propagation Delay (typ.): **22ns**
- Package: **SOIC-16WB**

NEW PORTFOLIO

I²C Isolators

2-channel Bidirectional I²C Isolators

WPME-CDI2C
Capacitive Digital Isolator I²C

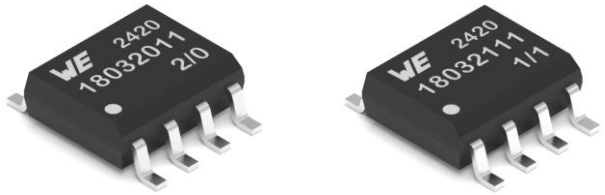

- Isolation voltage: **3750Vrms**
- **Basic isolation**
- **Without integrated DC/DC converters**
- Channel configuration: **2B/0U** and **1B/1U**
- Bidirectional data transfer: **up to 2MHz**
- Supply voltage: **3V to 5.5V**
- Ambient temperature: **-40°C to + 125°C**
- Package: **SOIC-8NB**

Part number	18032011	18032111
Functional block diagram	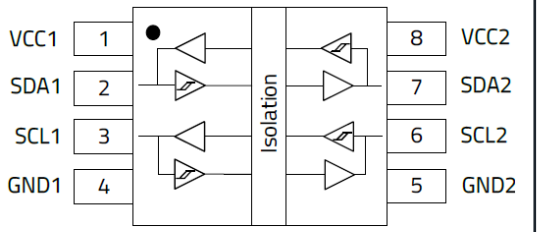	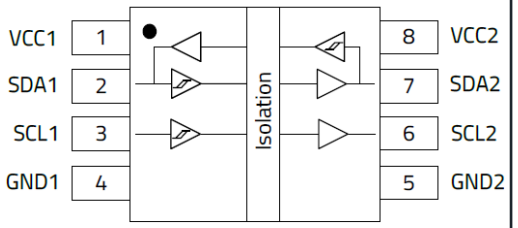
Channel configuration	2B/0U: 2 bidirectional channels 0 unidirectional channels	1B/1U: 1 bidirectional channel 1 unidirectional channel

MORE THAN YOU EXPECT

WE Protection Features

- **Soft-Start**
  - When the input and output voltages reach the UVLO rising threshold (typ. 2.75V), then the component operates.
- **Over Temperature Protection (OTP)**
  - an internal thermal shutdown circuit, which activates when the junction temperature reaches 180 °C (typ).
- **Over Current Protection (OCP) / Short Circuit Protection (SCP)**
  - The output voltage is continuously monitored and when it drops below a certain threshold, the controller stops switching.
- **Input/Output Undervoltage Lockout (UVLO)**
  - The device incorporates input and output undervoltage lockout (UVLO) to protect from unexpected behavior at input voltages below the recommended values.

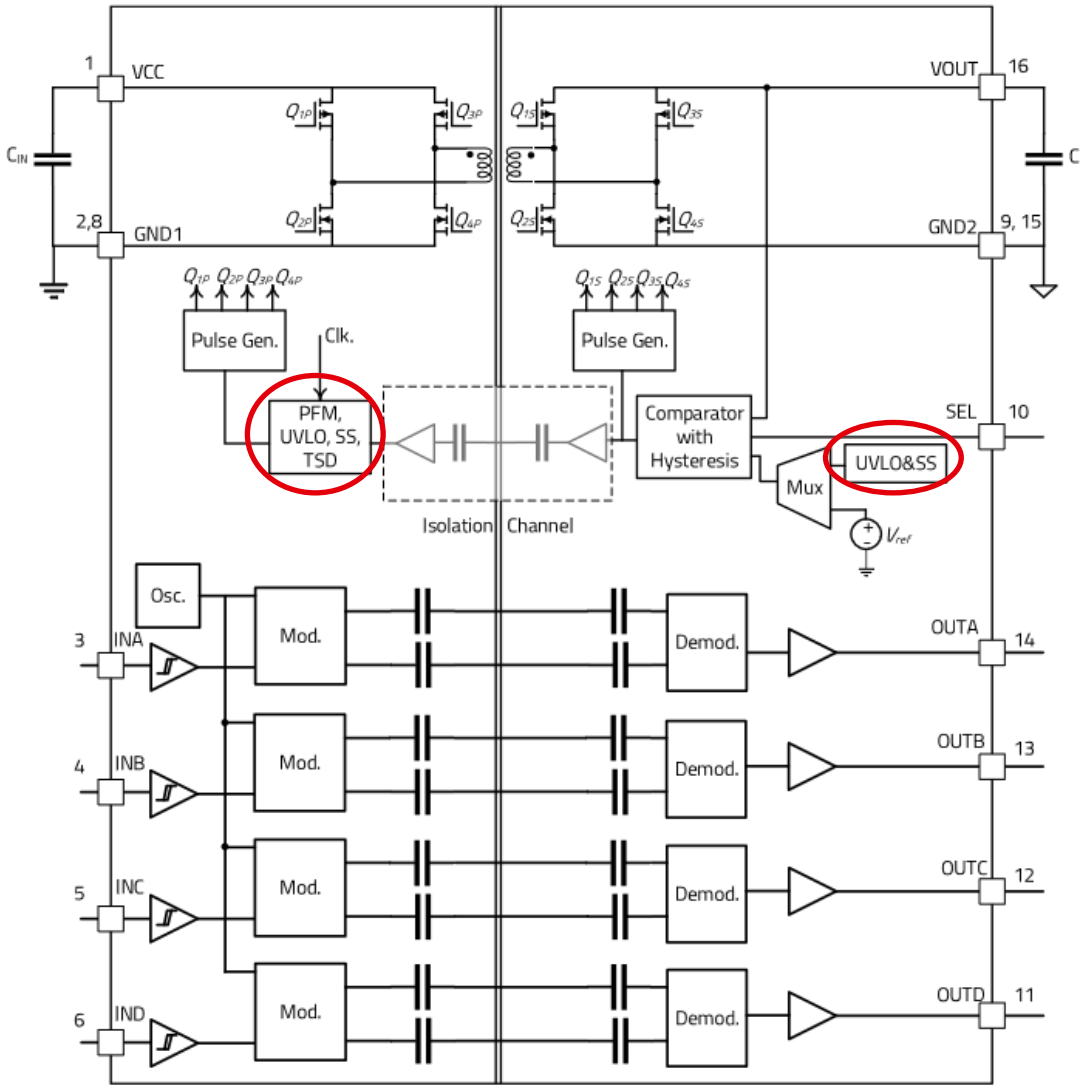

WE PORTFOLIO

Component Marking

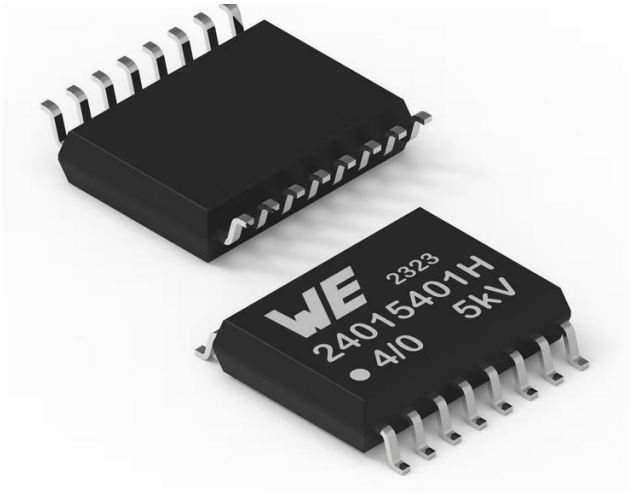

MARKING	DESCRIPTION
WE	Würth Elektronik eiSos GmbH & Co. KG
YYWW	Year and calendar week
14x15401x	Order code
F/R	Number of forward/reverse channels
5kV	5kV isolation voltage

QUESTION #2

What are the features of WE Digital Isolators?

a) Standard IC packaging sizes.

b) With and without integrated power.

c) Up to 150 Mbps data rate.

d) High or low default output.

e) UVLO, OCP, OTP, and Soft-start.

f) Approvals on safety standards.

g) All of the above.

WE SUPPORT

Digital Isolator

WE SUPPORT

Benefits

Simple Design-In
→ “Me too“ product

Competitive price, stock and forecasting



Options with and without integrated power; high and low default output state

Technical support

WE SUPPORT

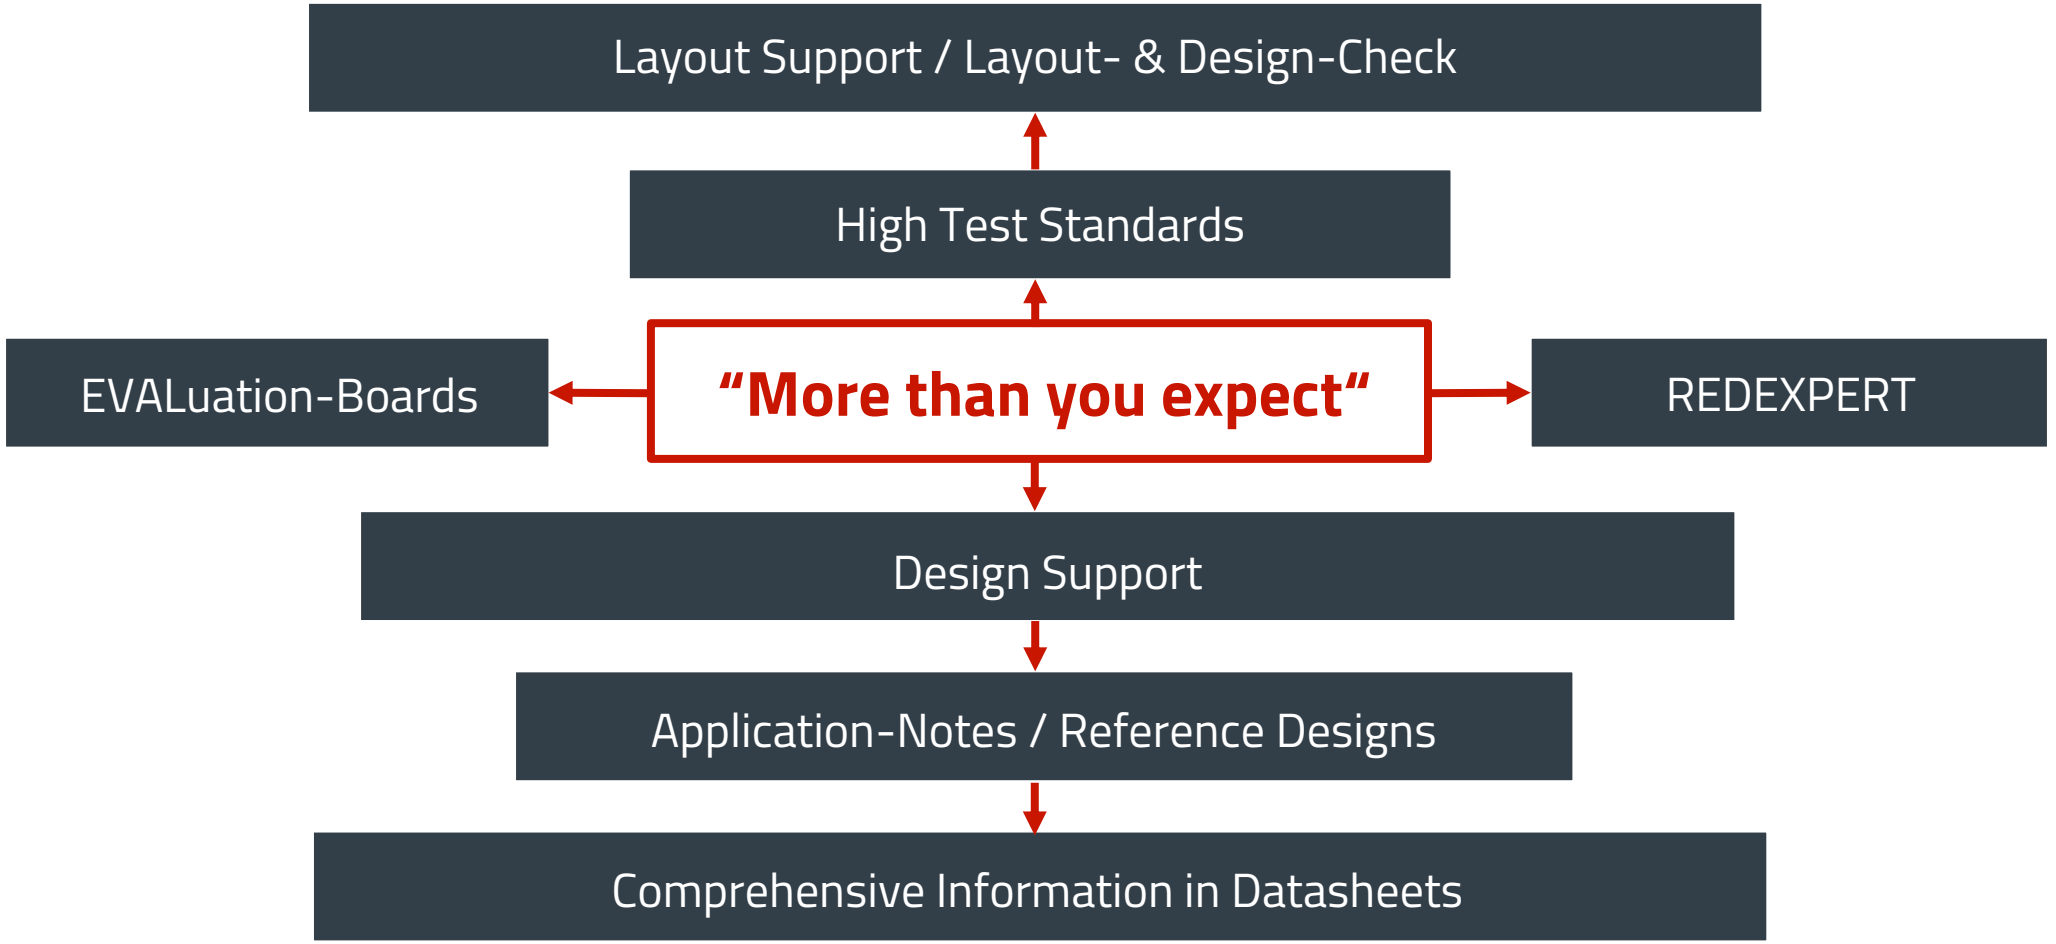
Layout Support / Layout- & Design-Check
High Test Standards
EVALuation-Boards
“More than you expect“
REDEXPERT
Design Support
Application-Notes / Reference Designs
Comprehensive Information in Datasheets

DESIGN SUPPORT

Samples / Evaluation Kits

- For customers **we provide** samples and evaluation boards.
- There is an evaluation board for **every isolator** with integrated power and bulk evaluation board without soldered isolator for unpowered Digital Isolator.

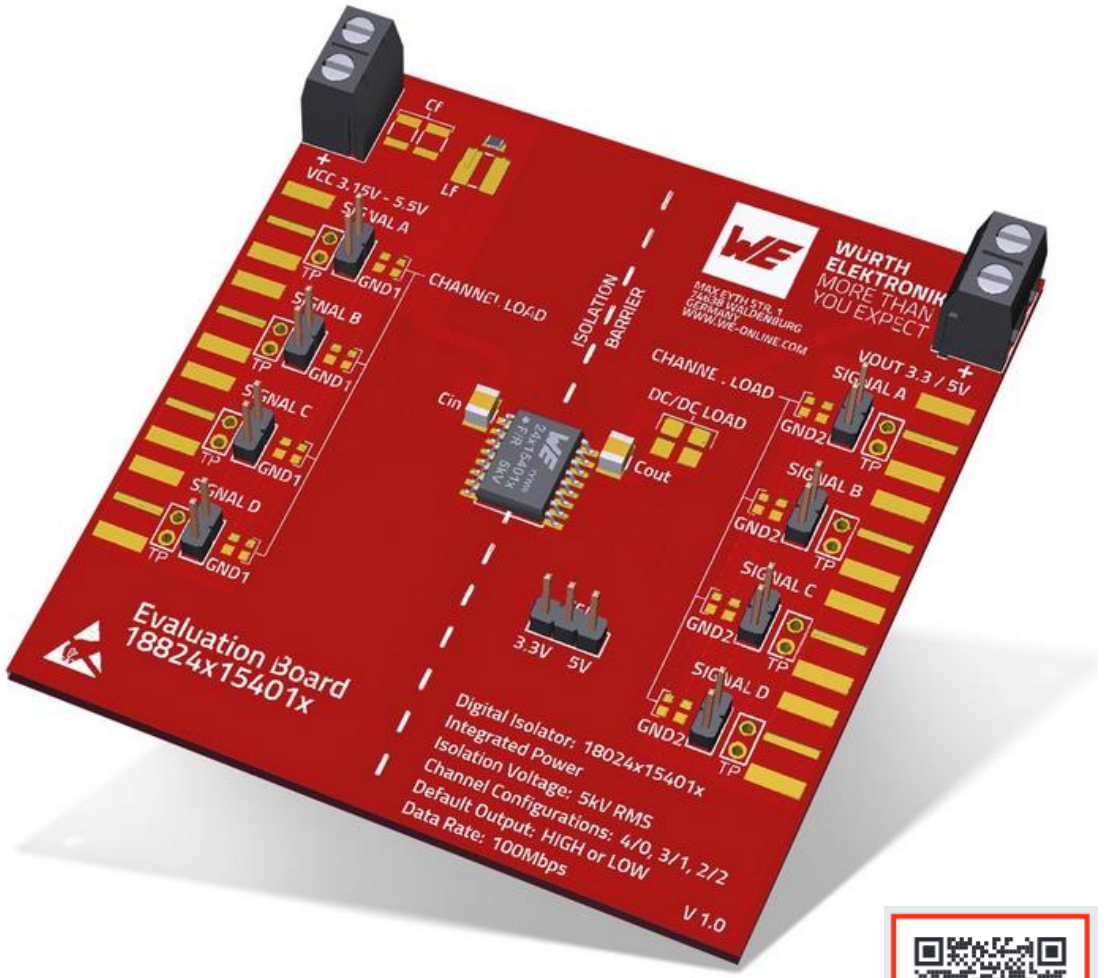

DESIGN SUPPORT

Component Libraries

	Order Code	Data-sheet	Simu-lation	Downloads	Status	$V_{CC\ min.}$ (V)	$V_{CC\ max.}$ (V)	Channel Configuration	t_{PLH}, t_{PHL} (ns)	DR (Mbps)
	18024015401H	SPEC	RE	10 FILES	Active	3.15	5.5	4/0	10	100
	18024015401L	SPEC	RE							100
	18024115401H	SPEC	RE							100
	18024115401L	SPEC	RE							100
	18024215401H	SPEC	RE							100
	18024215401L	SPEC	RE							100

EDA models: Components ZIP

- ALT Altium_WPME-CDIP (rev24a).IntLib | 182.5 KB
- CDS Cadence_WPME-CDIP (rev24a).zip | 592.7 KB
- EAG Eagle_WPME-CDIP (rev23a).lbr | 38.7 KB

CAD files ZIP

- 3D 3D_CDIP_18024x15401x (rev1).pdf | 301.2 KB
- IGS IGS_CDIP_18024x15401x (rev1).igs | 3 MB
- STP STP_CDIP_18024x15401x (rev1).stp | 898 KB

Others ZIP

- PDF Wuerth_Digital_Isolators_VDE_Appendix_500Z1_(Reinforced_SOIC-8WB_SOIC-16WB) (rev1).pdf | 51.7 KB

Download all 10 files as zip archive ZIP

REDEXPERT

Component Selection and Simulation Tool.

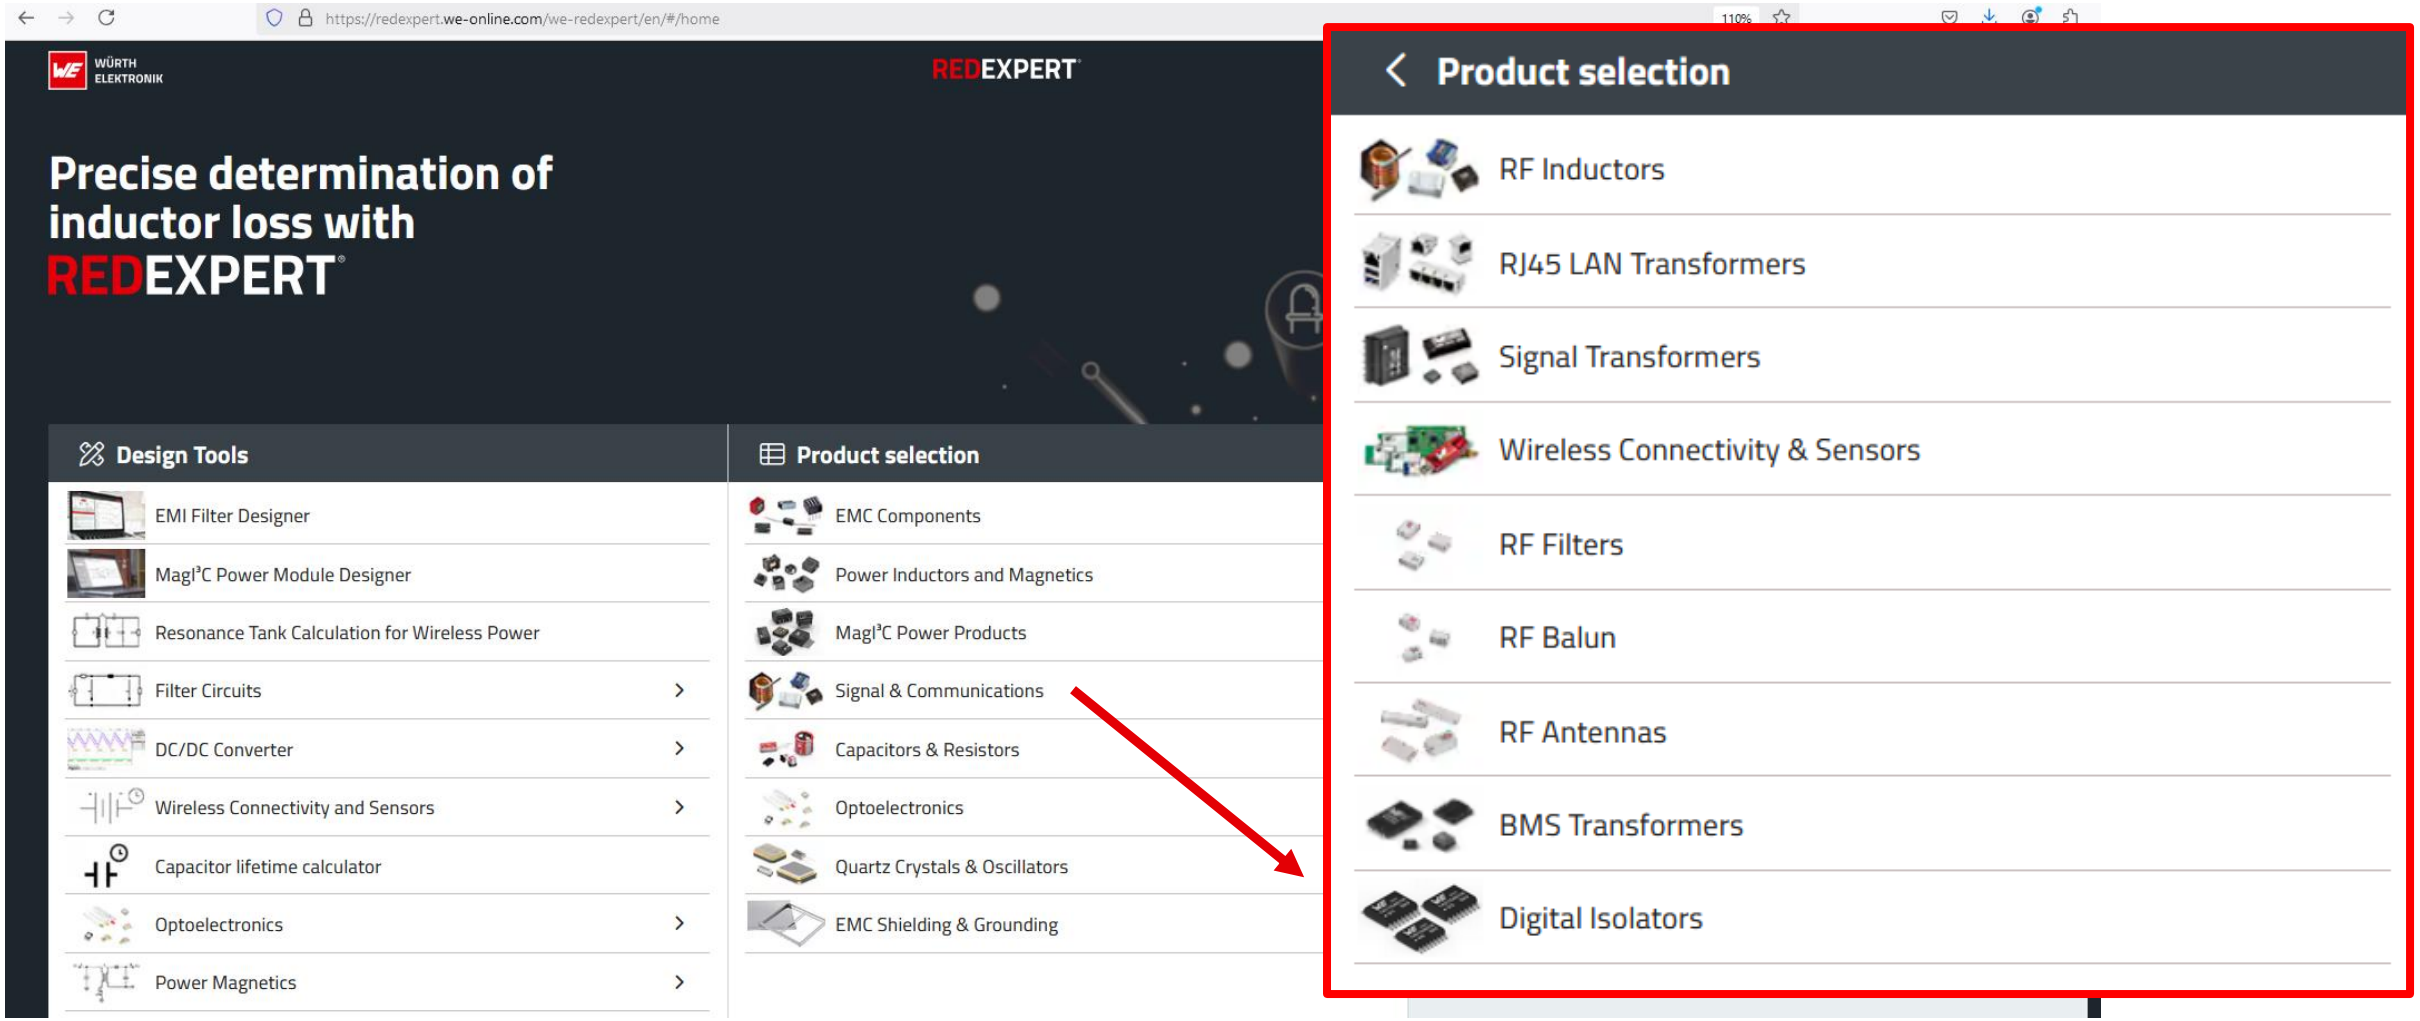

REDEXPERT

Component Selection and Simulation Tool.

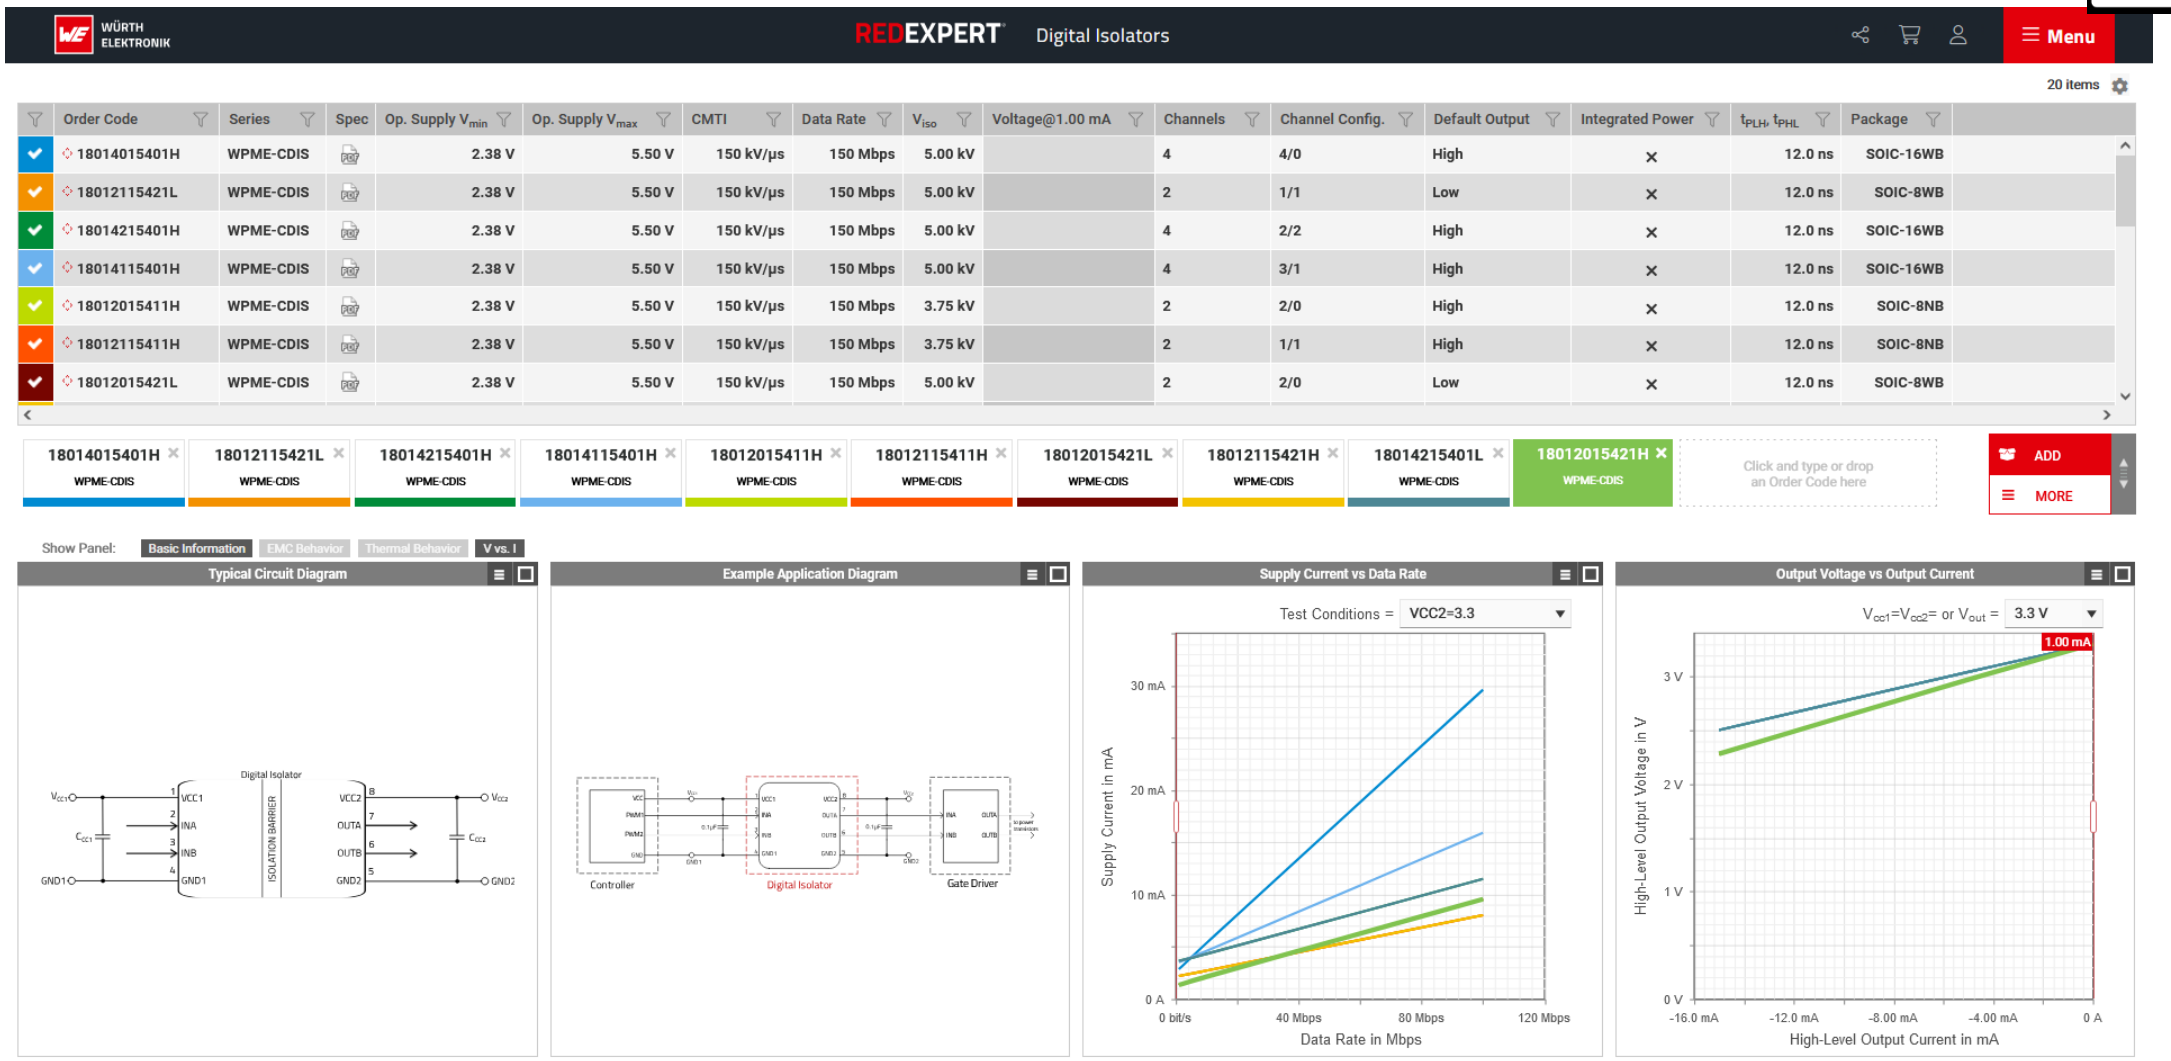

REFERENCES

From our website

- SN026: Isolated RS-485 interface based on 4-channel Digital isolator with integrated DC/DC converter.
- SN028: Isolated CAN Interface Based on a 2-Channel Digital Isolator and an Isolated Power Supply Module.
- ANS021: Ensuring Safety without Compromising Data Integrity – Critical Characteristics of Digital Isolators.
- Industries (Application) Guide
- IC Reference Designs
- ANS022: Bridge capacitor for isolated power modules, the whole truth, no myths.
- Toolbox: Design tools.
- All Application Notes

QUESTION #3

What are the WE support advantages?

a) REDEXPERT – component selection and simulation tool.

b) Downloadable component libraries.

c) Design and technical support.

d) Application notes and reference designs.

e) Evaluation kits and free samples.

f) Competitive pricing, and stocks availability.

g) All of the above ✓

DEMO

Digital Isolator

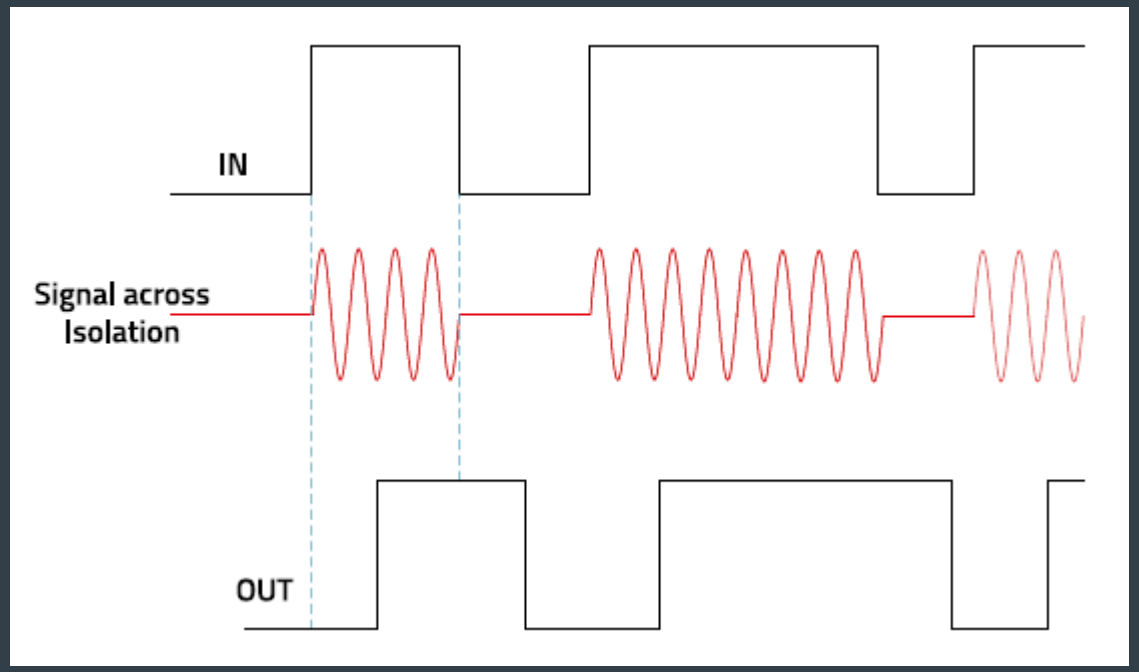

REDEXPERT®

DIGITAL ISOLATOR DEMO

Contents

- Materials and tools
- Test setup
- Measurements

** Some presentation images have clickable web links*

MATERIALS AND TOOLS

- Digital Isolator Evaluation Kit – WE PN: 18824215401L
- Signal Generator
- Oscilloscope
- Multimeter

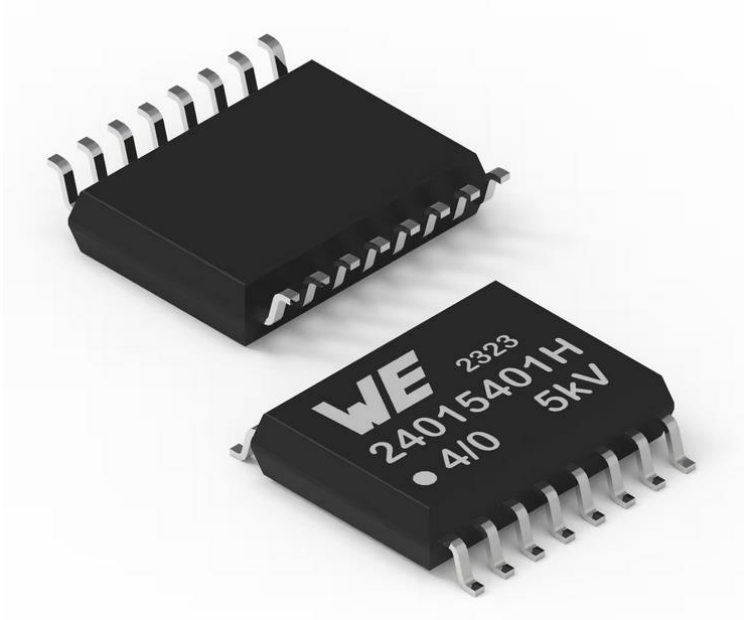

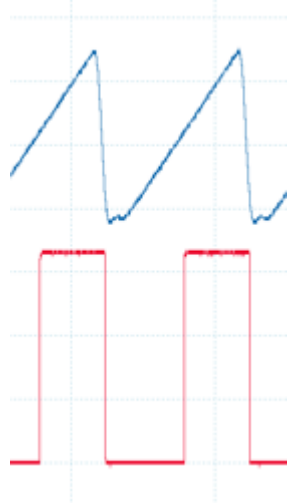

TEST SETUP

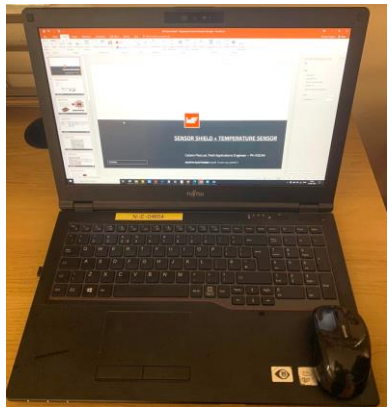

Computer

Oscilloscope + a) Signal Generator

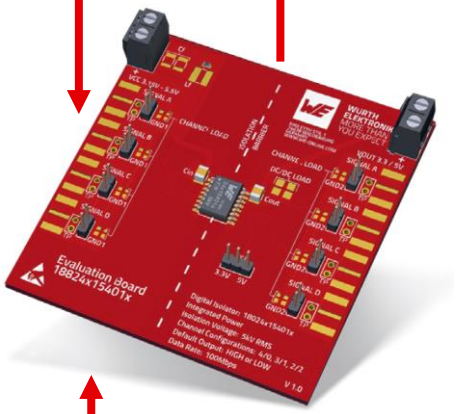

Digital Isolator EV Kit

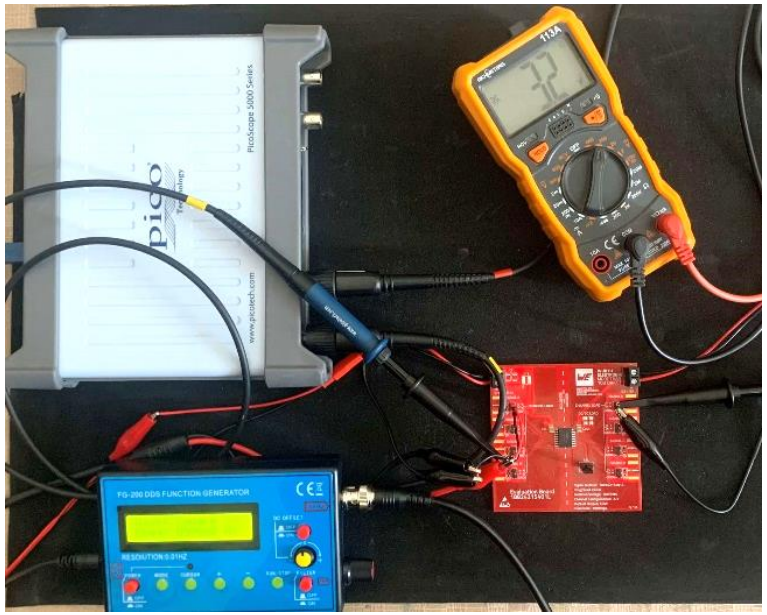

or b) Signal Generator

EVALUATION KIT

Schematic

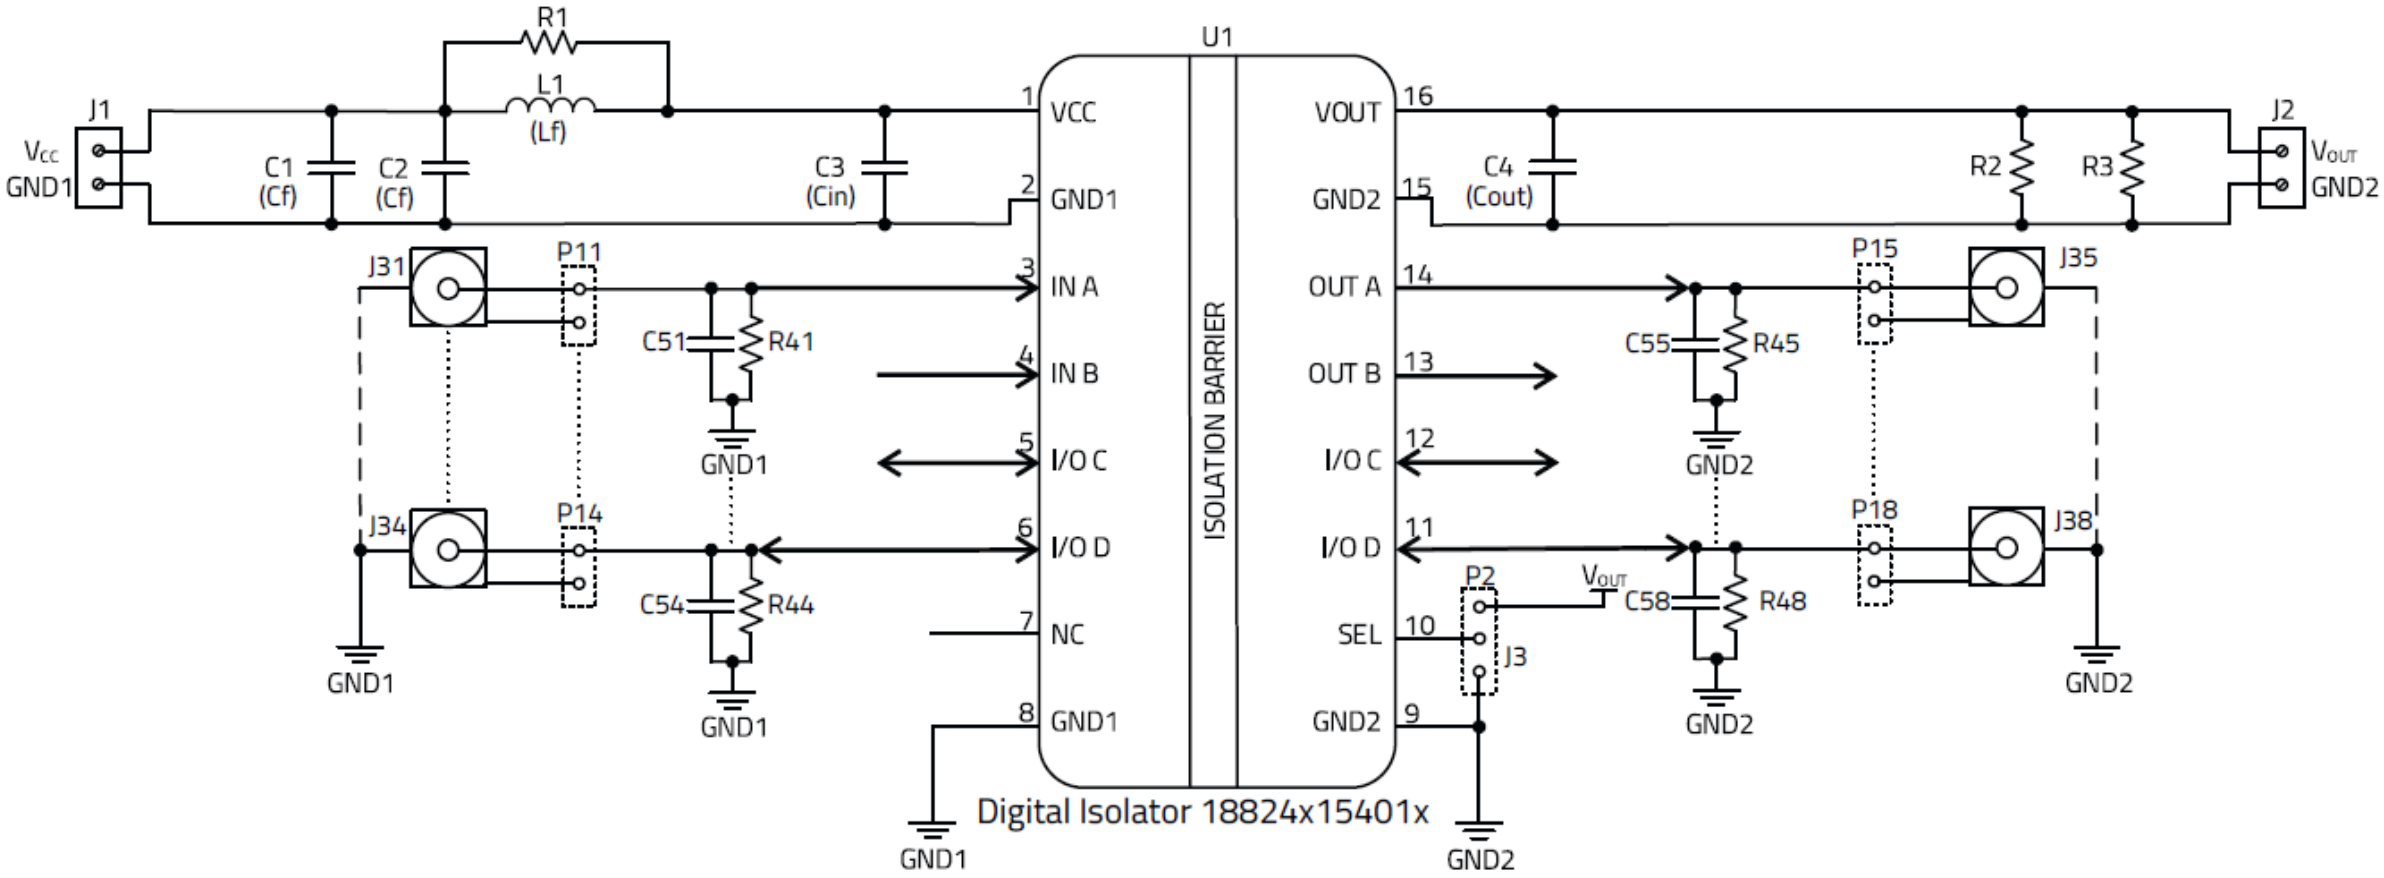

MEASUREMENTS

Input Output

With Gaussian input

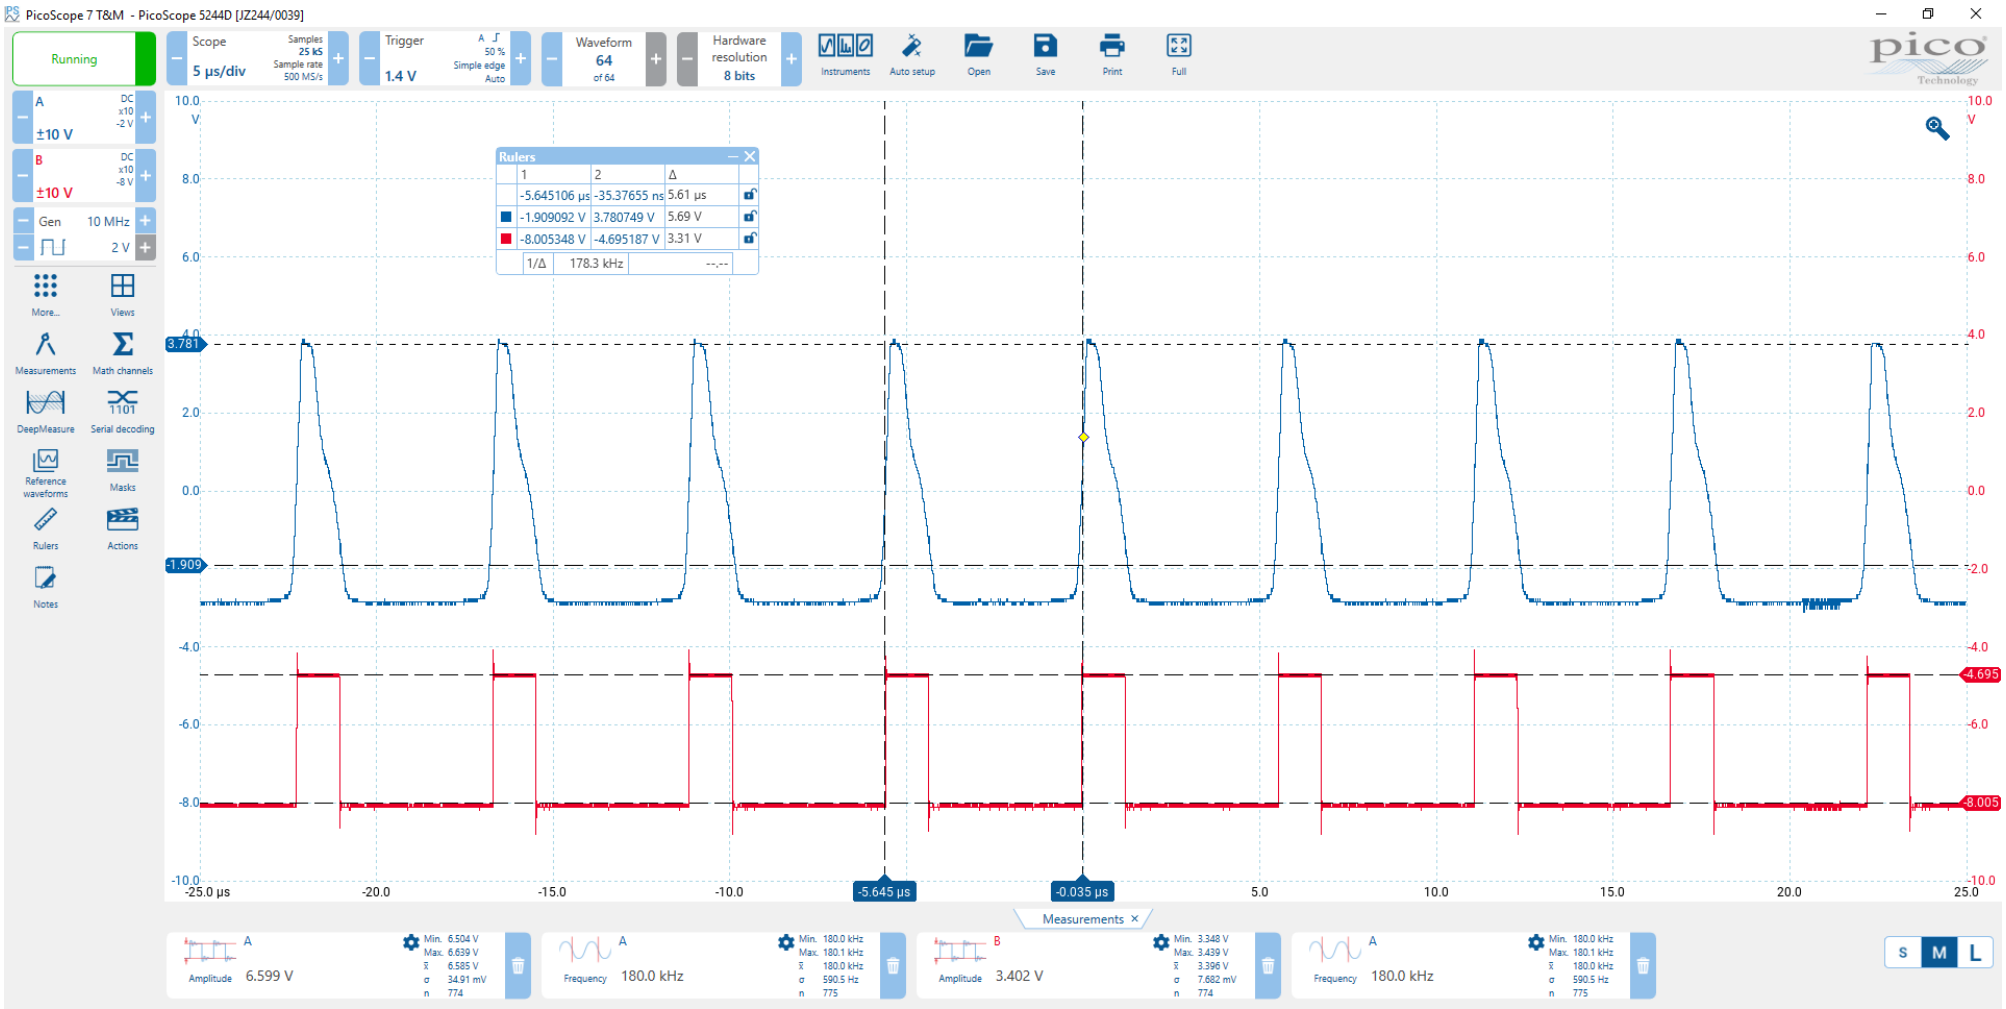

MEASUREMENTS

Input Output

With noisy square wave input

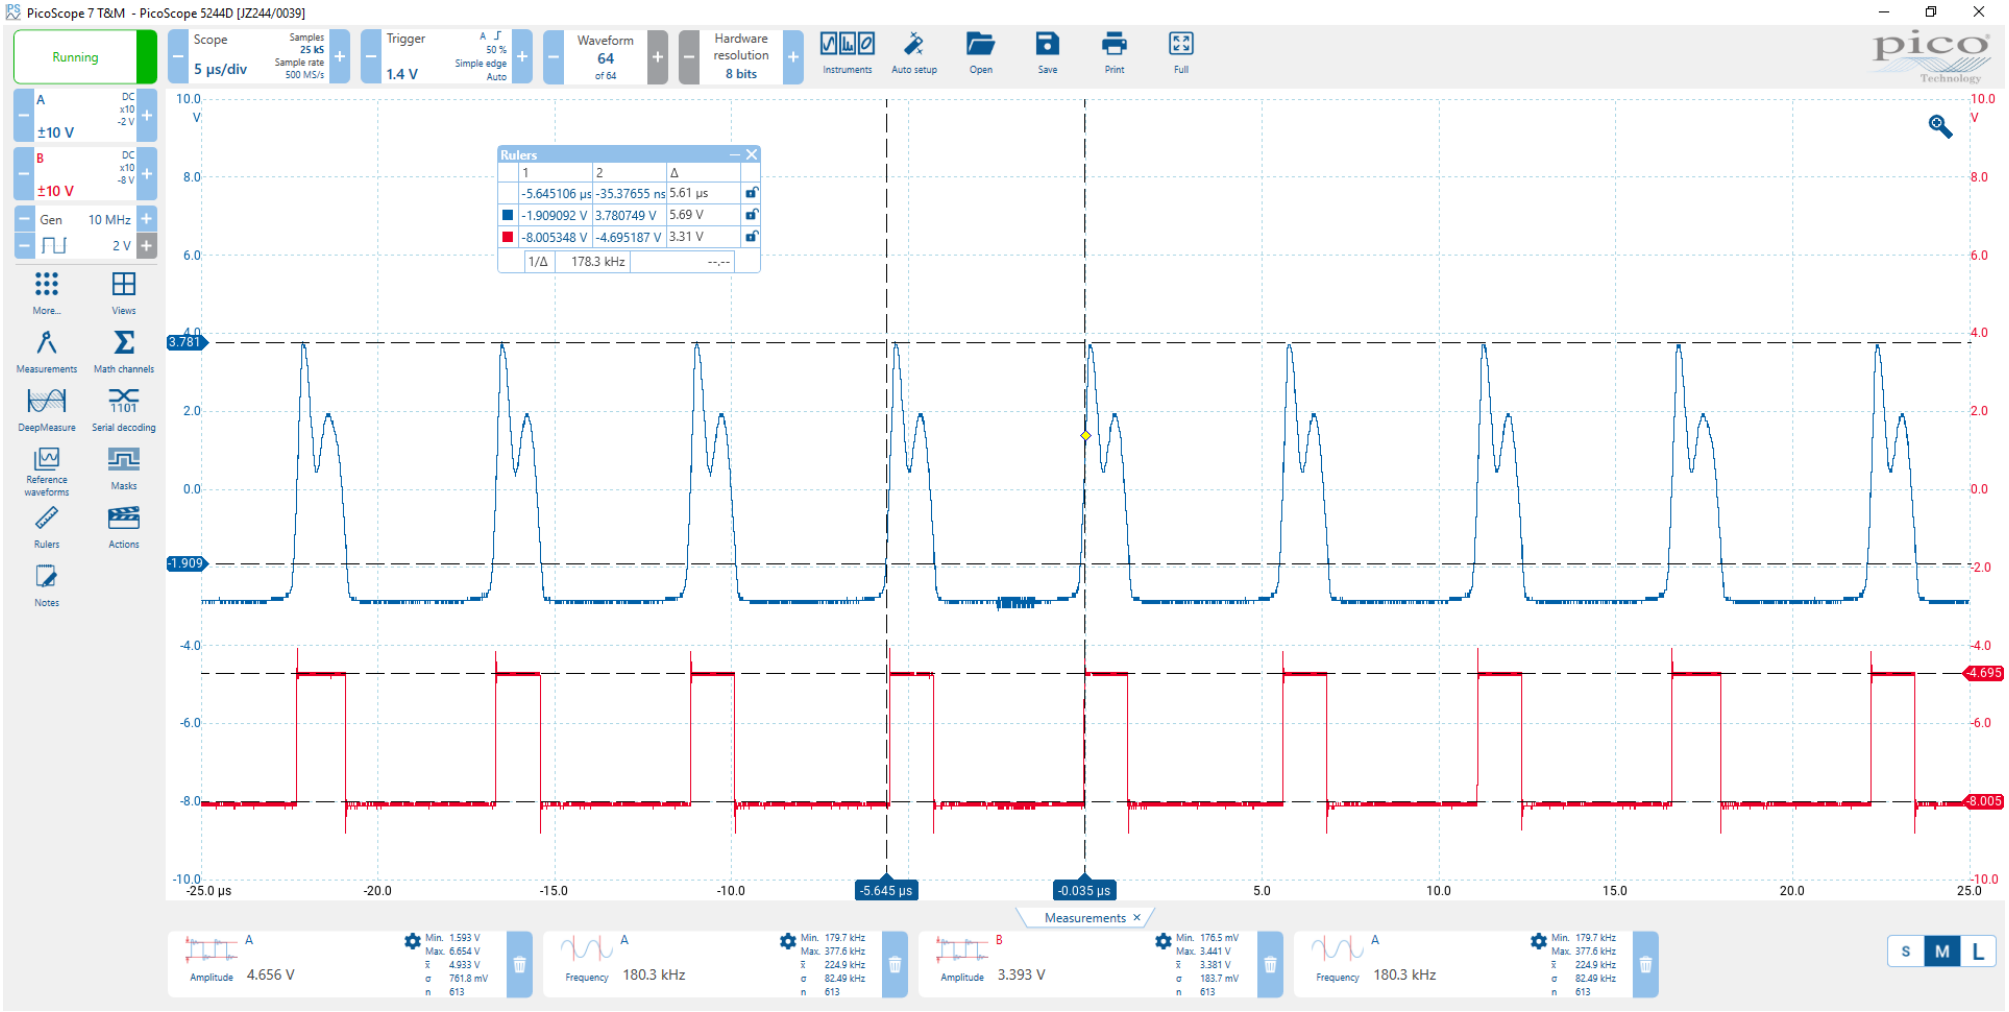

MEASUREMENTS

Input Output

With noisy square wave input

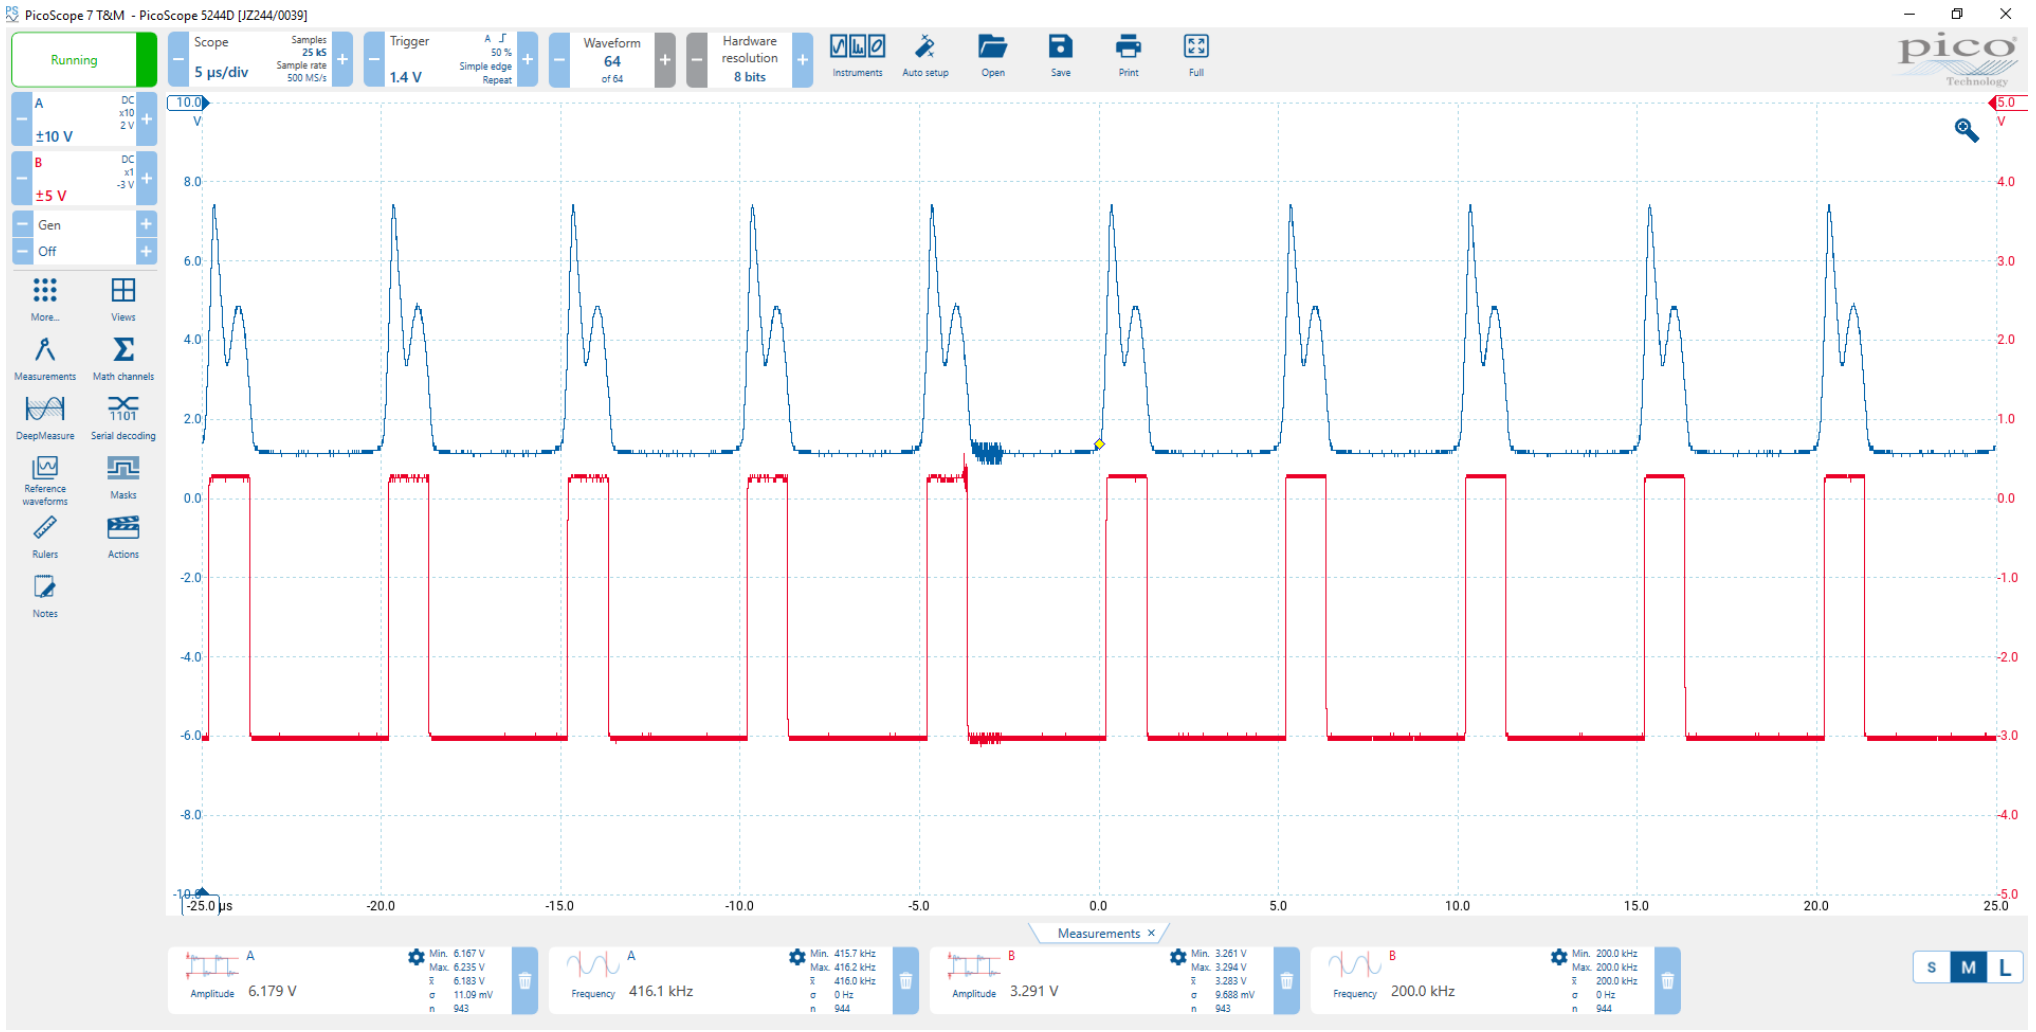

MEASUREMENTS

Input Output

With noisy square wave input

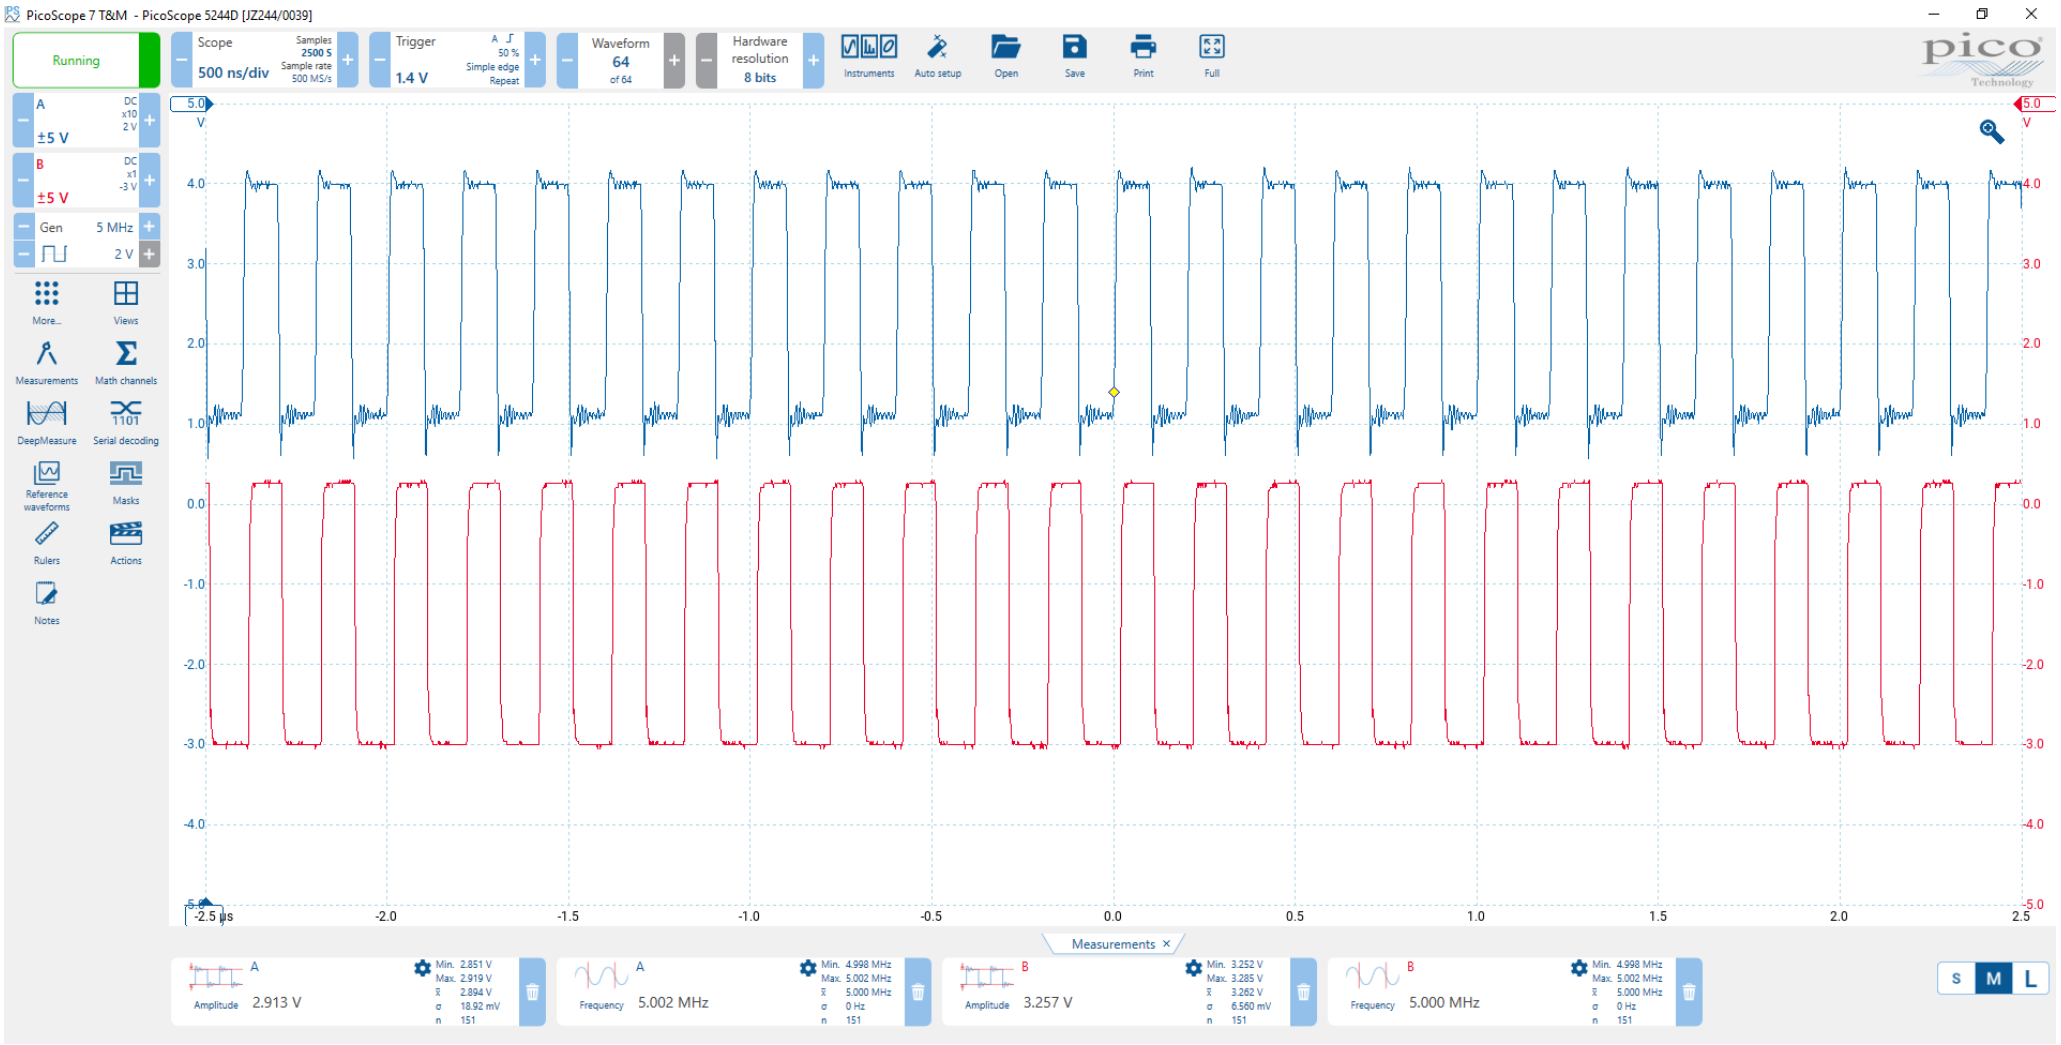

REDEXPERT®

MEASUREMENTS

Input Output

With noisy square wave input

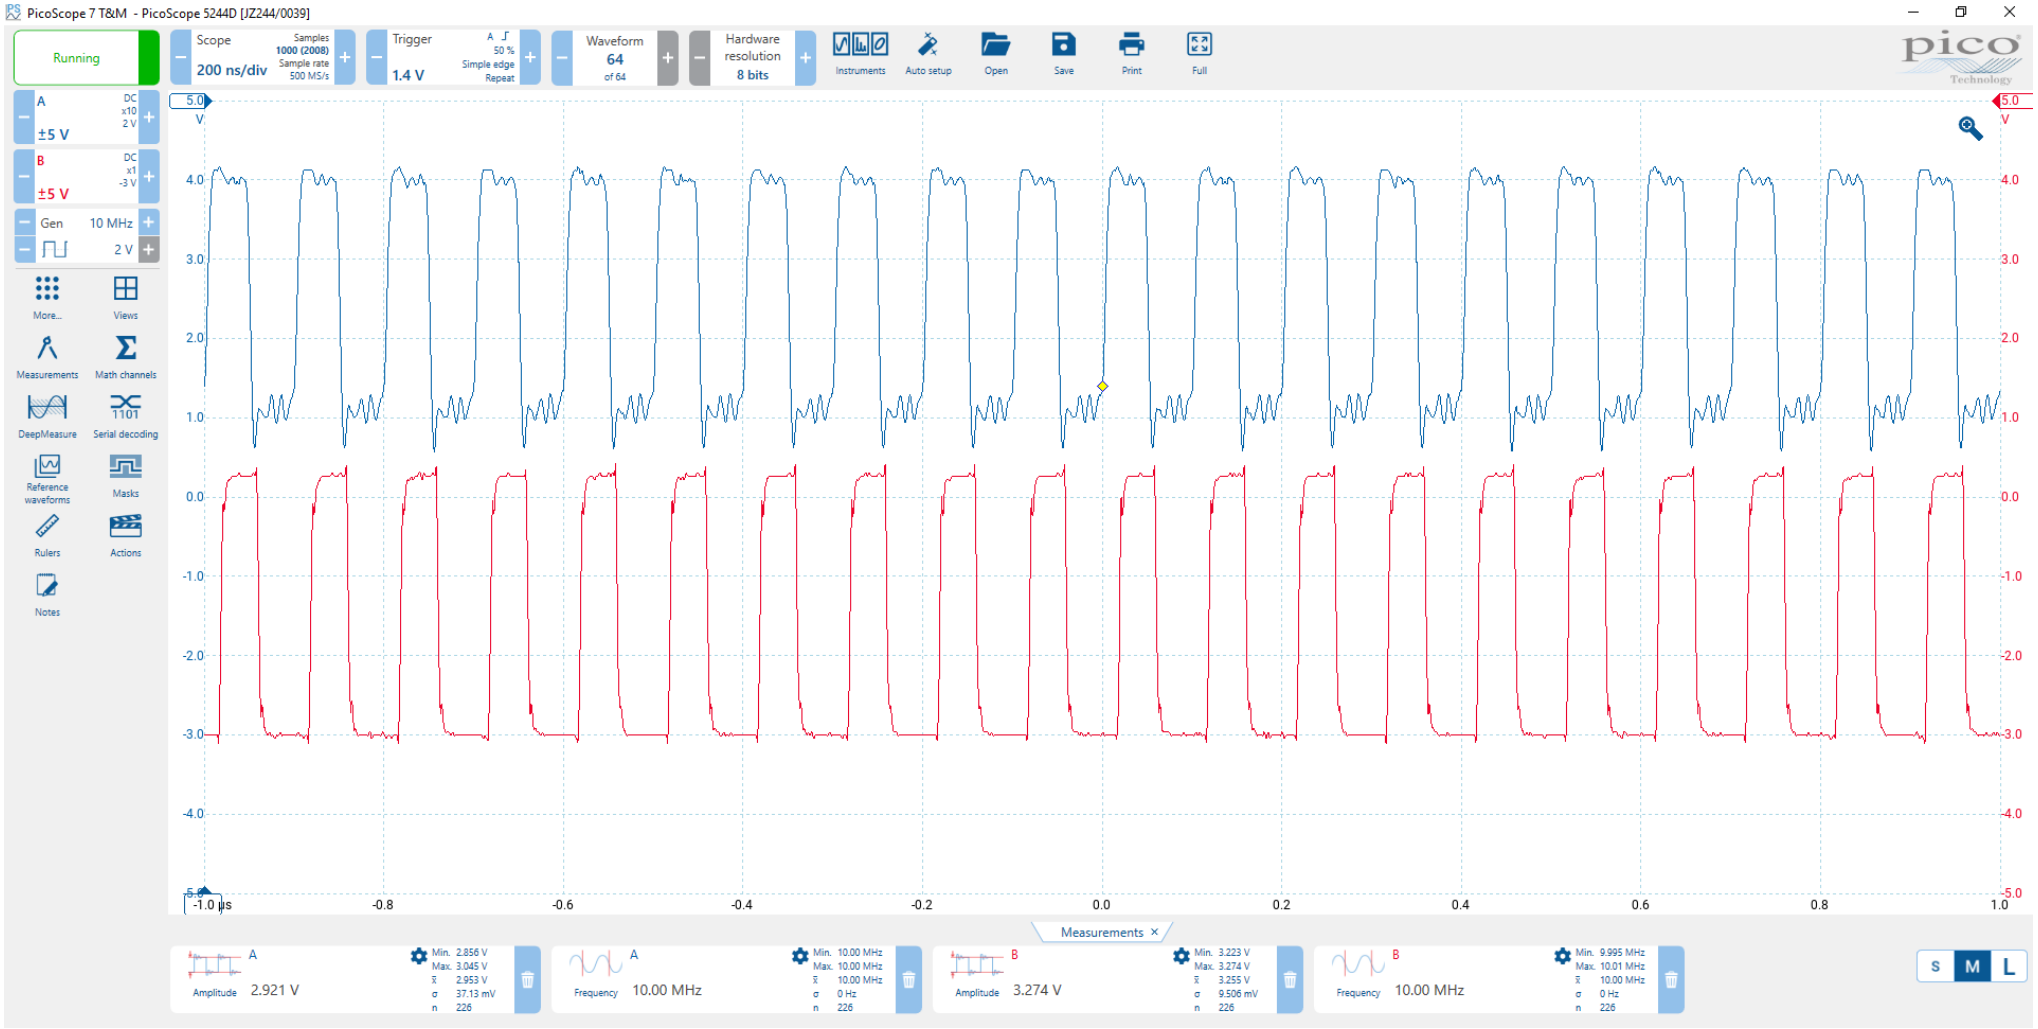

MEASUREMENTS

Input Output

With noisy square wave input

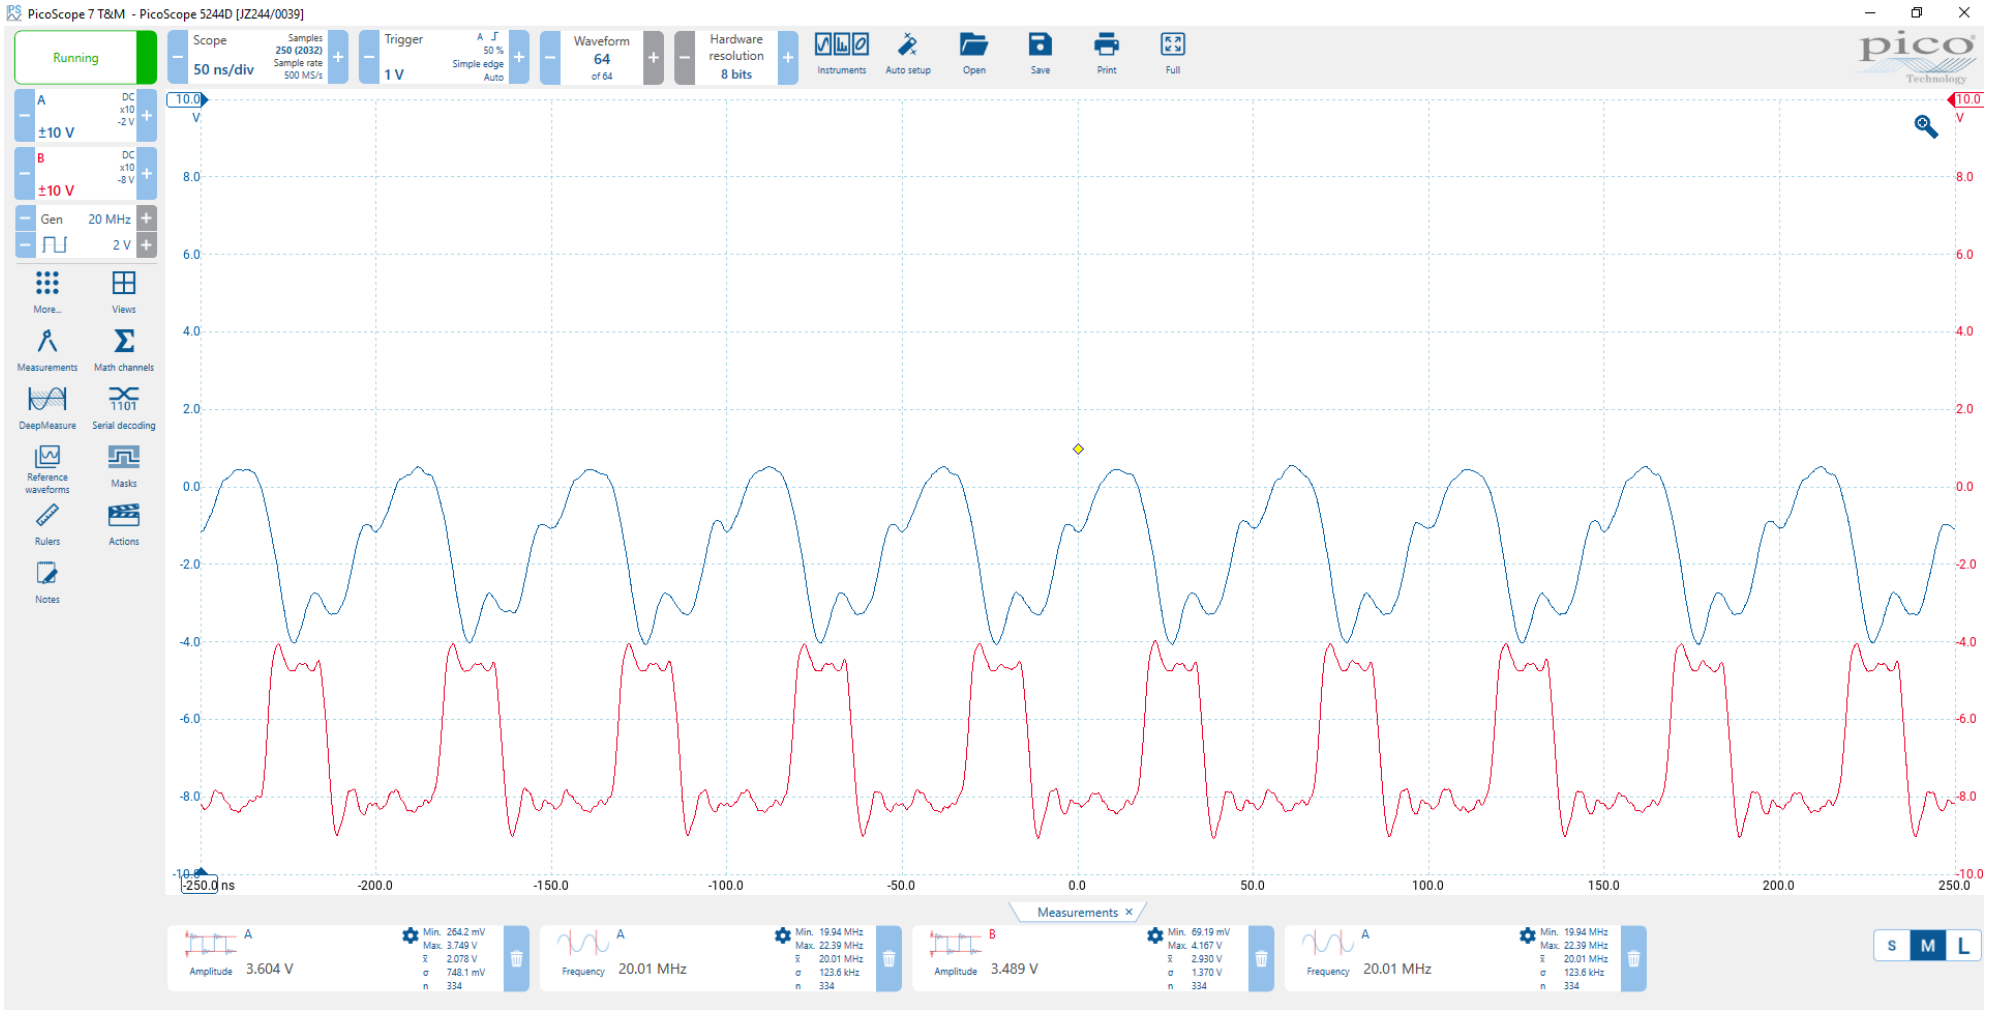

MEASUREMENTS

Input Output

With ramp down input

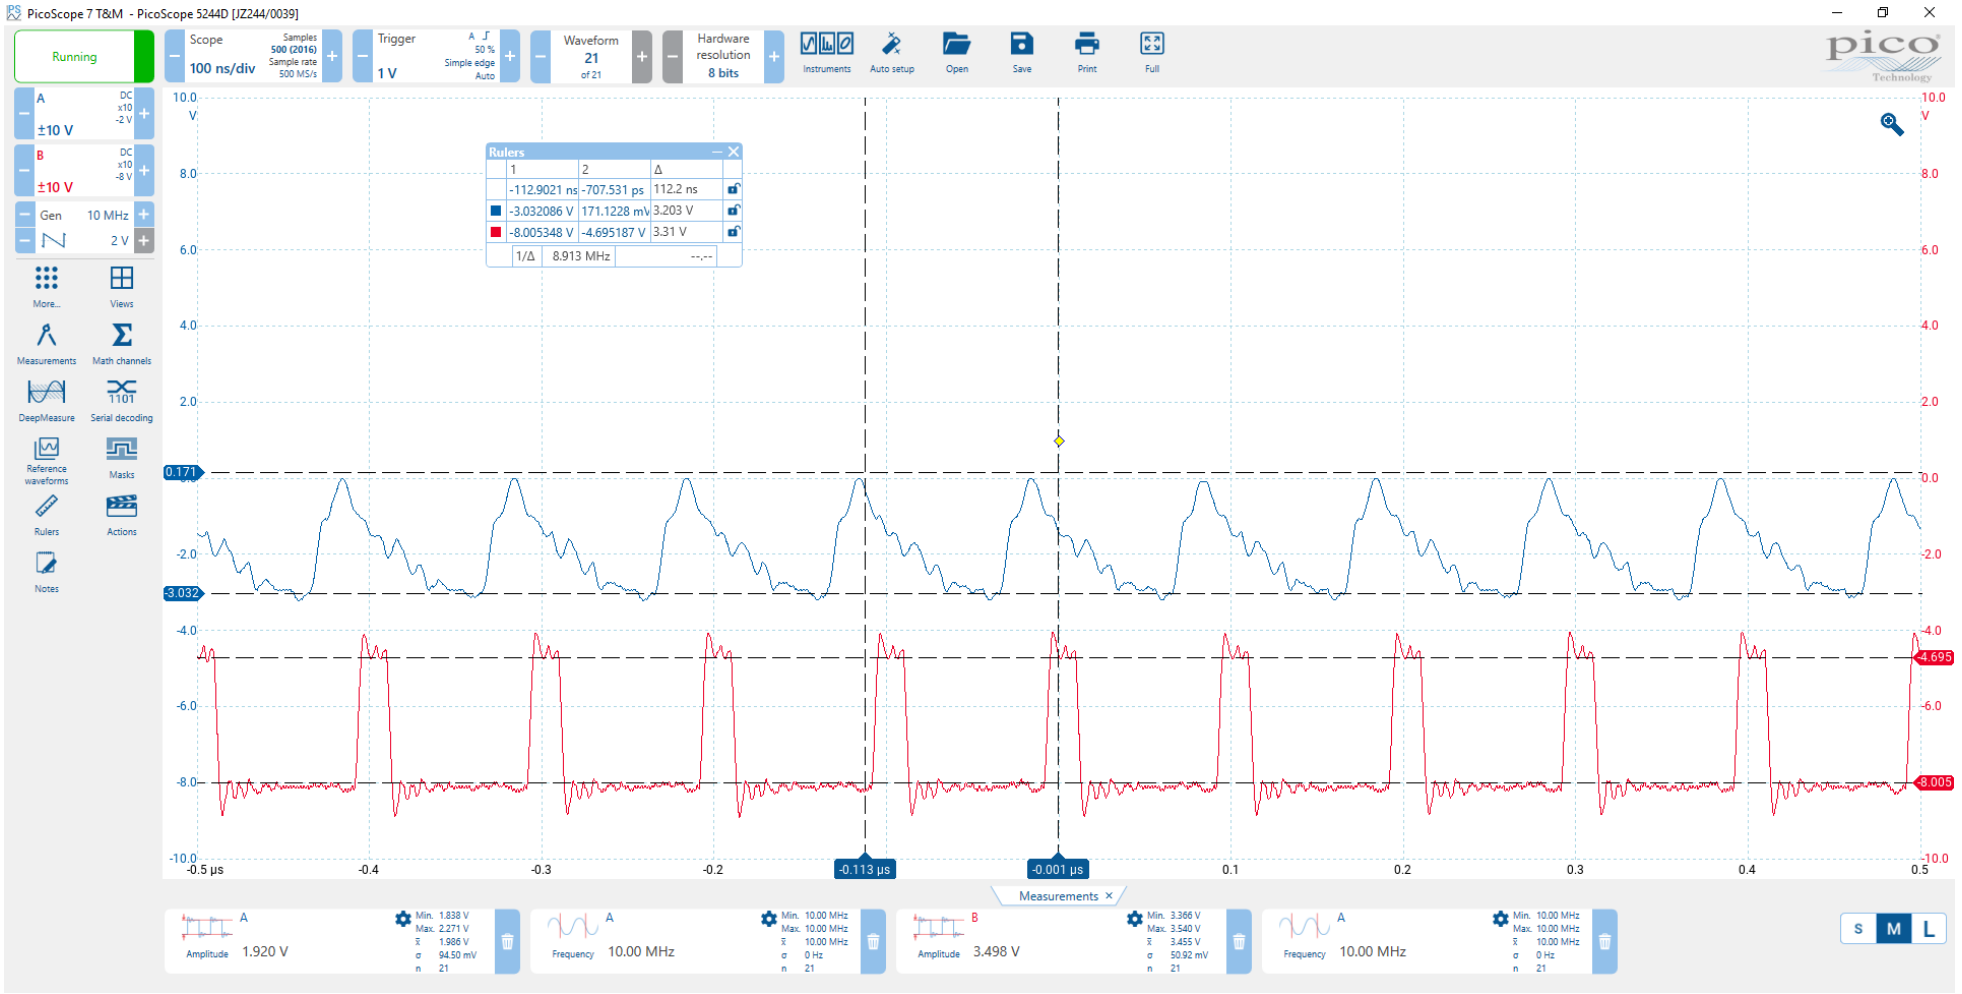

REDEXPERT®

MEASUREMENTS

Input Output

With half sine input

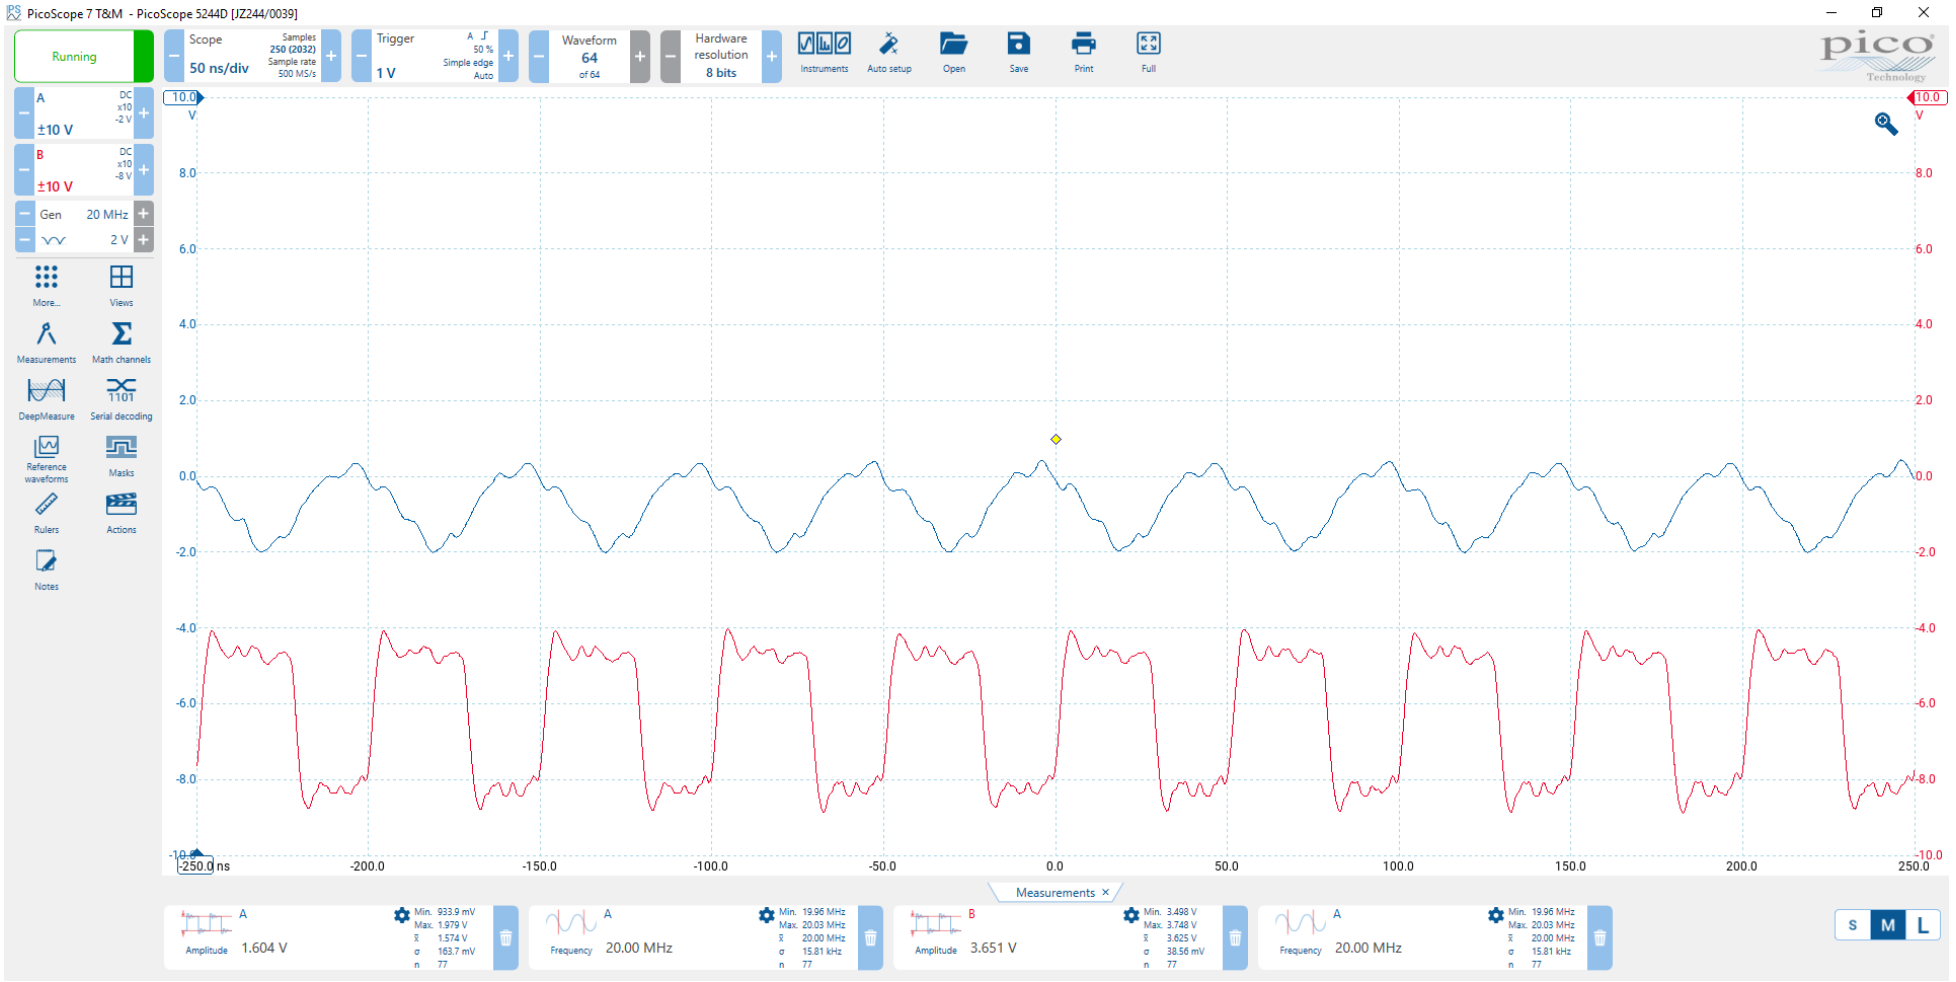

MEASUREMENTS

Input Output

With sawtooth input

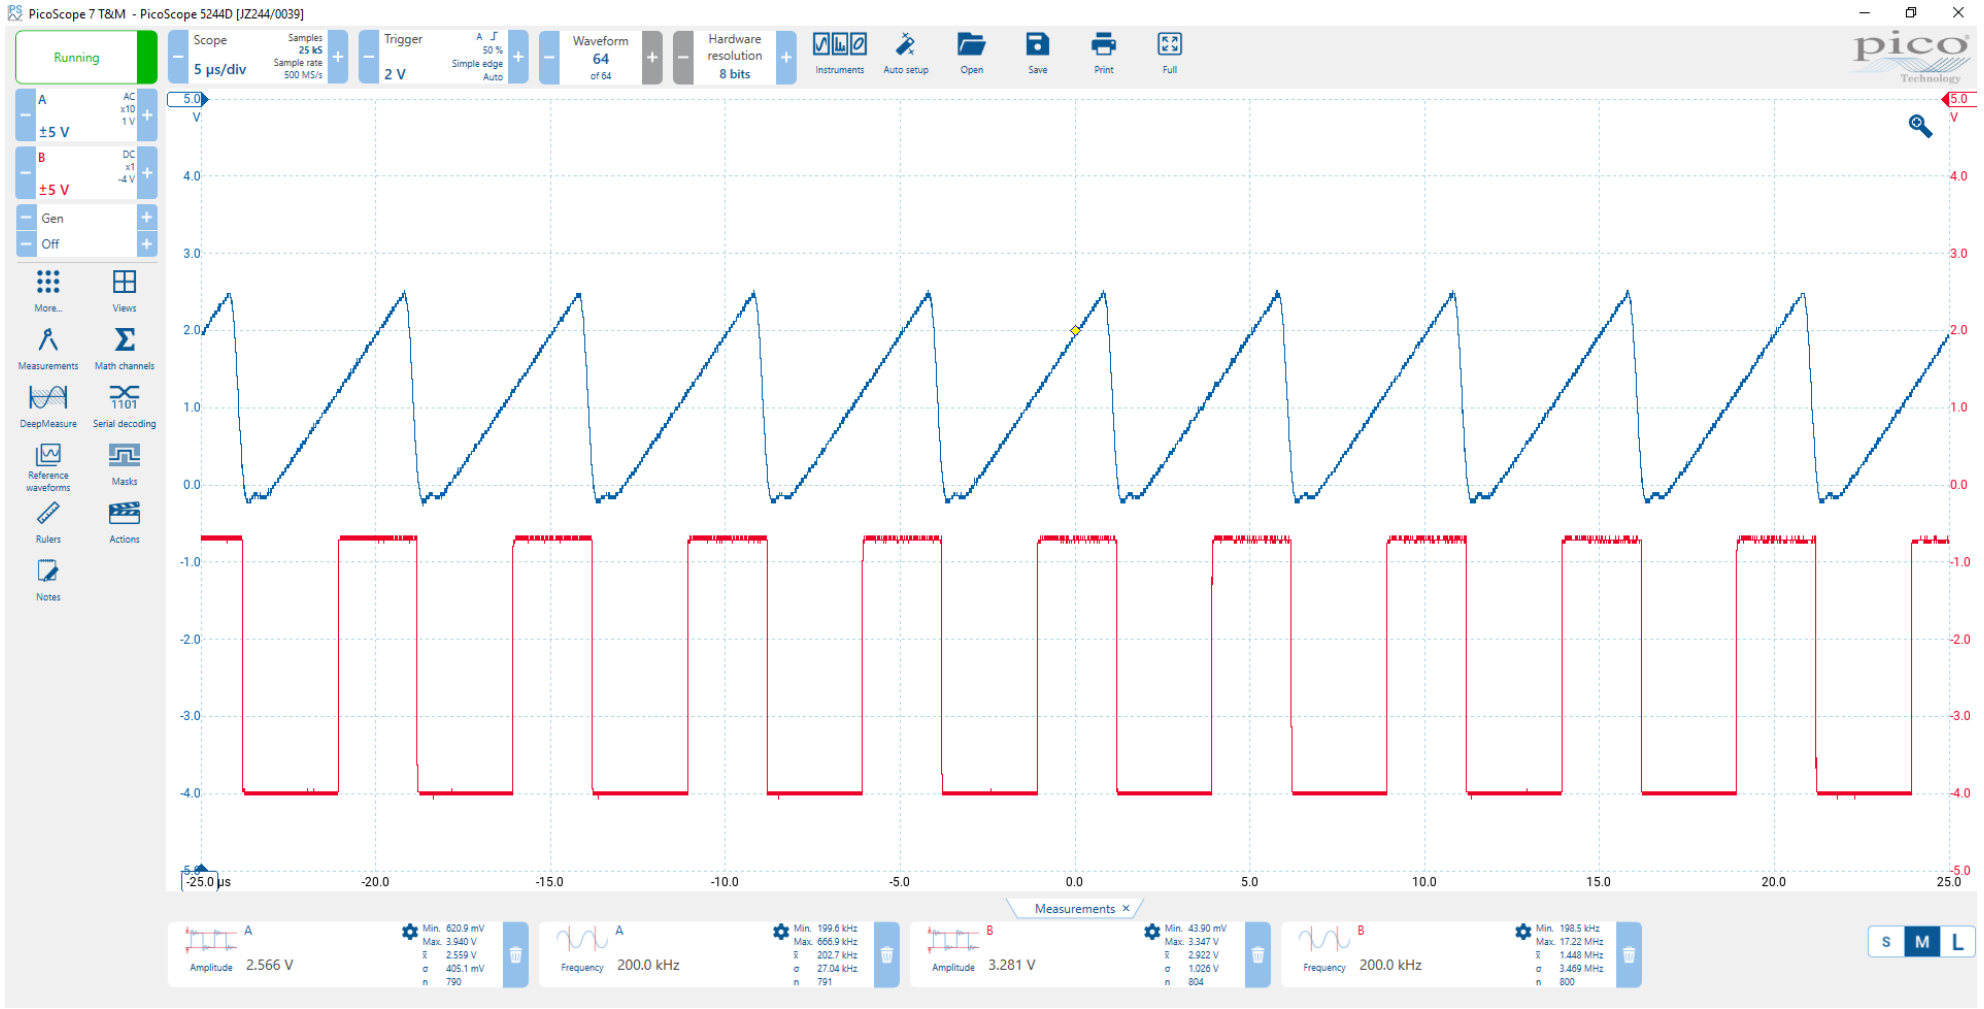

MEASUREMENTS

Input Output

With reverse sawtooth input

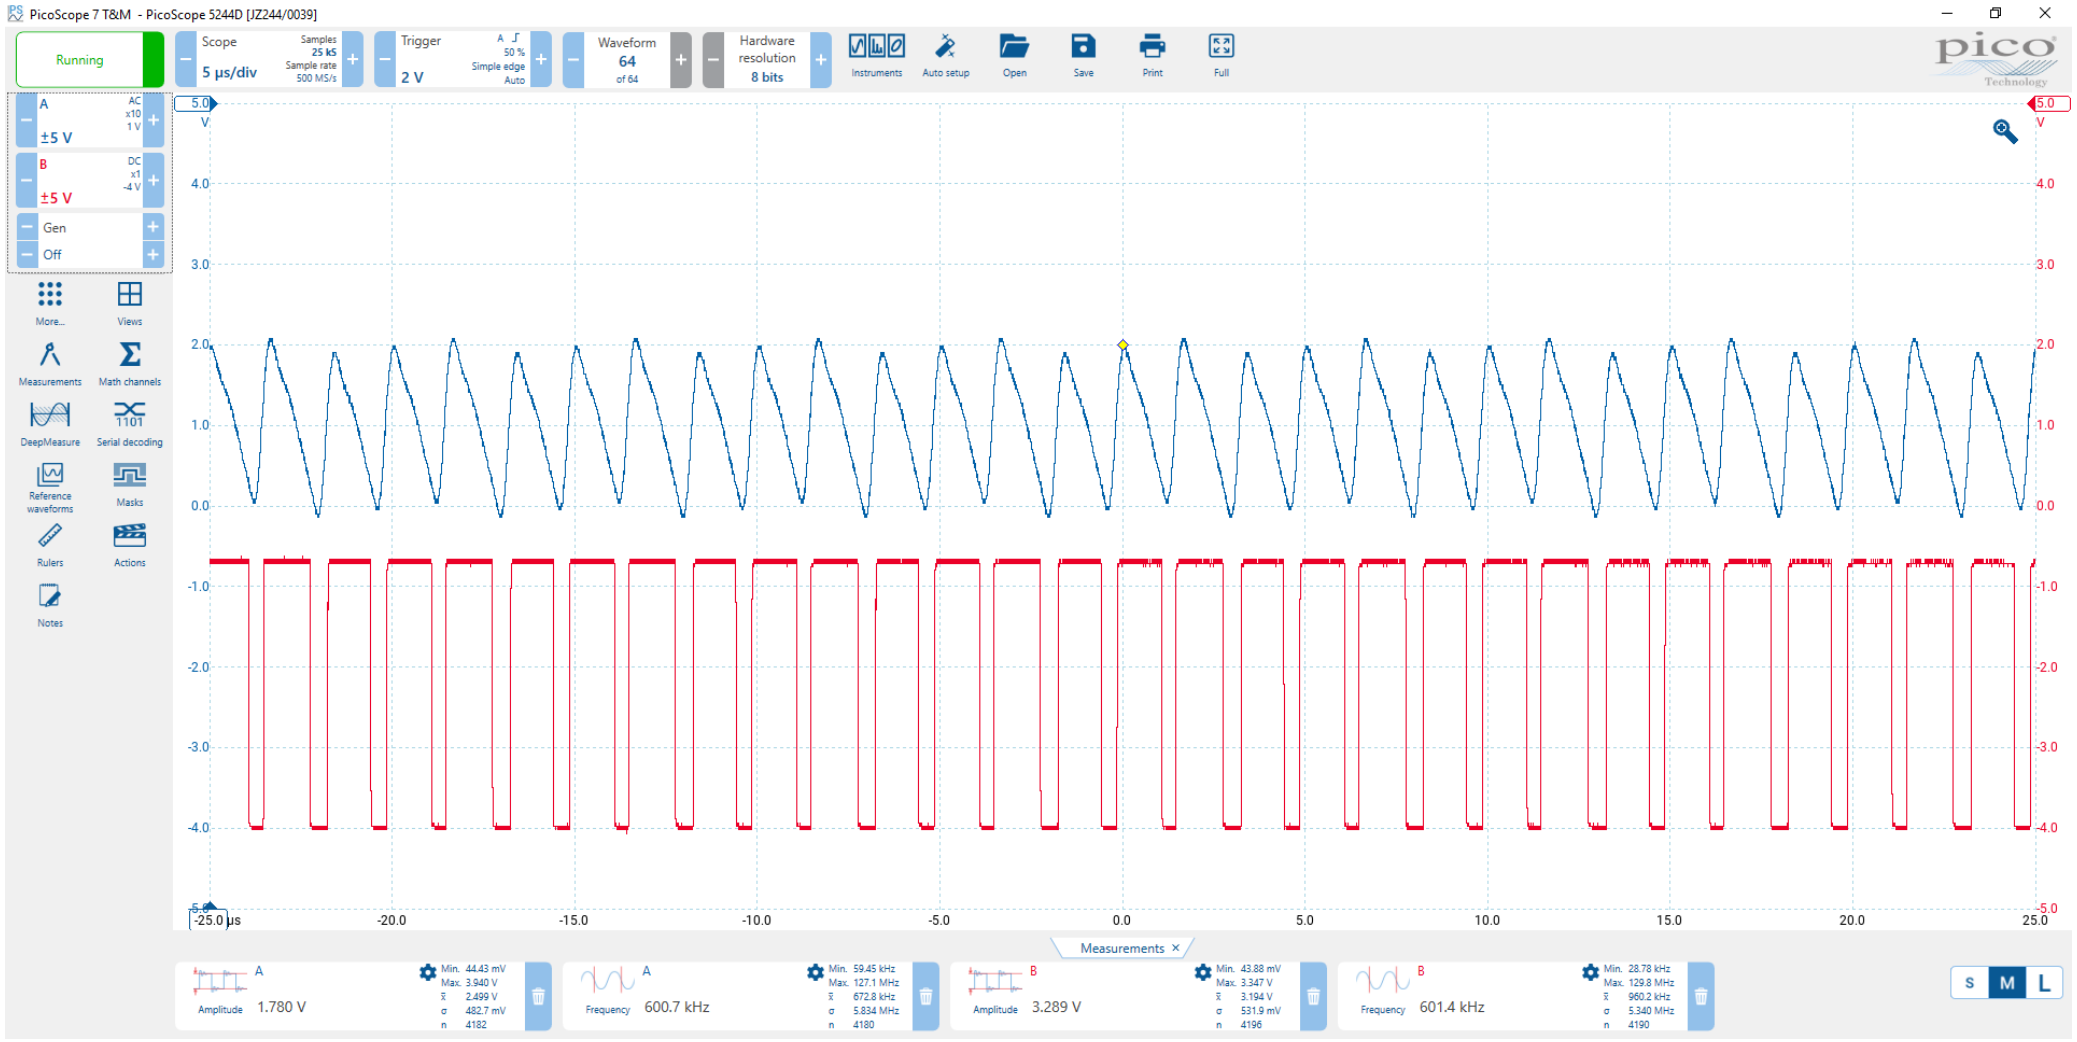

MEASUREMENTS

Input Output

With sine wave input

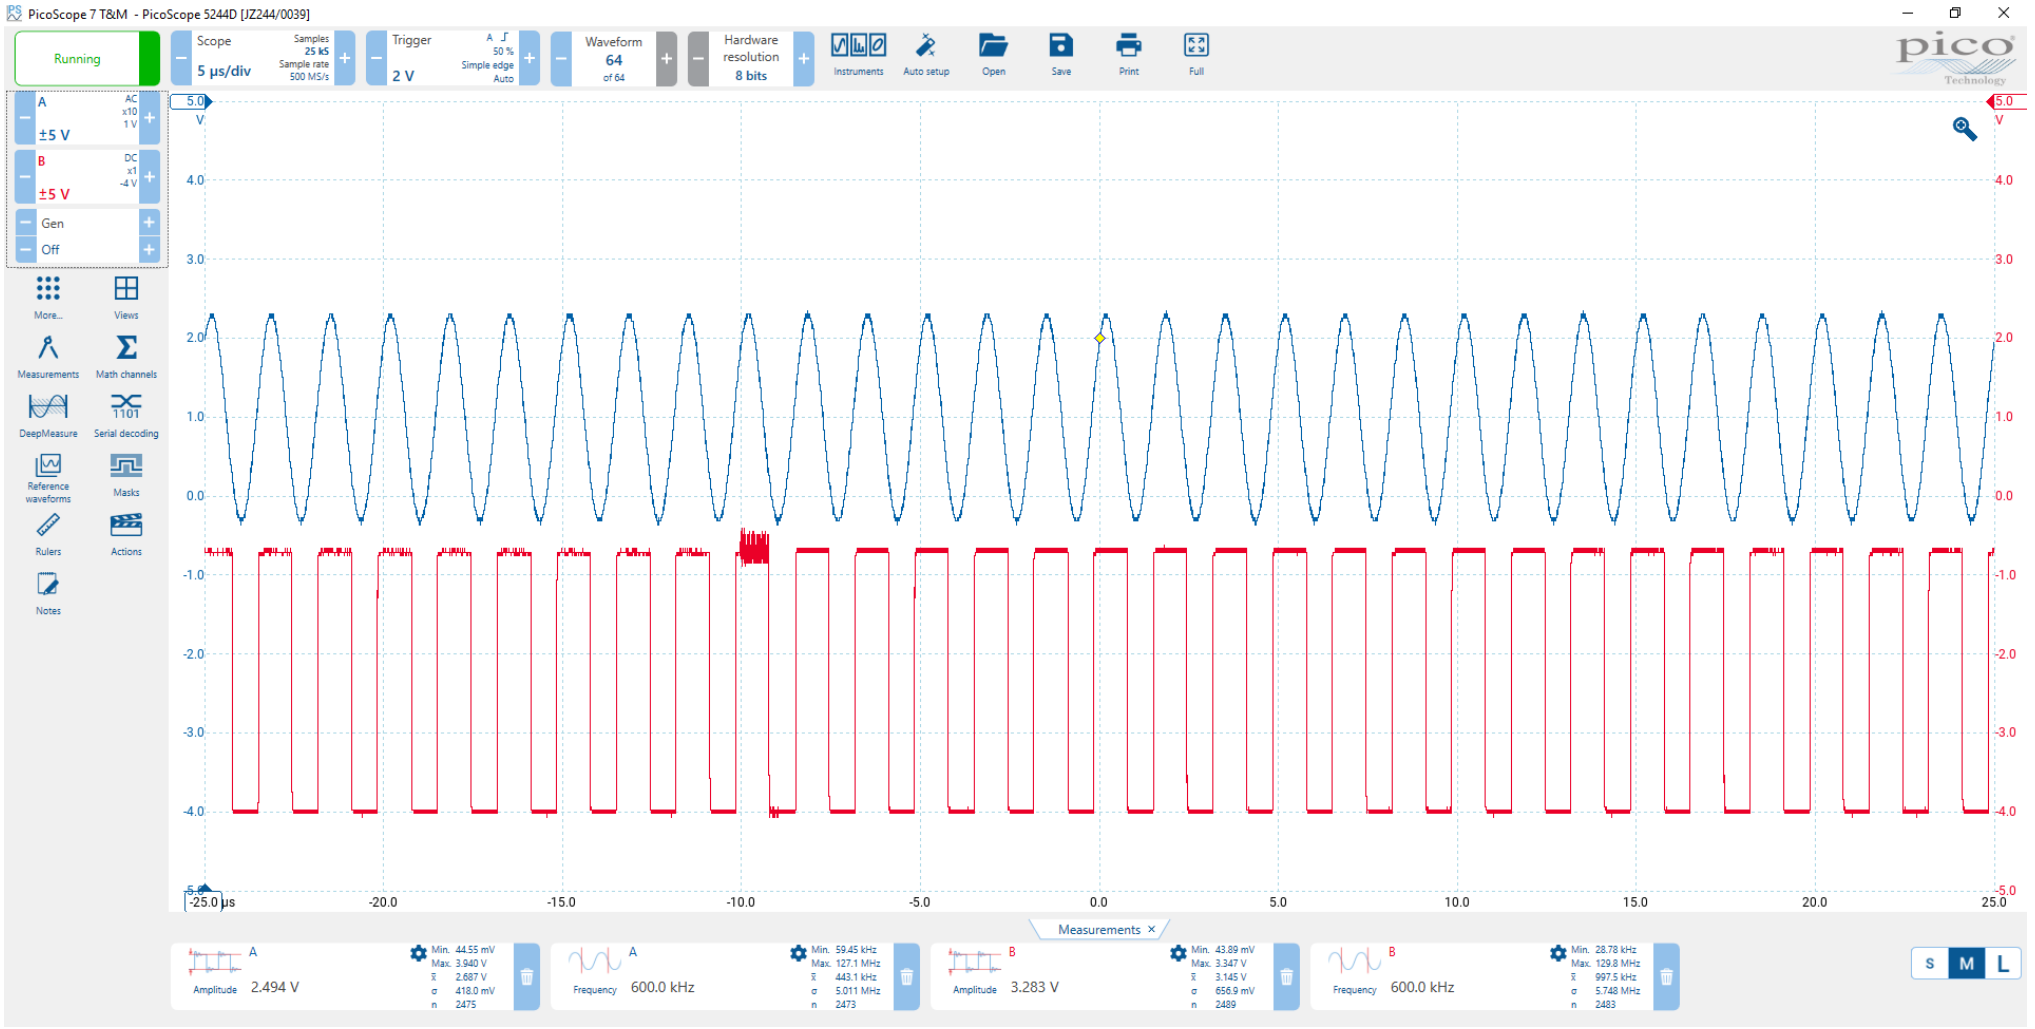

THANK YOU

Carpov.Pascual@we-online.com