


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect




PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID

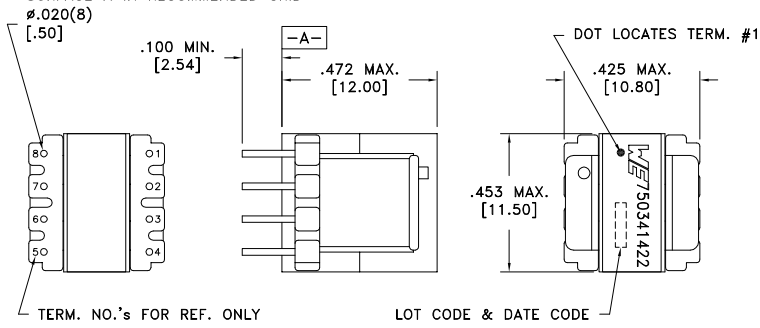

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.531 ohms ±10%
D.C. RESISTANCE	4-5 @20°C	1.32 ohms ±10%
INDUCTANCE	2-5 10kHz, 100mVAC, Ls	2.20mH ±10%
TURNS RATIO	(2-5):(2-4)	3.01:1, ±1%
TURNS RATIO	(2-5):(4-5)	1.49:1, ±1%

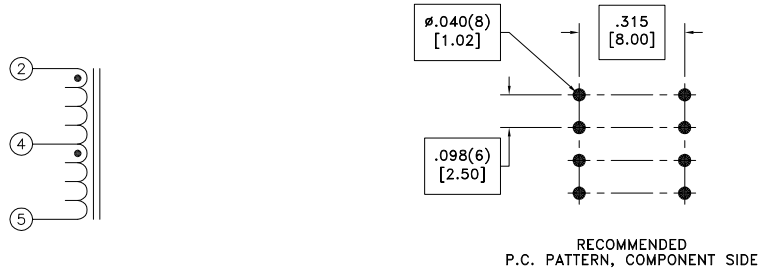

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0728 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE INDUCTOR	PART NO. 750341422
6A	3/13	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341422	SPECIFICATION SHEET 1 OF 1