



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

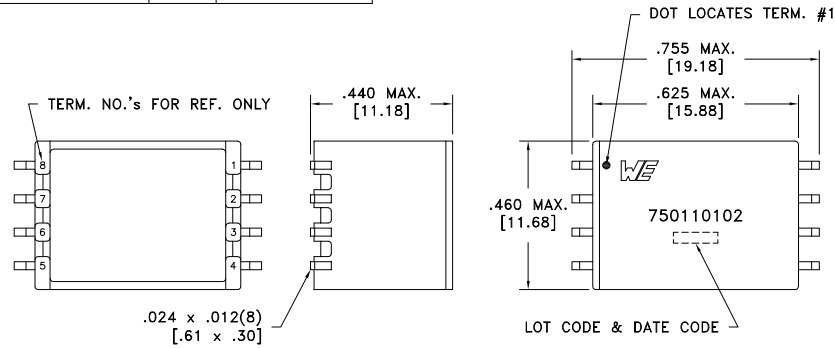

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	1.20 ohms max.
D.C. RESISTANCE	8-5 @20°C	1.20 ohms max.
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	60uH min.
DIELECTRIC	1-8 8.75kVAC, 1 second	7kVAC, 1 minute
TURNS RATIO	(1-4):(8-5)	1.08:1, ±2%

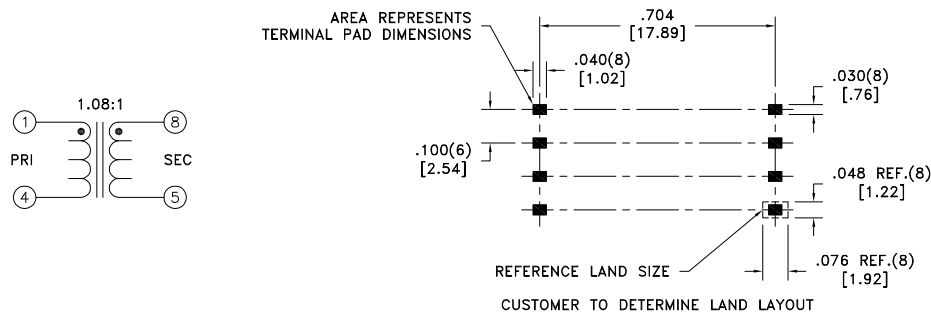

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to meet EN50470-1, Class II, <300V, reinforced insulation.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
6D	4/19	Method: Tape & Reel		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	750110102
6C	4/13	PKG-0892				
6B	1/13	www.we-online.com/midcom				
6A	11/12	SEE REVISION SHEET FOR REVISION LEVEL				
					eiSos p/n: 750110102	SPECIFICATION SHEET 1 OF 1