
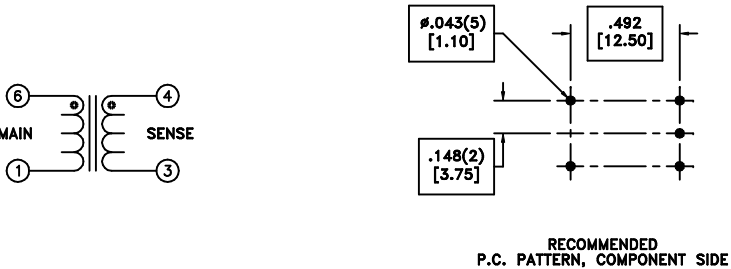


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

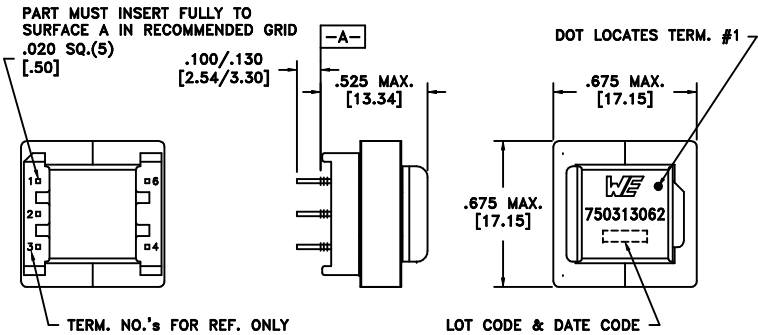

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	6-1 @20°C	0.200 ohms max.
D.C. RESISTANCE	4-3 @20°C	2.00 ohms max.
INDUCTANCE	6-1 100kHz, 1.0VAC, Ls	155uH ±5%
SATURATION CURRENT	20% rolloff from initial	2.8A
LEAKAGE INDUCTANCE	6-1 tie(3+4), 100kHz, 100mVAC, Ls	12uH max.
DIELECTRIC	6-4 500VAC, 1 second	500VAC, 1 minute
URNS RATIO	(6-1):(4-3)	1.67:1, ±2%

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.
 Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tray PKG-0096 www.we-online.com/midcom		Angles: ±1° Fractions: ±1/64	INDUCTOR	750313062
				Decimals: ±.005 [.13] Footprint: ±.001 [.3]		
6A	11/12	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750313062	SPECIFICATION SHEET 1 OF 1

