


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect




TERM. NO.'s FOR REF. ONLY

DOT LOCATES TERM. #1



LOT CODE & DATE CODE

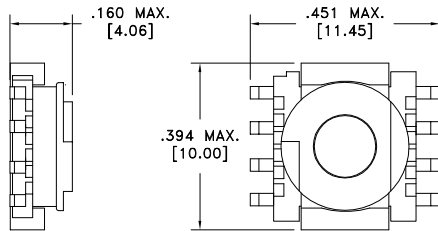


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	4-1 @20°C	4.10 ohms ±10%
INDUCTANCE	4-1 10kHz, 100mVAC, Ls	100uH ±10%


GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional Insulation Only.



AREA REPRESENTS TERMINAL PAD DIMENSIONS

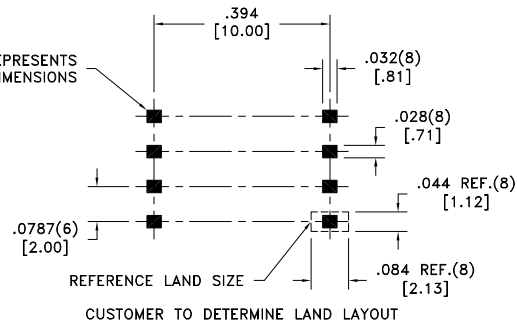

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-1052 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE <b>INDUCTOR</b>	PART NO. <b>750315110</b>
6A	9/15	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750315110	SPECIFICATION SHEET 1 OF 1