

Sn96%, Ag4%	Yes	Yes
CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE



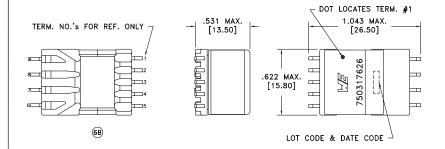

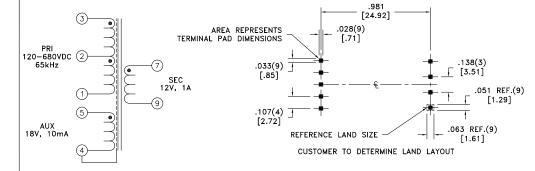

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	@20°C	1.638 ohms ±10%
D.C. RESISTANCE	4-5	@20°C	1.740 ohms ±10%
D.C. RESISTANCE	7-9	@20°C	0.030 ohms ±20%
INDUCTANCE	3-1	10kHz, 100mVAC, Ls	1.14mH ±10%
SATURATION CURRENT	3-1	20% rolloff from initial	800mA
LEAKAGE INDUCTANCE	3-1	tie(4+5, 7+9), 100kHz, 100mVAC, Ls	15uH typ., 30uH max.
DIELECTRIC	1-7	tie(3+4), 3750VAC, 2 seconds	3000VAC, 1 minute
DIELECTRIC	1-4	625VAC, 2 seconds	500VAC, 1 minute
TURNS RATIO		(2-1):(3-2)	1:1, ±1%
TURNS RATIO		(3-1):(5-4)	6:1, ±1%
TURNS RATIO		(3-1):(7-9)	9:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Reinforced insulation for a primary circuit at a working voltage of 265Vrms, 400Vpeak, Overvoltage Category II.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1: - Supplementary insulation for a primary circuit at a working voltage of 480Vrms,

680Vpeak, Overvoltage Category II.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Fackaging specifications
		Method: Tape & Reel
		PKG-1057 www.we-online.com/midcom
6B	5/22	www.we-offliffe.com/ffffdcofff
6Δ	12/19	SEE REVISION SHEET FOR REVISION LEVEL

DATE | Dealersing Considerations

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

eiSos p/n: 750317626

## TRANSFORMER

750317626

PART NO.