


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

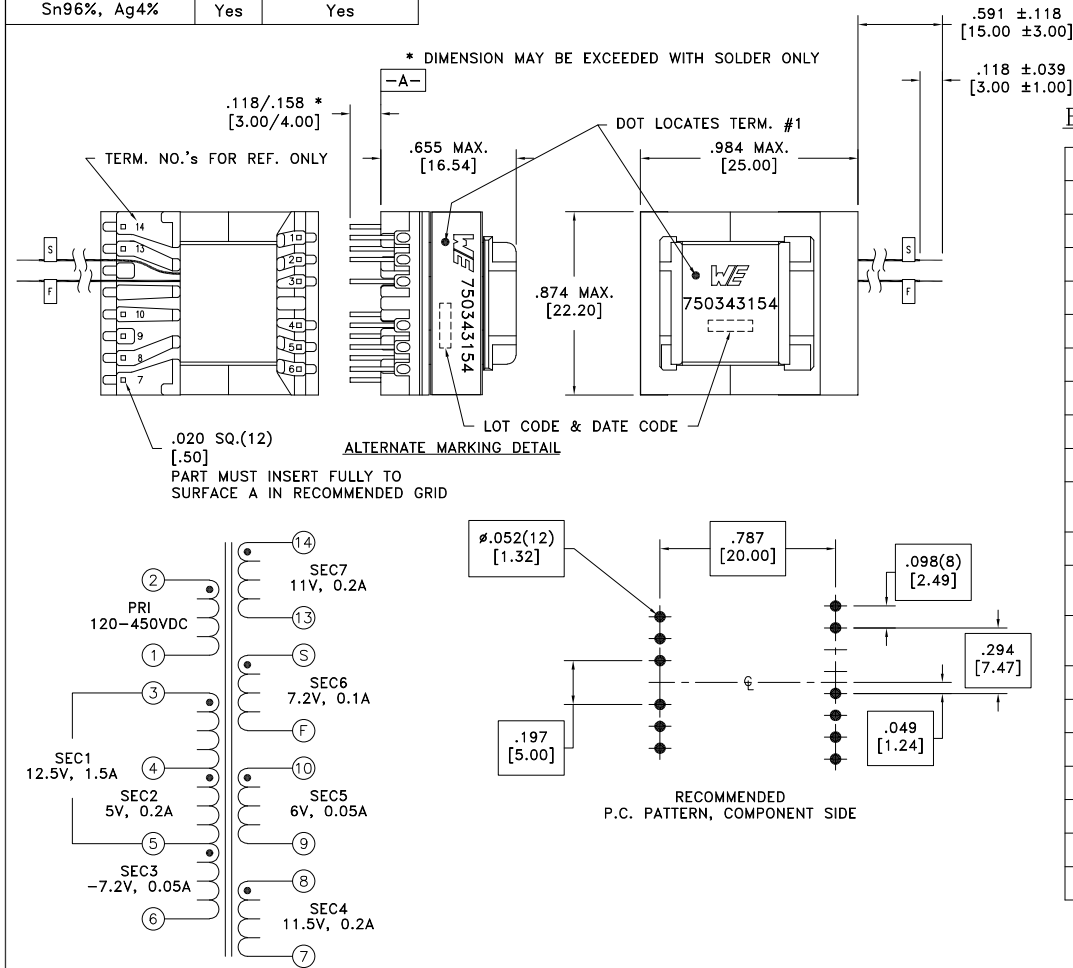

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-1	@20°C
D.C. RESISTANCE	3-5	@20°C
D.C. RESISTANCE	4-5	@20°C
D.C. RESISTANCE	5-6	@20°C
D.C. RESISTANCE	8-7	@20°C
D.C. RESISTANCE	10-9	@20°C
D.C. RESISTANCE	S-F	@20°C
D.C. RESISTANCE	14-13	@20°C
INDUCTANCE	2-1	50kHz, 100mVAC, Ls
LEAKAGE INDUCTANCE	2-1	tie(3 thru 14), 100kHz, 100mVAC, Ls
DIELECTRIC	S-13	1875VAC, 1 second
DIELECTRIC	6-7	tie(2+3, 8+9), 1875VAC, 1 second
DIELECTRIC	1-14	tie(2+3+8+9, S+13), 3750VAC, 1 second
URNS RATIO	(2-1):(3-5)	8:1, ±2%
URNS RATIO	(2-1):(4-5)	16.67:1, ±2%
URNS RATIO	(2-1):(5-6)	14:1, ±2%
URNS RATIO	(2-1):(8-7)	8:1, ±2%
URNS RATIO	(2-1):(10-9)	14:1, ±2%
URNS RATIO	(2-1):(S-F)	14:1, ±2%
URNS RATIO	(2-1):(14-13)	9.33:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Reinforced insulation for a primary circuit at a working voltage of 450Vpeak, Overvoltage Category II.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tray	Angles: ±1°	TRANSFORMER	750343154
		PKG-1152	Decimals: ±.005 [.13]		
		www.we-online.com/midcom	Fractions: ±1/64		
6B	9/22	SEE REVISION SHEET FOR REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750343154	SPECIFICATION SHEET 1 OF 1
6A	10/17				

