


CUSTOMER TERMINAL	RoHS	LEAD(Pb)--FREE
Sn 96%, Ag 4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25° C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	S-F @20°C	10.5 mohms max.
INDUCTANCE	S-F 100kHz, 100mV, Ls	16.80µH ±12%
SATURATION CURRENT	S-F 20% rolloff from initial	30A

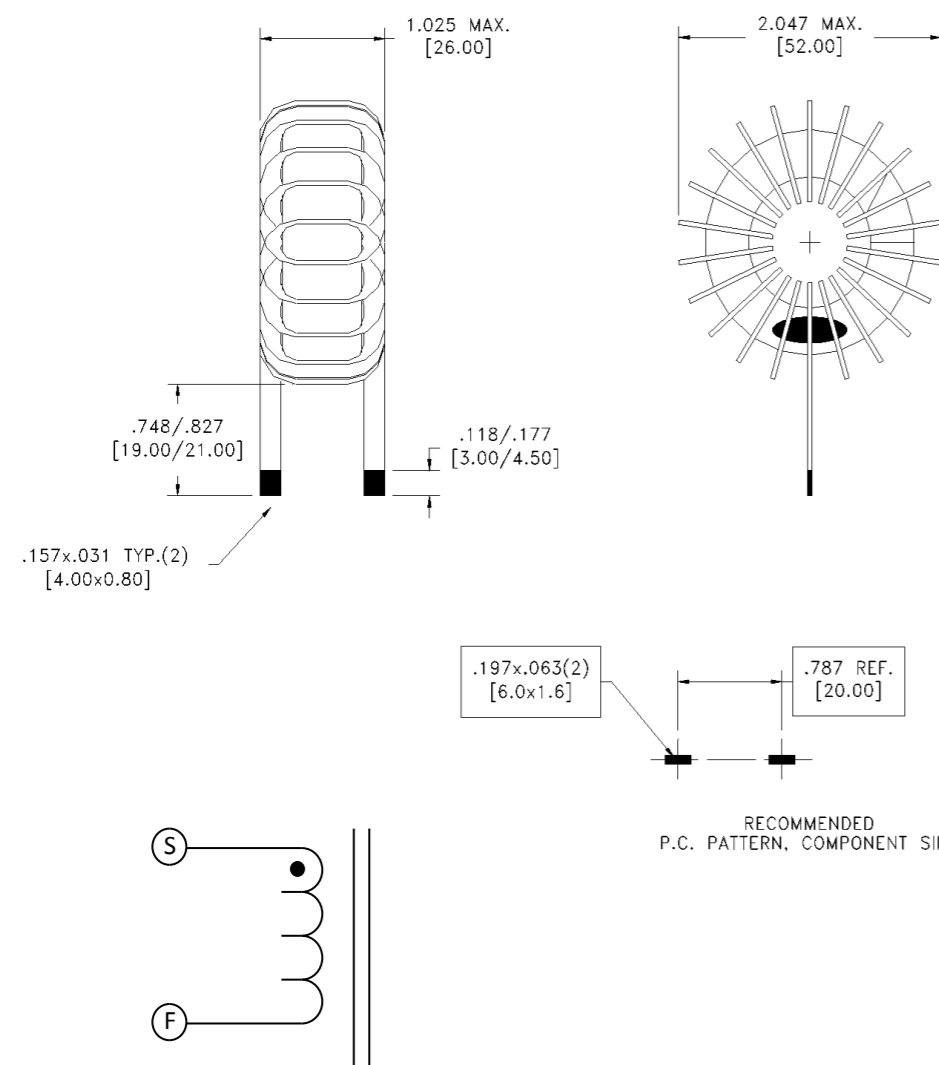

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Rated Current:20A

Saturation Current:30A

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

DFM		Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE INDUCTOR	PART NO. 750344211
DATE		Method: Tray				
ENG	TLI	PKG-TBD				
REV.	00					
DATE	2019-1-17	www.we-online.com/midcom				SPECIFICATION SHEET 1 OF 1