




Step 1.

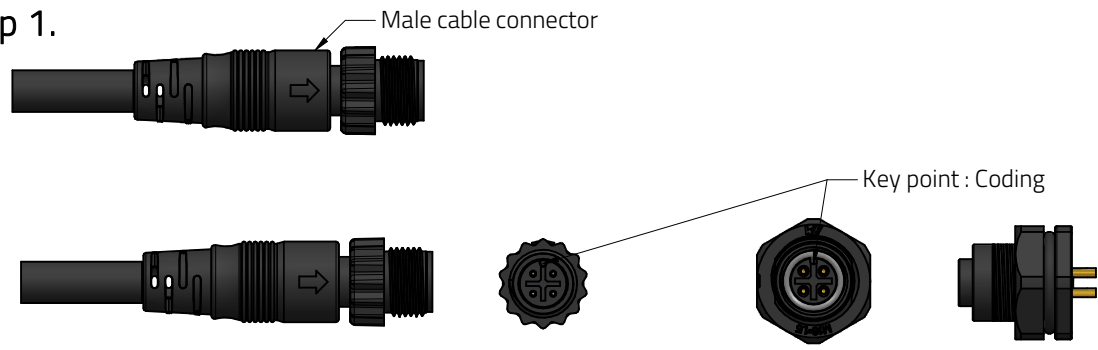



Step 2. Install O-Ring and Shell on Panel

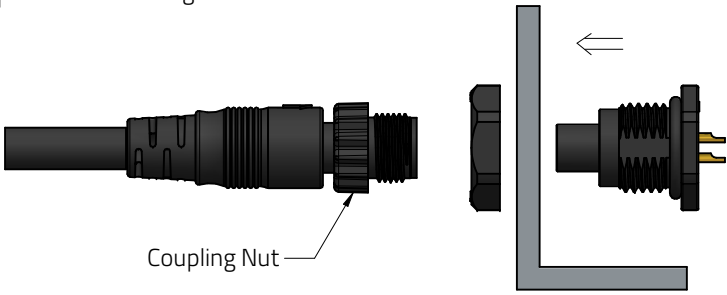

Step 3. Follow the key point instructions to install. Tighten Panel Nut to recommended torque : 10 kgf.cm. Tighten Coupling Nut to recommended tightening torque : 6-8 kgf.cm.

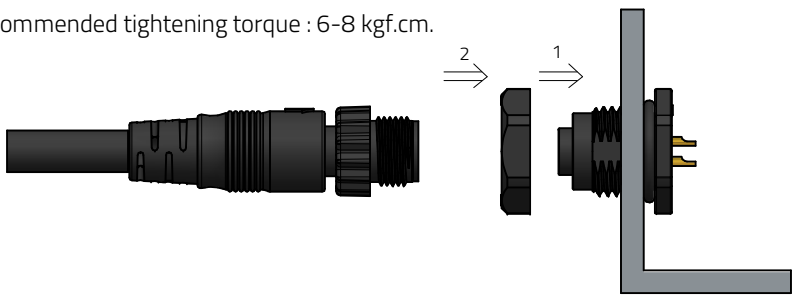

Step 4.

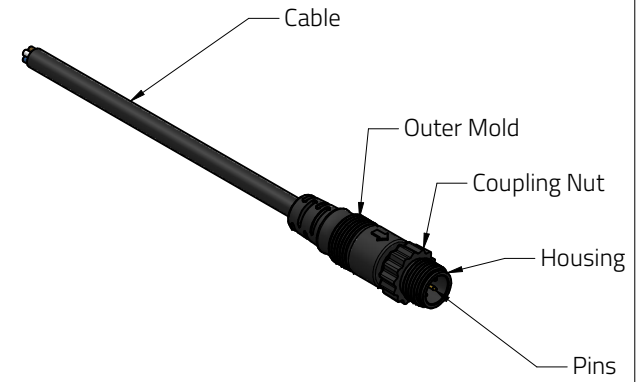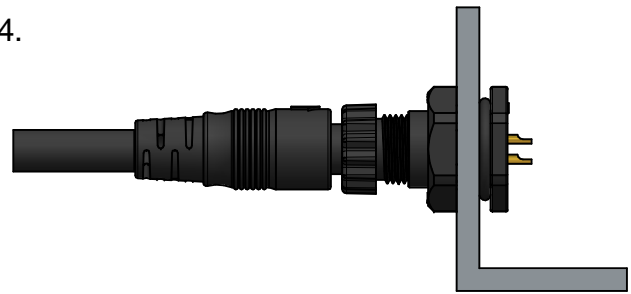

WÜRTH ELEKTRONIK
MORE THAN YOU EXPECT

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions
Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 (0) 79 42 945 - 0
www.we-online.com
eiSos@we-online.com

CREATED MDa	CHECKED CPo		
DESCRIPTION Assembly instructions WR-CIRCM12 : Mating instructions 643 611 120 304			
REVISION 001.001	STATUS Valid	DATE 2022-03-03	BUSINESS UNIT eiCan

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control), train control, ship control, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.