


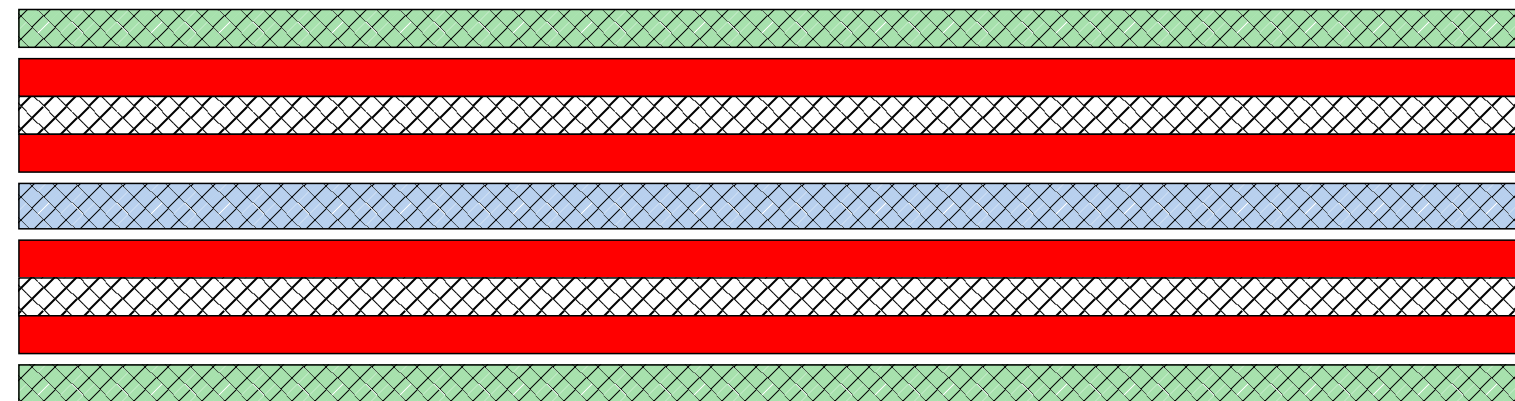
# Rigid

#	Layer	Thickness	Description	Dk	Df	Note
	Top Solder	0.015mm	Soldermask IPC-SM840	3,5	0,028	used on rigid parts
1	Top Side	0.040mm	Starting foil 1/4oz. after plating and processing			
		0.065mm	Prepreg IPC-4101/127/128	3,5	0,011	FR-4.1 filled, halogen free
2	Inner Layer 1	0.017mm	ED Base Copper			
		0.300mm	Core IPC-4101/127/128	4,5	0,011	FR-4.1 filled, halogen free
3	Inner Layer 2	0.017mm	ED Base Copper			
		0.180mm	Prepreg IPC-4101/127/128	3,9	0,011	FR-4.1 filled, halogen free
4	Inner Layer 3	0.017mm	ED Base Copper			
		0.050mm	Flexible core IPC-4204/11	3,4	0,002	Flex Polyimide adhesiveless
5	Inner Layer 4	0.017mm	ED Base Copper			
		0.060mm	IPC-4101/127/128 + IPC-4203/1	3,2	0,011	MIX layer Prepreg + Bondply
6	Inner Layer 5	0.017mm	ED Base Copper			
		0.050mm	Flexible core IPC-4204/11	3,4	0,002	Flex Polyimide adhesiveless
7	Inner Layer 6	0.017mm	ED Base Copper			
		0.180mm	Prepreg IPC-4101/127/128	3,9	0,011	FR-4.1 filled, halogen free
8	Inner Layer 7	0.017mm	ED Base Copper			
		0.300mm	Core IPC-4101/127/128	4,5	0,011	FR-4.1 filled, halogen free
9	Inner Layer 8	0.017mm	ED Base Copper			
		0.065mm	Prepreg IPC-4101/127/128	3,5	0,011	FR-4.1 filled, halogen free
10	Bottom Side	0.040mm	Starting foil 1/4oz. after plating and processing			
	Bottom Solder	0.015mm	Soldermask IPC-SM840	3,5	0,028	used on rigid parts

**Total thickness: 1.496mm**

notes:	<b>FLEX10_3Ri-4F-3Ri_1,50_17_V2.12</b>			
Final copper thickness according to IPC-6013	PCB Thickness Tolerance: rigid ± 10% / flex ± 0,05mm			
IPC 2223 use A "Flex to install"	customer		created	
	pcb name		approved	
Please regard to our sectional design rules: ▶ <a href="http://www.we-online.com">www.we-online.com</a>	engineer		format A4, landscape	
	date			
Template Revision: 02/2021 by Andreas Schilpp / Michael Kress / Werner Öchslen				

# Flex



# Layer	Thickness	Description	Dk	Df	Note
Flex Top Coverlay	0.030mm	PI Coverlay IPC-4203/1	3,6	0,02	Polyimide + bonding film (Acrylic)
4 Inner Layer 3	0.017mm	ED Base Copper			
	0.050mm	Flexible core IPC-4204/11	3,4	0,002	Flex Polyimide adhesiveless
5 Inner Layer 4	0.017mm	ED Base Copper			
	0.060mm	IPC-4101/127/128 + IPC-4203/1	3,2	0,011	MIX layer Prepreg + Bondply
6 Inner Layer 5	0.017mm	ED Base Copper			
	0.050mm	Flexible core IPC-4204/11	3,4	0,002	Flex Polyimide adhesiveless
7 Inner Layer 6	0.017mm	ED Base Copper			
Flex Bottom Coverlay	0.030mm	PI Coverlay IPC-4203/1	3,6	0,02	Polyimide + bonding film (Acrylic)

**Total thickness: 0.288mm**

notes:	<b>FLEX10_3Ri-4F-3Ri_1,50_17_V2.12</b>		
Final copper thickness according to IPC-6013	PCB Thickness Tolerance: rigid ± 10% / flex ± 0,05mm		
IPC 2223 use A "Flex to install"	customer	created	
	pcb name	approved	
Please regard to our sectional design rules: ▶ <a href="http://www.we-online.com">www.we-online.com</a>	engineer	format	A4, landscape
	date		
Template Revision: 02/2021 by Andreas Schilpp / Michael Kress / Werner Öchslen			

