
1		2		3	4	5		
Notes: No. of Positions 64 with the second s			2.54±0.05	В 2.54±0.05 Ф.Ф.Ф.Ф.Ф.Ф.Ф.Ф.Ф.Ф.Ф. Ф.Ф.Ф.Ф.Ф.Ф.Ф.Ф	TECHNICAL CHARA MATERIAL INSULATOR: PBT FLAMABILITY RATIN COLOR: BLACK CONTACT MATERIA CONTACT TATERIA CONTACT TYPE: ST. CONTACT PLATING: QUALITY CLASS: 3 A PITCH: 2.54 MM ENVIRONMENTAL OPERATING TEMPE COMPLIANCE: LEAD	CTERISTICS IG: UL94-V0 L: COPPER ALLOY AMPED GOLD AS PER CECC 75 301-802 RATURE: -40 UP TO 125°C		A
			0 0 0 0 0 0 0 0 0 0 0 0 0 0		CONTACT RESISTAN STANDARD CERTIFIED: E32 SOLDERING	E: 250 VAC ANCE: >1000 MOHM TANDING VOLTAGE: 500 VAC/MN NCE: 20 mOHM MAX		В
2.54 04 M		PIN 2	54±0.05 B A ±0.25 A ±0.25		No. of Positions Dim A Dim B P 6 27.12 5.08 1 8 29.66 7.62 1 10 32.20 10.16 1 12 34.74 12.70 1 14 37.28 15.24 1 16 39.82 17.78 1 20 44.90 22.86 1 24 49.98 27.94 1	No. of ositionsDim ADim B2652.5230.483057.6035.563462.6840.644070.3048.265083.0060.966095.7073.6664100.7878.74		С
N 08-DEC-16 M 24-MAR-16 L 20-OCT-15 K 27-JAN-14 J 19-MAR-13	DRAWING TPK NOTES DWG UPDATE NOTES	AK AK AK QL AR	APPROVAL: GM0	GENERAL TOLERANCE .X = ⁺ /_ 0.2 .XX = ⁺ /_ 0.15 UNIT: MM	WÜRTH ELEKTRONIK DESCRIPTION: 2.54MM MALE BOX HEADE	R WITH LONG LEVER	SIZE	
I 22-FEB-13 H 19-DEC-12 REV DATE	OVERWALL DIM REMOVE UL MARK FILE	QL QL BY		SCALE: SHEET: 1/3 DRAW: MIKE	WERI PART NO: 612 0xx 228 21		A4	

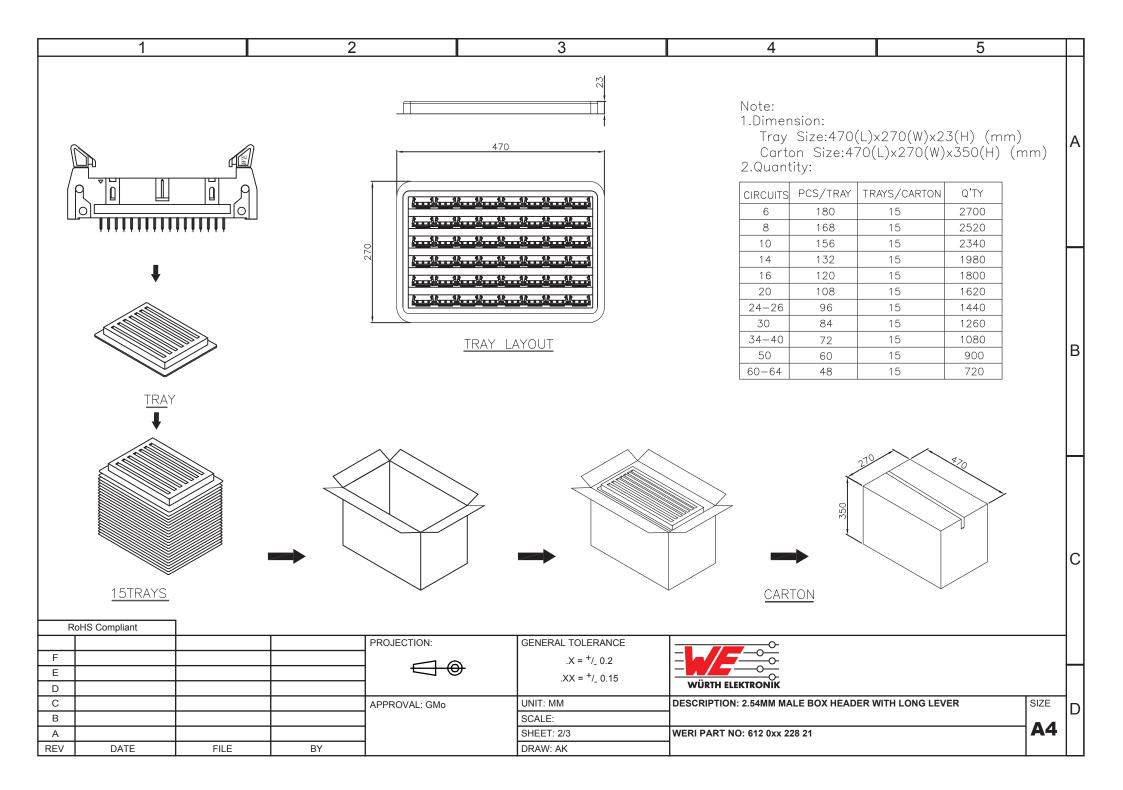

1	2	3	4	5	-
					_

А

В

С

Cautions and Warnings:

This electronic component is designed and developed with the intention for use

in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

R	oHS Compliant							
G				PROJECTION:	GENERAL TOLERANCE	O		1
F					.X = ⁺ /_ 0.2			
E					.XX = ⁺ /_ 0.15			
D						WÜRTH ELEKTRONĪK		
С				APPROVAL: JC	UNIT: MM	DESCRIPTION: DISCLAIMER	SIZE	D
В					SCALE:			Р
A	10-SEP-14	PDF	QL]	SHEET: 3/3	WERI PART NO: DISCLAIMER	A4	
REV	DATE	FILE	BY		DRAW: QL			