	1		2		3		4	5	
	9.5±0.25	0.20 0.50 0.70 0.70	13.50±0.25 B			2.15 B-B	TECHNICAL CHARAC MATERIAL CONTACT MATERIAL: CONTACT TYPE: STAN CONTACT TYPE: STAN QUALITY CLASS: 25 M PITCH: 2.54MM ENVIRONMENTAL	TERISTICS COPPER ALLOY /IPED IN IATING CYCLES ATURE: -40 UP TO 125°C FREE AND ROHS	B
G	oHS Compliant			PROJECTION:	GENERAL TOLERANCI	E			
F					.X = ⁺ /_ 0.2				
E		TEV	A15		.XX = ⁺ /_ 0.15				
D C	07-AUG-18 10-JUL-17	TPK CORRECTION	AK AK		UNIT: MM		DN: 2.54 MM FEMALE CRIMP TE	RMINAI	
В	06-AUG-13	DESCRIPTION	QL	APPROVAL: BBu	SCALE:	DESCRIPTIC	714. 2.34 WIW FEWALE GRIMP TE		יין
A	11-MAR-09	PDF	JP		SHEET: 1/3	WERI PART	NO: 619 101 137 22		A4
		FILE	BY		DRAW: MIKE WU				

|--|

Note :

1. All dimensions meet EIA-481-3 requirements. 2.Material : WH Conductive polystyrene Alloy. 3.Thickness : 0.50±0.05mm. Α


В

С

D

SIZE

A4

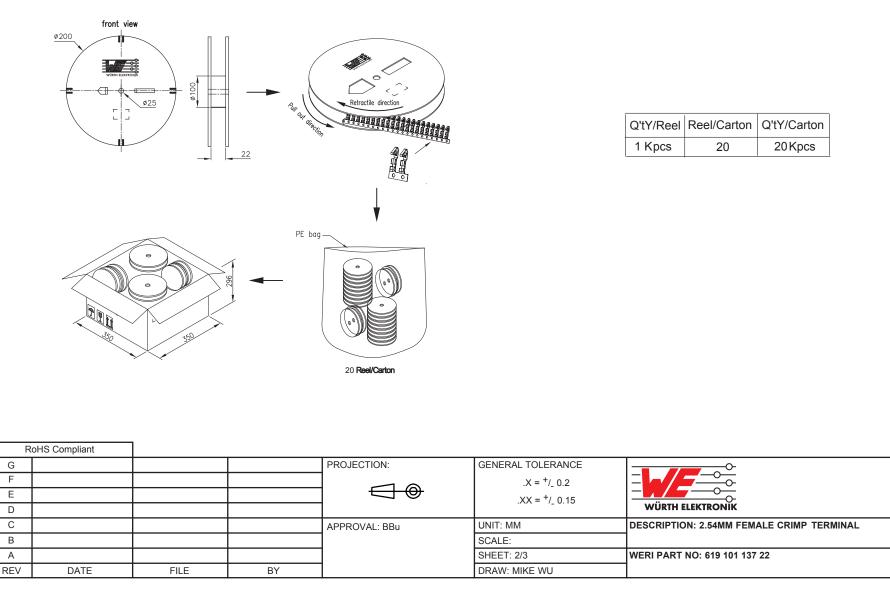

1	2	3	4	5	-
					_

А

В

С

Cautions and Warnings:

This electronic component is designed and developed with the intention for use

in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

R	oHS Compliant							
G				PROJECTION:	GENERAL TOLERANCE			1
F					.X = ⁺ /_ 0.2			
E					.XX = ⁺ /_ 0.15			
D						WÜRTH ELEKTRONĪK		
С				APPROVAL: JC	UNIT: MM	DESCRIPTION: DISCLAIMER	SIZE	D
В					SCALE:			Р
A	10-SEP-14	PDF	QL]	SHEET: 3/3	WERI PART NO: DISCLAIMER	A4	
REV	DATE	FILE	BY		DRAW: QL			