



# **Dimensions: [mm]**




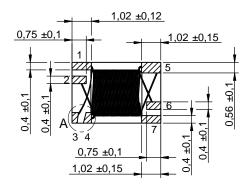










Scale - 5:1


## **Recommended Land Pattern: [mm]**

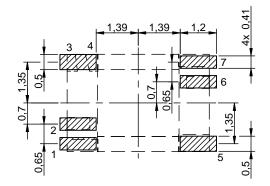

Scale - 8:1

no vias or traces underneath the component

## **Recommended Land Pattern 2: [mm]**

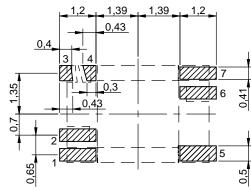


This land pattern is suggested for Power over Data Lines (PoDL) and 10Base-T1 applications.

Scale - 8:1


no vias or traces underneath the component



## **Schematic:**

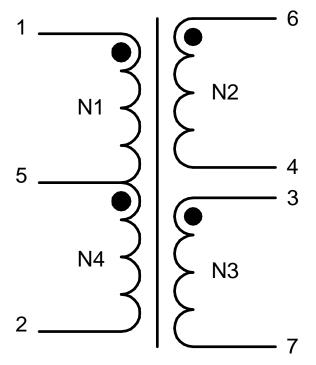

# **Recommended Stencil Design: [mm]**

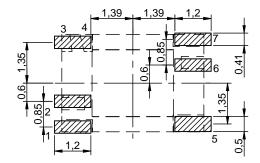

Suggested stencil thickness: 0.08mm

Scale - 8:1

no vias or traces underneath the component

<b>63 6</b>				DATE (YYYY-MM-DD) 2023-12-05	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		<b>)</b> -			
ROHS REACH HALOGEN PREE	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1		ST Supo	er Tiny Sig	nal	ORDER CODE <b>749</b> 3	30000					
ELEKTRONIK MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eiSos	status Valid		- 1	PAGE 2/8			

# **Electrical Properties:**

Properties		Test conditions	Value	Unit	Tol.
Turns Ratio	n	(1-2):(6-7), 3-4 short	1:1		±1%
DC Resistance	R <sub>DC</sub>	100 kHz/ 100 mV	4.5	Ω	max.
Inductance	L	100 kHz/ 100 mV	350	μH	min.
Insertion Loss	IL	1-100 MHz	-1	dB	max.
Return Loss	RL	1-30 MHz @ 100 Ω	-18	dB	min.
Return Loss	RL	30-60 MHz @ 100 Ω	-14		min.
Return Loss	RL	60-80 MHz @ 100 Ω	-12	dB	min.
Return Loss	RL	80-100 MHz @ 100 Ω	-10	dB	min.
Differential to Common Mode Rejection Ratio	DCMR	1-60 MHz	-33	dB	min.
Differential to Common Mode Rejection Ratio	DCMR	60-100 MHz	-33	dB	min.
Insulation Test Voltage		1 min.	1500	V (RMS)	min.

# **General Information:**

It is recommended that the	It is recommended that the temperature of the component does not exceed +105°C under worst case conditions								
Operating Temperature	-40 up to +105 °C								
Storage Conditions (in original packaging)	< 40 °C; < 75 % RH								
Moisture Sensitivity Level (MSL)	1								
	Compliant with IEEE 802.3 standards for 10/100/1G Base-T								
	Compliant with IEEE 802.3 standards for 10/100 Base-T1								
Test conditi	ons of Electrical Properties: +20 °C, 33 % RH if not specified differently								

## **Certification:**


RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]


# **Certification:**


L	Halogen Free	Conform [IEC 61249-2-21]
П	Halogell Hee	0011101111 [ILO 01243-Z-Z1]

		JefL	004.001	2023-12-05	DIN ISO 2768-1m		METHOD —	$\bigcirc \bigcirc$	)-
ROHS REACH HALOGEN CHAPLENT HEER WURTH ELEKTRONIK	COMPLIANT COMPLIANT FREE  Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1		TST Sup former	er Tiny Si	gnal	ORDER COD 749	30000		
MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eiSos	status Valid		9A(	- 1

# Packaging Specification - Tape and Reel: [mm]

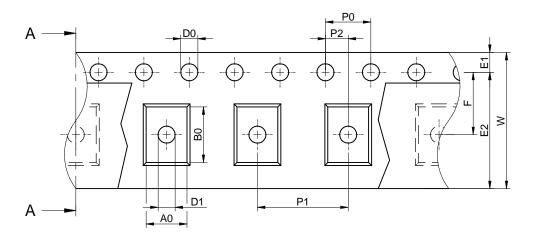





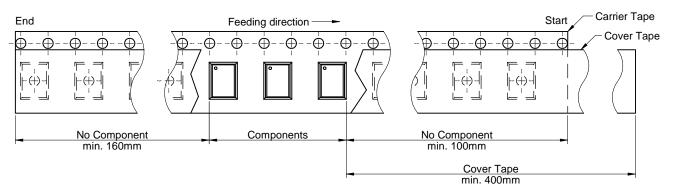

Packaging is referred to the international standard IEC 60286-3:2013

	Таре Туре	A0 (mm)	B0 (mm)	W (mm)	T (mm)	T1 (mm)	T2 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	D0 (mm)	D1 (mm)	E1 (mm)	E2 (mm)	F (mm)	Material	Qty. (pcs.)
Tolerance		typ.	typ.	±0,1	ref.	ref.	typ.	typ.	±0,1	±0,1	±0,05	+0,1/-0,0	min.	±0,1	min.	±0,05		pcs
Value	2a	3,60	4,90	12,00	0,26	0,10	3,15	3,00	4,00	8,00	2,00	1,50	1,50	1,75	10,25	5,50	Polystyrene	2000

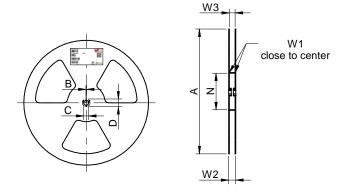


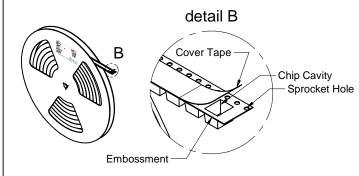

	A (mm)	B (mm)	C (mm)	D (mm)	N (mm)	W1 (mm)	W2 (mm)	W3 (mm)	W3 (mm)	Material
Tolerance	± 2,0	min.	min.	min.	min.	+ 2,0	max.	min.	max.	
Value	330,00	1,50	12,80	20,20	60,00	12,40	18,40	11,90	15,40	Polystyrene



# **Classification Reflow Profile for SMT components:**

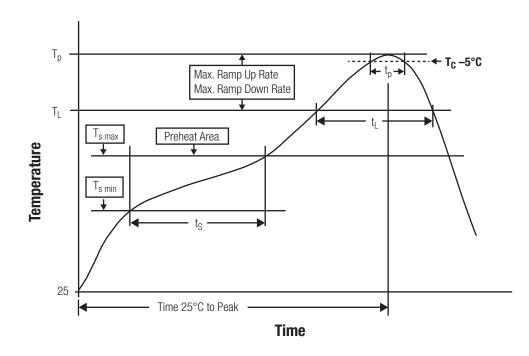

## **Classification Reflow Soldering Profile:**

Profile Feature		Value							
Preheat Temperature Min	T <sub>s min</sub>	150 °C							
Preheat Temperature Max	T <sub>s max</sub>	200 °C							
Preheat Time $t_s$ from $T_{s  min}$ to $T_{s  max}$	t <sub>s</sub>	60 - 120 seconds							
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.							
Liquidous Temperature	T <sub>L</sub>	217 °C							
Time t <sub>L</sub> maintained above T <sub>L</sub>	t <sub>L</sub>	60 - 150 seconds							
Peak package body temperature	T <sub>p</sub>	$T_p \le T_c$ , see Table below							
Time within 5°C of actual peak temperature	t <sub>p</sub>	20 - 30 seconds							
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )		6 °C/ second max.							
Time 25°C to peak temperature		8 minutes max.							

refer to IPC/ JEDEC J-STD-020E

# Package Classification Reflow Temperature (T<sub>c</sub>):

Properties	Volume mm³ <350	Volume mm <sup>3</sup> 350-2000	Volume mm³ >2000	
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C	
PB-Free Assembly I Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C	
PB-Free Assembly I Package Thickness > 2.5 mm	250 °C	245 °C	245 °C	

refer to IPC/ JEDEC J-STD-020E

		JefL	004.001	DATE (YYYY-MM-DD) 2023-12-05	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		<b>)</b> -			
ROMS COMPLIANT HALOCEN HEEE  Würth Elektronik elSos GmbH & Co. KG EM. & Inductive Solutions Max-Eyth-Str. 1  7/4538 Waldenburg		WE-STST Super Tiny Sig Transformer			nal	ORDER CODE 749	30000		Total Control			
MORE THAN YOU EXPECT	Germany Tel. +49 (t) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		1	PAGE 5/8			

## **Further information**

## **Component Libraries:**



3D\_74930000



Altium\_WE-STST (22a)



Downloads\_CADENCE\_WE-STST (21a)



Cadstar\_WE-STST (20a)



Eagle\_WE-STST (20c)



IGS\_74930000



PSpice\_WE-STST (22a)



S-Parameter\_74930000 (21a)



STP\_74930000

## Free Sample Order:

Order free samples of this article directly here!

#### Tutorials:

- One Pair is all you need learn more about Single Pair Ethernet (PDF)
- SN016a Quick Guide for WE-STST designs (PDF)
- Further information available on the website of the Single Pair Ethernet Industrial Partner Network.



# **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-STST of Würth Elektronik ei Sos GmbH & Co. KG:

#### General:

- This electronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the
  authority of the customer. All technical specifications for standard products also apply to customer specific products.

## **Product specific:**

## Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- · All other soldering methods are at the customers' own risk.
- Strong forces which may affect the coplanarity of the components' electrical connection with the PCB (i.e. pins), can damage the part, resulting in avoid of the warranty.

## **Cleaning and Washing:**

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the wire
  insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process may break the wire due to its small diameter. Therefore, we do not recommend using a brush during the PCB cleaning process.

## Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the component. We recommend a
manual inspection after potting to avoid these effects.


## **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- · Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.

## **Handling:**

- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals may result in audible noise due to the magnetostrictive material properties.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

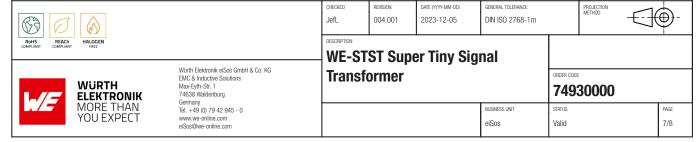

# **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

## 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

## 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

## 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

## 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

