

## Absolute Maximum Ratings (Ambient Temperature 25°C):

Properties		Value	Unit
Power Dissipation	P <sub>Diss</sub>	380	mW
Supply Voltage	V <sub>Supply</sub>	5.5	V
IC Output Current	I <sub>F,IC</sub>	23	mA
ESD Threshold/ Human Body Model	V <sub>ESD HBM</sub>	2000	V
Junction Temperature LED	Tj	115	°C

## **Packaging Properties:**

	AllnGaP + InGaN
Emitting Color	Red & Green & Blue
Packaging	PLCC6 Top view
Lens Color	Diffused
Plastic Housing Color	White

## **General Information:**

Operating Temperature	-40 °C up to +85 °C					
Storage Conditions (in original packaging)	< 40 °C;< 90 % RH					
Storage Conditions (for single parts)	-40 °C up to +100 °C					
Moisture Sensitivity Level (MSL)	5a					

Scale - 10:1

Scale - 10:1

3 🕖 👩 🐼 📩	CHECKED	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m	P		$\oplus$
HS REACH HALOGEN SAFETY			egrated Co				
Würth Elektronik eißes GmbH & Co. KG ELEKTRONIK MORE THAN	withir	1 LED			ORDER CODE	121320437	
MORE THAN YOU EXPECT Tel.+49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE SMT PLCC6	IC RGB LED		BUSINESS UNIT eiPal	status Valid		page 1/13

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

# Recommended Land Pattern: [mm]

## **Optical Properties:**

Properties		Test conditions	Va	lue	Unit
Properties		lest conditions	min.	typ.	
Peak Wavelength (Red)	λ <sub>Peak R</sub>	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{xFFFF00000000} \\ \text{C} = 100\text{nF} \end{array}$		630	nm
Peak Wavelength (Green)	$\lambda_{Peak\ G}$	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{x}0000\text{FFFF0000} \\ \text{C} = 100\text{nF} \end{array}$		520	nm
Peak Wavelength (Blue)	λ <sub>Peak B</sub>	$\label{eq:VD} \begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{x}00000000\text{FFFF} \\ \text{C} = 100\text{nF} \end{array}$		465	nm
Dominant Wavelength (Red)	$\lambda_{Dom R}$	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{xFFFF00000000} \\ \text{C} = 100\text{nF} \end{array}$		625	nm
Dominant Wavelength (Green)	$\lambda_{Dom G}$	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{x}0000\text{FFFF0000} \\ \text{C} = 100\text{nF} \end{array}$		525	nm
Dominant Wavelength (Blue)	λ <sub>Dom B</sub>	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{x}00000000\text{FFFF} \\ \text{C} = 100\text{nF} \end{array}$		470	nm
Luminous Intensity (Red)	I <sub>V R</sub>	$\begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V} \\ \text{Bit Code: } 0\text{xFFFF00000000} \\ \text{C} = 100\text{nF} \end{array}$	400	600	mcd
Luminous Intensity (Green)	I <sub>V G</sub>	VDD = 5V, VSS = 0V Bit Code: 0x0000FFFF0000 C = 100nF	700	1000	mcd
Luminous Intensity (Blue)	I <sub>V B</sub>	$\label{eq:VDD} \begin{array}{l} \text{VDD} = 5\text{V}, \text{VSS} = 0\text{V}\\ \text{Bit Code: } 0\text{x}00000000\text{FFFF}\\ \text{C} = 100\text{nF} \end{array}$	160	240	mcd
Spectral Bandwidth (Red)	Δλ R	VDD = 5V, VSS = 0V Bit Code: 0xFFFF00000000 C = 100nF		14	nm
Spectral Bandwidth (Green)	Δλ G	VDD = 5V, VSS = 0V Bit Code: 0x0000FFFF0000 C = 100nF		28	nm
Spectral Bandwidth (Blue)	Δλ Β	VDD = 5V, VSS = 0V Bit Code: 0x00000000FFFF C = 100nF		18	nm
Viewing Angle Phi 0°	2θ <sub>50%</sub>			110	0

## **Electrical Properties:**

Properties			Value						
Fiopernes		min.	typ.	max.	Unit				
Operating supply voltage	V <sub>DD</sub>	4.2	5	5.5	V				
Digital input voltage - high-level	V <sub>IH</sub>	0.7 * VDD		VDD					
Digital input voltage - low-level	V <sub>IL</sub>			0.3 * VDD					
Digital output voltage - high- level	V <sub>OH</sub>	0.9 * VDD							
Digital output voltage - low-level	V <sub>OL</sub>			0.1 * VDD					
IC Output Current	I <sub>F,IC</sub>		20	23	mA				
IC Standby Current	I <sub>DD,OFF</sub>		1		mA				

## **Certification:**


RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]
IP Class	IPX7 IEC 60598-1:2020 & EN IEC 60598-1:2021+A11:2022
Photobiological Safety	Low Risk [ IEC 62471:2006 ]


(5) (7) (8) (5) (5)		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	<b>•</b> -
ROHS REACH HALOGEN SAFETY				grated Co	ntroller			
Würth Elektronik elösa GmbH & Co. KG EMC & Laductive Solutions WÜRTH Max-Eyth-Str. 1 ELEKTRONIK 74638 Waldenburg		within	LED			ORDER CODE	2121320437	
MORE THAN YOU EXPECT	Germany Tel. +40 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE	RGB LED		BUSINESS UNIT eiPal	status Valid		PAGE 2/13

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information unternoted for use in areas such as military, aerospace, availation, nuclear controls, submarine, transportation signal, disaster prevention, medical, public information network etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicual transport. Wurth Elektronik elSos GmbH & Co KG must be information.

**Schematic:** 


## **Switching Characteristics:**

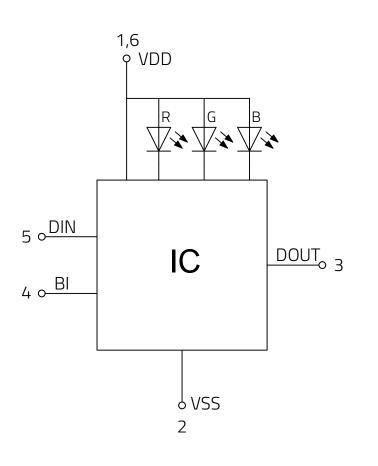

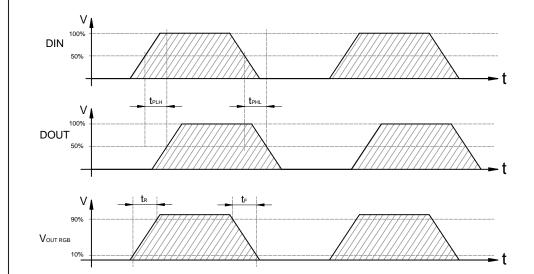

Properties	Symbol Test conditions			Unit		
Properties			Min.	Тур.	Max.	Unit
Frequency of the PWM	fPWM		0.5	0.6	0.7	kHz
Transmission Delay Low to High	tPLH	DIN to DOUT			500	ns
Transmission Delay High to Low	tPHL	DIN to DOUT			500	ns
Rise Time	tR			250		ns
Fall Time	tF			100		ns


BI: Bypass

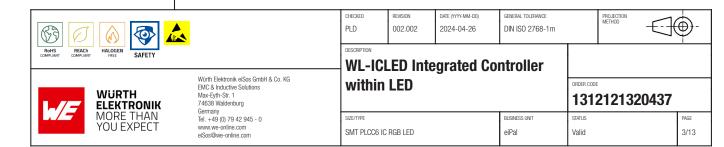

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Drementies	Symbol Test conditions			Unit		
Properties			Min.	Тур.	Max.	Unit
Bit Period	т		1.0	1.2	1.4	μs
Bit 0 High Pulse	тон		0.22	0.3	0.38	μs
Bit 0 Low Pulse	TOL		0.82	0.9	0.98	μs
Bit 1 High Pulse	T1H		0.82	0.9	0.98	μs
Bit 1 Low Pulse	T1L		0.22	0.3	0.38	μs
Reset Pulse	Treset		50			μs

## **Sequence Chart:**

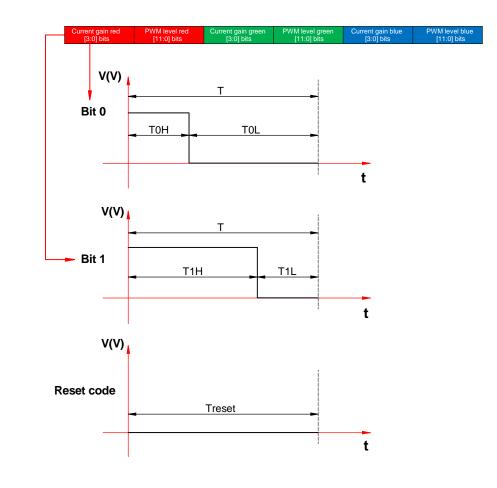

#### Treset is not to scale. The 48-bit data is formed by red, green and blue data, each with 12-bit PWM and 4-bit current level selector.


		CHECKED	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	<b>—</b>
Rots COMPLIANT COMPLIANT HALOGEN SAFETY WURTH	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1	WL-IC within		grated Co	ntroller		2121320437	
<b>ELEKTRONIK</b> MORE THAN YOU EXPECT	74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE SMT PLCC6 IC	RGB LED		BUSINESS UNIT eiPal	STATUS Valid	2121320437	PAGE 4/13

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## **Data Transmission Method:**

		48	3-bit data comp	osition					
		Current gain red [3:0] bits	PWM le [11:0		Current gain greer [3:0] bits		vel green )] bits	Current gain blue [3:0] bits	PWM level blue [11:0] bits
D1 _	First 48 bits	Second 48 bits	"N" 48 bits	]	First 48 bits	Second 48 bits	"N" 48	bits	
D2		Second 48 bits	"N" 48 bits	-	[	Second 48 bits	"N" 48	bits	
: D "N"			"N" 48 bits	-			"N" 48	bits	
_			•	Reset code >50 μs	2			<u>.</u>	

## **Typical Application Circuit:**

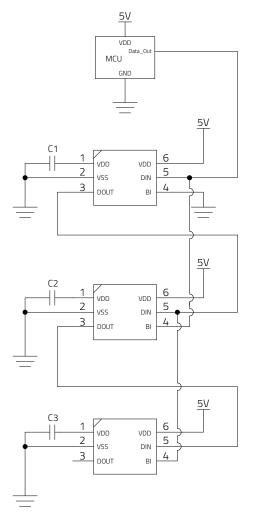



The information of each LED is transmitted with Most Significant Bit (MSB) first.

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT	Mar-Eylin-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE			BUSINESS UNIT	1312 STATUS Valid	2121320437	PAGE 5/13		
		WL-ICLED Integrated Controller within LED					ORDER CODE			
(3) √ (3) (3) (3) (3) (3) (3) (3) (3) (3) (3)		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	<b>_</b> -		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

**Viewing Angle:** 

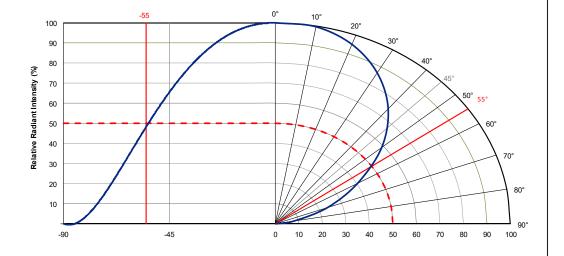

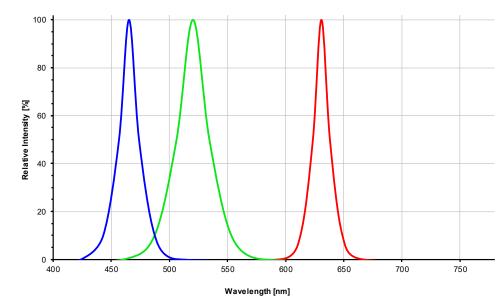


CHECKED REVISION DATE (YYYY-MM-DD) GENERAL TOLERANCE PROJECTION METHOD Ð 0 GÐ PLD 002.002 2024-04-26 DIN ISO 2768-1m ( )DESCRIPTION RoHS COMPLIANT REACh COMPLIANT HALOGEN SAFETY **WL-ICLED Integrated Controller** Würth Elektronik eiSos GmbH & Co. KG within LED ORDER CODE EMC & Inductive Solutions WURTH ELEKTRONIK MORE THAN YOU EXPECT Max-Eyth-Str. 1 1312121320437 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com SIZE/TYPE STATUS PAGE BUSINESS UNIT SMT PLCC6 IC RGB LED eiPal Valid 6/13 eiSos@we-online.com

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Spectral:

## Typical luminous intensity vs. Bit Code:

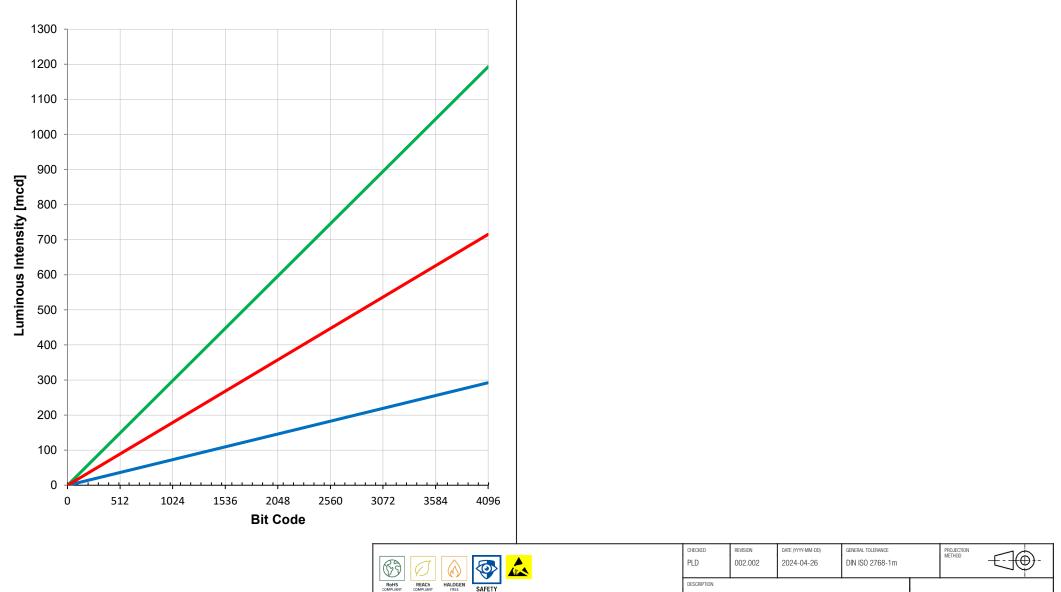

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Würth Elektronik eiSos GmbH & Co. KG

EMC & Inductive Solutions

Tel. +49 (0) 79 42 945 - 0 www.we-online.com

eiSos@we-online.com

Max-Eyth-Str. 1

74638 Waldenburg Germany

**WL-ICLED Integrated Controller** 

ORDER CODE

STATUS

Valid

BUSINESS UNIT

eiPal

1312121320437

PAGE 7/13

within LED


SMT PLCC6 IC RGB LED

SIZE/TYPE

SAFETY

WURTH ELEKTRONIK

MORE THAN YOU EXPECT

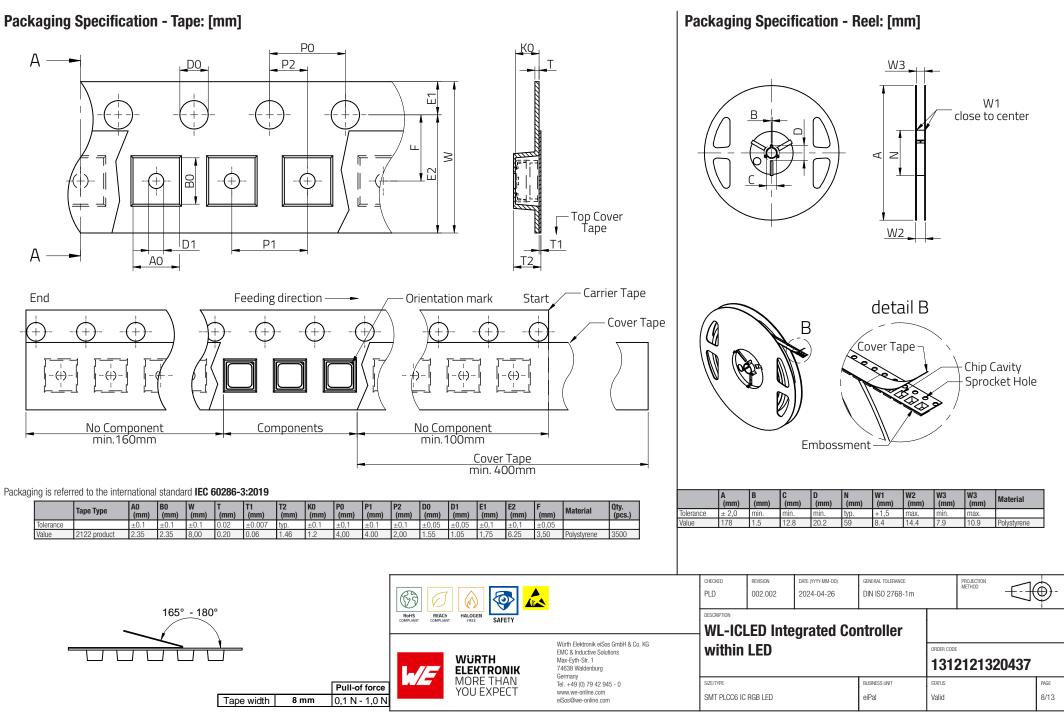

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

## **Classification Reflow Profile for SMT components:**



## **Classification Reflow Soldering Profile:**

Profile Feature		Value
Preheat Temperature Min	T <sub>s min</sub>	150 °C
Preheat Temperature Max	T <sub>s max</sub>	200 °C
Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$	t <sub>s</sub>	max. 60 - 120 seconds
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time $\mathbf{t}_{\mathrm{L}}$ maintained above $\mathbf{T}_{\mathrm{L}}$	tL	max. 60 seconds
Peak package body temperature	Т <sub>р</sub>	$T_p \leq T_c$ , see Table below
Time within 5°C of actual peak temperature	t p	max. 10 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )		6 °C/ second max.
Time 25°C to peak temperature		max. 220 seconds

refer to IPC/ JEDEC J-STD-020E

## Package Classification Reflow Temperature (T<sub>c</sub>):

Properties	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000				
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C				
PB-Free Assembly I Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C				
PB-Free Assembly   Package Thickness > 2.5 mm	250 °C	245 °C	245 °C				
Applied cycles	2 cycles max.						


refer to IPC/ JEDEC J-STD-020E

		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	]@-	
ROHS REACH HALOGEN SAFETY WURTH Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions WURTH ELEKTRONIK Max-Eyth-Str. 1 74638 Waldenburg		WL-ICLED Integrated Controller within LED					ORDER CODE 1312121320437		
MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE	RGB LED		BUSINESS UNIT eiPal	status Valid		PAGE 9/13	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

## **Further information**

#### **Component Libraries:**



Cadence\_WL-ICLED (24a)

Eagle\_WL-ICLED (24a)

Download\_IGS\_1312121320437

Download\_STP\_1312121320437

### Free Sample Order:

Order free samples of this article directly here!

	B 0 6 🐼 🛦		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		€-
	Reifs COMPUMER REACH		WL-ICLED Integrated Controller within LED					ORDER CODE 1312121320437		
			Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	SIZE/TYPE SMT PLCC6 IC	RGB LED		BUSINESS UNIT eiPal	STATUS Valid	212132	20437

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## **Cautions and Warnings:**

## The following conditions apply to all goods within the product series of Optoelectronic Components of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

- This optoelectronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Optoelectronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer
- The optoelectronic component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.
- Unless Würth Elektroik has given its express consent, the customer is under no circumstances entitled to reverse engineer, disassemble
  or otherwise attempt to extract knowledge or design information from the optoelectronic component

#### **Product specific:**

#### Soldering

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- The soldering pad pattern shown above is a general recommendation for the easy assembly of optoelectronic component. If a high degree of precision is required for the selected application (i.e. high density assembly), the customer must ensure that the soldering pad pattern is optimized accordingly.

#### **Cleaning and Washing:**

• Washing agents used during the production to clean the customer application might damage or change the characteristics of the optoelectronic component body, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

• Using a brush during the cleaning process may break the optoelectronic component body. Therefore, we do not recommend using a brush during the PCB cleaning process.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the optoelectronic component body, pins or termination. Expansion could
damage the components. We recommend a manual inspection after potting to avoid these effects.

#### **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the optoelectronic component to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is
  also recommended to return the optoelectronic component to the original moisture proof bag and reseal the moisture proof bag again.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging:

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current, will void the warranty.
- The product design may influence the automatic optical inspection.
- Certain optoelectronic component surfaces consist of soft material. Pressure on the top surface has to be handled carefully to prevent
  negative influence to the function and reliability of the optoelectronic components.
- ESD prevention methods need to be applied for manual handling and processing by machinery.
- Resistors for protection are obligatory.
- · Luminaires in operation may harm human vision or skin on a photo-biological level. Therefore direct light impact shall be avoided.
- In addition to optoelectronic components testing, products incorporating these devices have to comply with the safety precautions given in IEC 60825-1, IEC 62471 and IEC 62778
- Please be aware that Products provided in bulk packaging may get bent and might lead to derivations from the mechanical
  manufacturing tolerances mentioned in our datasheet, which is not considered to be a material defect. Please be aware that Products
  provided in bulk packaging may get bent and might lead to derivations from the mechanical manufacturing tolerances mentioned in our
  datasheet, which is not considered to be a material defect.

		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	general tolerance DIN ISO 2768-1m	PF		⊕-
			.ED Inte	grated Co				
WÜRTH ELEKTRONIK MORE THAN	Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	within	LED			ORDER CODE	121320437	
MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE SMT PLCC6 IC	RGB LED		BUSINESS UNIT eiPal	status Valid		PAGE 11/13

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.

#### **Technical specification:**

- The typical and/or calculated values and graphics of technical parameters can only reflect statistical figures. The actual parameters of
  each single product, may differ from the typical and/or calculated values or the typical characteristic line.
- On each reel, only one bin is sorted and taped. The bin is defined on intensity, chromaticity coordinate or wavelength and forward voltage.
- In order to ensure highest availability, the reel binning of standard deliveries can vary. A single bin cannot be ordered. Please contact us
  in advance, if you need a particular bin sorting before placing your order.
- Test conditions are measured at the typical current with pulse duration < 30ms.
- Optical properties are measured according the CIE 127:2007 standard.
- Wavelength tolerance under measurement conditions ± 2nm.
- Optical intensity tolerance under measurement conditions ±15%.
- Forward voltage tolerance under measurement conditions  $\pm$  0.1V.
- CCT tolerance of x and y coordinate of  $\pm$  0.01 and CRI tolerance of  $\pm$  2 is allowed.

In the characteristics curves, all values given in dotted lines may show a higher deviation than the parameters mentioned above.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

The customer has the sole responsibility to ensure that he uses the latest version of this datasheet, which is available on Würth Elektronik's homepage. Unless otherwise agreed in writing (i.e. customer specific specification), changes to the content of this datasheet may occur without notice, provided that the changes do not have a significant effect on the usability of the optoelectronic components

		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	GENERAL TOLERANCE DIN ISO 2768-1 m		PROJECTION METHOD	
COMPLIANT COMPLIANT FREE SAFETY		WL-ICLED Integrated Controller					•	
Würth Elektronik eißas GmbH & Co. KG EMC 2. Inductive Solutions WÜRTH Max-Eyth-St. 1 ELEKTRONIK 74638 Waldenburg								
	EMC & Inductive Solutions Max-Eyth-Str. 1	within	LED			ORDER CODE	21213204	137

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation, nuclear control, submarine, transportation, signal, disaster prevention, medical, public information network etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial clicurus that manance.

## **Important Notes**

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

		CHECKED PLD	REVISION 002.002	DATE (YYYY-MM-DD) 2024-04-26	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		€-
COMPLIANT COMPLIANT TREE SAFETY		WL-ICLED Integrated Controller							
Würt Elektronik elöse Gmbł & Co. KG EMC & Inductive Solutions Mac-Eyth-Sir. 1 74638 Waldenburg Gerrrany			LED			ORDER CODE	21213204	137	
MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE	RGB LED		BUSINESS UNIT eiPal	status Valid		- 1	PAGE 13/13

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.