



### **Dimensions: [mm]**










1,3 ±0,1

### **Recommended Hole Pattern: [mm]**



Scale - 3:1


### **General Properties:**

Туре	Optocoupler Triac Random phase
Input	DC
Package	DIP 6, Standard
Plastic Housing Color	Black

#### **Certification:**

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]
VDE Approval	40051484 [DIN EN IEC 60747-5-5 (VDE 0884-5):2021-10; EN IEC 60747-5-5:2020]
cULus Approval	E513104 [UL 1577]
CQC Approval	23001411305 [GB 4943.1-2022]

#### **Schematic:**

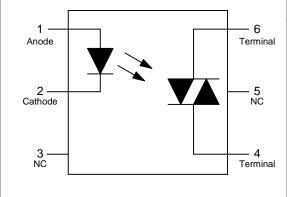

#### **General Information:**

CHECKED

REVISION

DATE (YYYY-MM-DD)

Operating Temperature	-40 °C up to +100 °C
Storage Conditions (for single parts)	-55 °C up to +125 °C
Storage Conditions (in original packaging)	< 40 °C ; < 75 % rH
Moisture Sensitivity Level (MSL)	1

#### **Product Marking:**

Marking	3012
Marking - Date Code	YWW

ROHS REACH COMPLIANT HALOGEN FREE	DVE c <b>PU</b> us		œc
-----------------------------------	--------------------	--	----



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com

eiSos@we-online.com

GENERAL TOLERANCE

PROJECTION METHOD

# Absolute Maximum Ratings Input Properties (Ambient Temperature 25 °C unless otherwise specified):

Properties		Value	Unit
Forward Current	I <sub>F max.</sub>	60	mA
Input Power Dissipation	P <sub>I</sub>	100	mW
Reverse Voltage	V <sub>REV</sub>	6	V
Junction Temperature	TJ	125	°C

# Absolute Maximum Ratings Output Properties: (Ambient Temperature 25 °C unless otherwise specified):

Properties		Test conditions	Value	Unit
Output Power Dissipation	P <sub>0</sub>		300	mW
Repetitive peak off-state voltage	$V_{DRM}$		250	V
Peak non-repetitive surge current	I <sub>TSM</sub>	PW = 100μs, 120pps	1	А

#### **Absolute Maximum Ratings Common Properties:**

Properties		Test conditions	Value	Unit
Power Dissipation 1)	P <sub>Diss</sub>		400	mW
Isolation Voltage	V <sub>ISO</sub>	AC for 1 Minute, RH 40~60 %	5000	V (RMS)
Soldering Temperature			260	°C

<sup>1)</sup> Total power dissipation of the whole component

#### **Electrical & Optical Input Properties:**


Properties		Test conditions	Value		
		Test continuous	typ.	max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	1.24	1.4	V
Reverse Current	I <sub>REV</sub>	V <sub>REV</sub> = 6 V		10	μА
Input Capacitance	C <sub>in</sub>	V = 0 V f = 1 kHz	8.5		pF

#### **Electrical & Optical Output Properties:**

Properties	Test conditions		Value			Unit
rioperues		iest conditions	min.	typ.	max.	UIIIL
Peak on-state voltage	$V_{TM}$	ITM = 100mA		1.58	2.5	V
Peak off-state current	I <sub>DRM</sub>	$VDRM = rated VDRM$ $I_F=0$			100	nA
Critical rate of rise of off-state voltage	dv/dt	V <sub>peak</sub> = rated VDRM	1000		1000	V/µs


#### **Electrical & Optical Transfer Properties:**

Dranartice		Test conditions	Value			
Properties		lest conditions	min.	typ.	max.	Unit
Floating Capacitance	C <sub>IO</sub>	V = 0 V f = 1 MHz		0.4	1	pF
Isolation Resistance	R <sub>ISO</sub>	DC = 500 V 40~60 % R.H.	1	100		ΤΩ
LED Trigger current	I <sub>FT</sub>	Terminal Voltage = 3 V ITM = 100 mA			10	mA
Holding Current	I <sub>H</sub>			257		μΑ

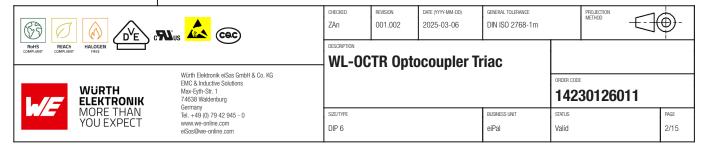



### **Derating Curve:**

# Forward Current vs. Ambient Temperature On-State Terminal Current vs. Ambient Temperature

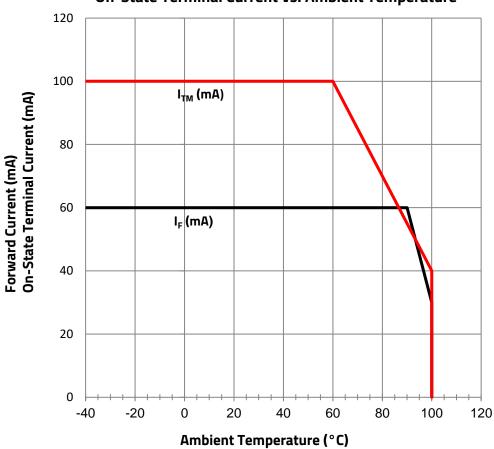


### **Peak Off-State Terminal Current vs. Ambient Temperature:**

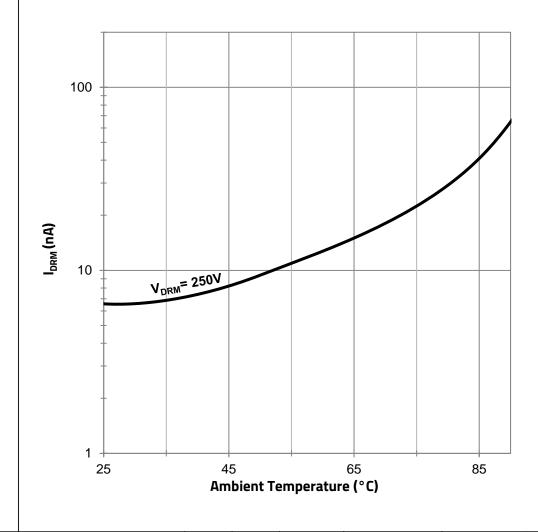


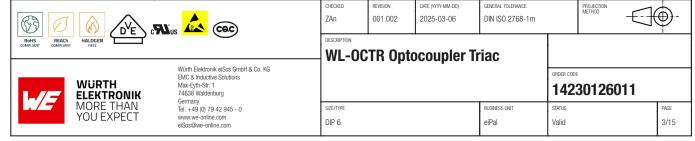


### **Normalized Off-State Terminal Voltage vs. Ambient Temperature:**

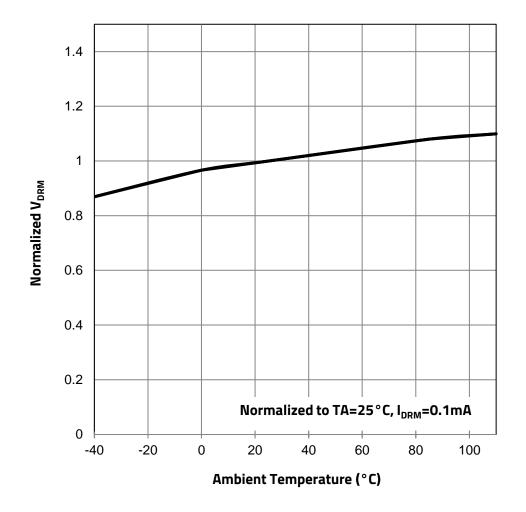


### **Peak On-State Terminal Voltage vs. Ambient Temperature:**

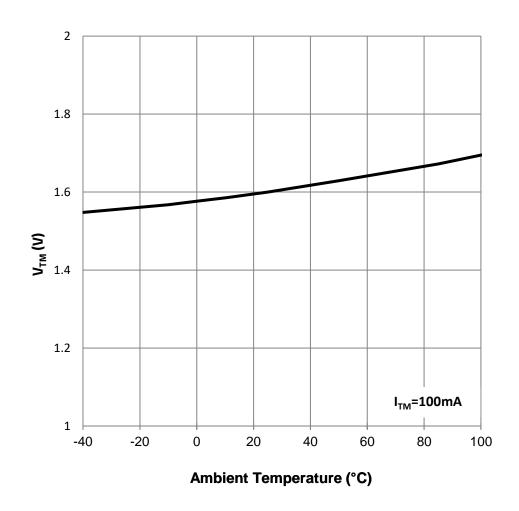


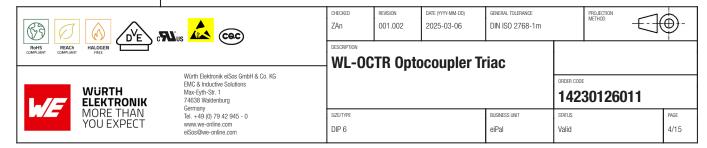


### **Normalized Trigger Current vs. Ambient Temperature:**

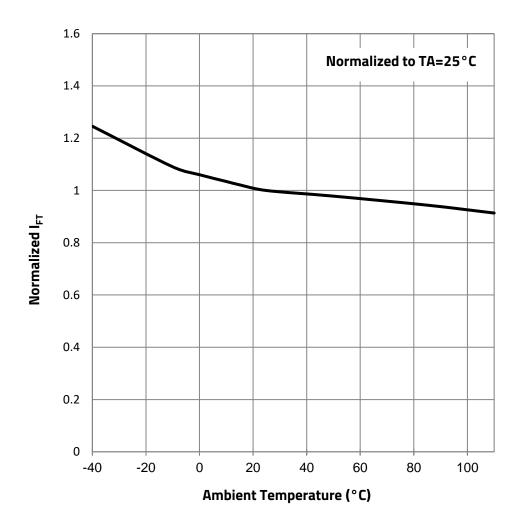


### **Holding Current vs. Ambient Temperature:**

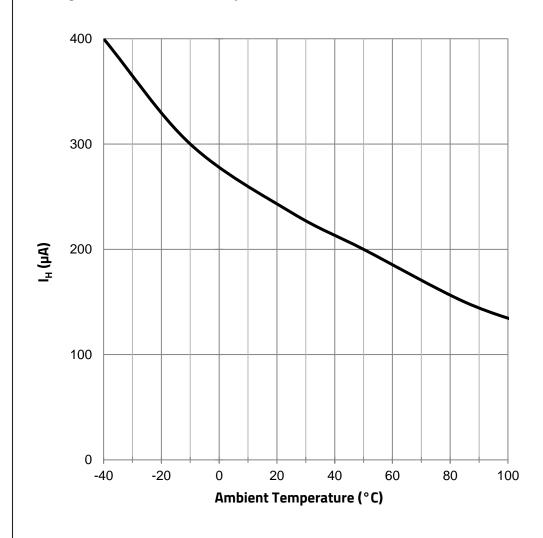


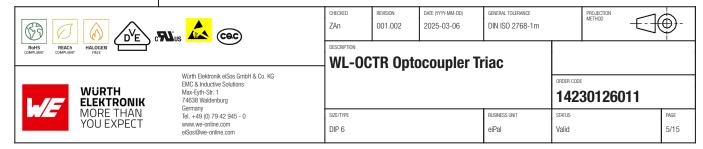


### **Turn On Time vs. Ambient Temperature:**

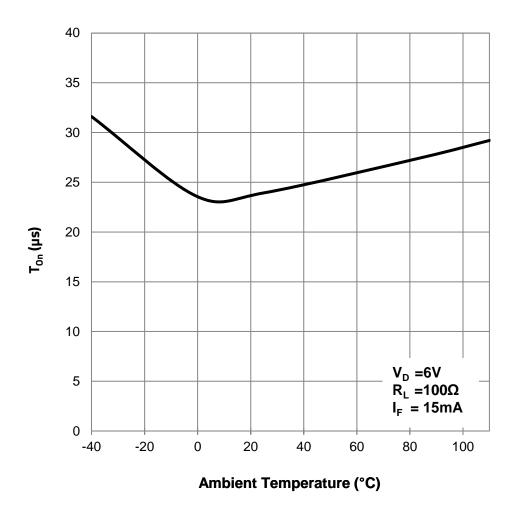


### **Forward Current vs. Forward Voltage:**

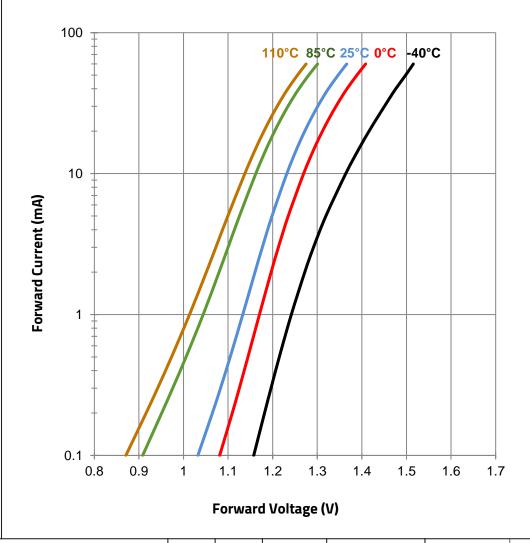


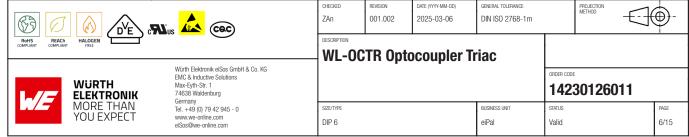


### **On-State Terminal Voltage vs. On-State Terminal Current:**

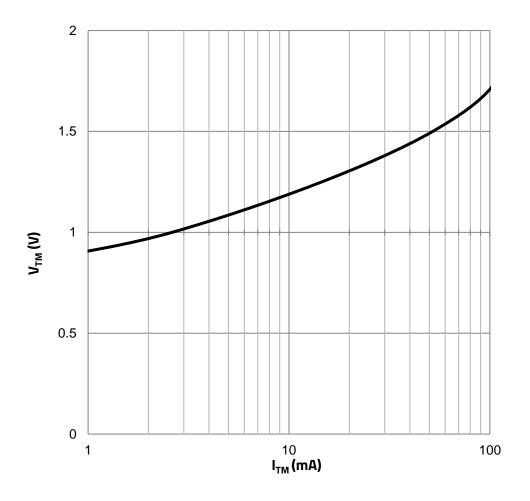



### **Normalized Trigger Current vs. LED Trigger Pulse Width:**

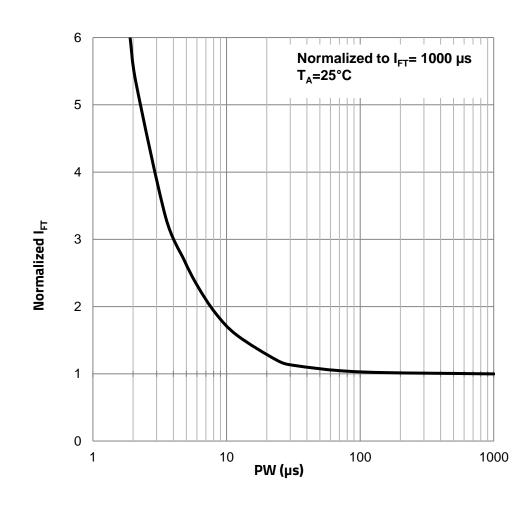

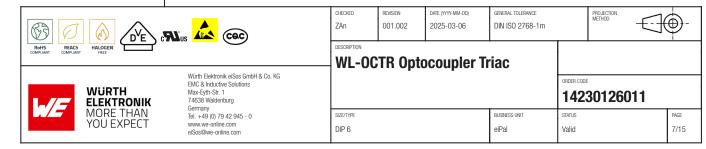


#### **Turn on Time vs. Forward Current:**

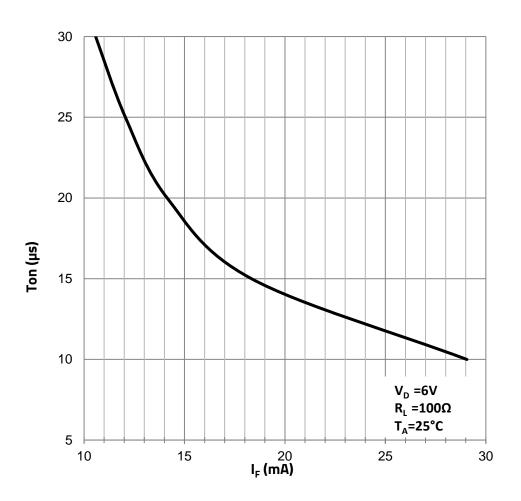

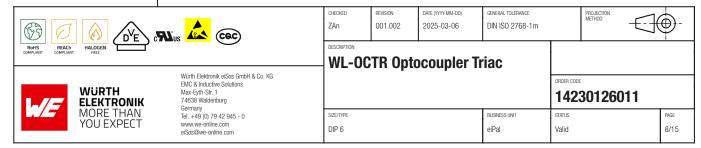



### Packaging Specification - Tube: [mm]




	L (mm)	W (mm)	H (mm)	No. of Locking Device (pcs.)	Qty. (pcs.)	Material
Tolerance	typ.	typ.	typ.			
Value	500.00	12.30	10.00	2	65	PS

### Packaging Specification - Tube: [mm]

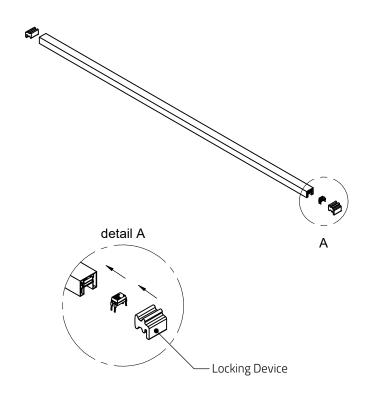

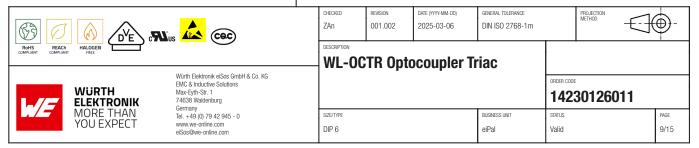


### Packaging Specification - Tube and Carton: [mm]

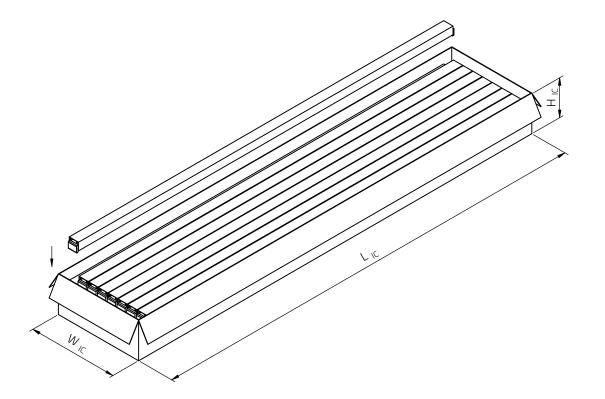


	L <sub>IC</sub> (mm)	W <sub>IC</sub> (mm)	H <sub>IC</sub> (mm)	No. of Tube (pcs.)	Qty. (pcs.)
Tolerance	typ.	typ.	typ.		
Value	525 00	107 00	47.00	32	2080

### Packaging Specification - Outer Carton: [mm]

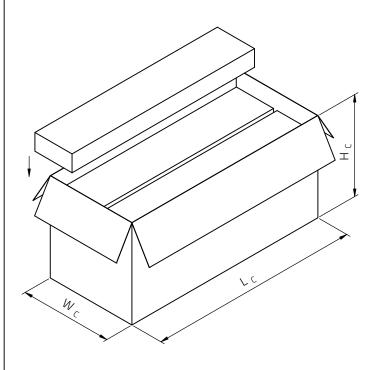

		L <sub>C</sub> (mm)	W <sub>C</sub> (mm)	H <sub>C</sub> (mm)	No. of Inner Carton (pcs.)	Qty. (pcs.)	Material
Tole	erance	typ.	typ.	typ.			
1/21	luα	535.00	235.00	255.00	10	20800	Panor

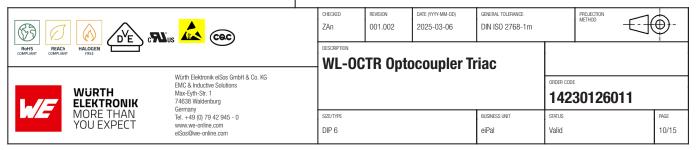

### **Classification Wave Soldering Profile:**



### **Classification Wave Soldering Profile:**

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly		
Preheat Temperature Min		100 °C	100 °C		
Preheat Temperature Typical	T <sub>s typical</sub>	120 °C	120 °C		
Preheat Temperature Max	T <sub>s max</sub>	130 °C	130 °C		
Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$	t <sub>s</sub>	70 seconds	70 seconds		
Ramp-up Rate $\Delta$ Temperature from $\mathbf{T}_{s~typical}$ to $\mathbf{T}_{p}$	ΔΤ	150 °C max.	150 °C max.		
Peak Temperature	T <sub>p</sub>	245 °C - 260 °C	235 °C - 260 °C		
Time of actual peak temperature	t <sub>p</sub>	5-8 seconds max.	3-6 seconds max.		
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second		
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second		
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second		
Time 25 °C to 25 °C		4 minutes	4 minutes		
Applied cycles		1 cycle max.			

refer to EN61760-1:2006

B O OYE !	Nus 💪 (Cac)	CHECKED ZAn	REVISION 001.002	DATE (YYYY-MM-DD) 2025-03-06	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD	
ROHS REACH HALOGEN FREE		DESCRIPTION WL-OC	WL-OCTR Optocoupler Triac				
WÜRTH ELEKTRONIK	Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany					ORDER CODE 142301260	11
MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE DIP 6			BUSINESS UNIT eiPal	status Valid	PAGE 11/15

#### **Further information**

#### **Component Libraries:**



3D\_WL-OCTR\_NZC\_Standard



Altium\_WL-OCTR (24b)



Cadence\_WL-OCTR (24a)



Eagle\_WL-OCTR (24a)



IGS\_WLOCTR\_NZC\_Standard



STP\_WL-OCTR\_NZC\_Standard

#### Free Sample Order:

Order free samples of this article directly here!

#### **REDEXPERT:**

Find the suitable optocoupler in REDEXPERT



#### **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of Optoelectronic Components of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This optoelectronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Optoelectronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The optoelectronic component is designed and manufactured to be used within the datasheet specified values. If the usage and
  operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the
  authority of the customer. All technical specifications for standard products also apply to customer specific products.
- Unless Würth Elektroik has given its express consent, the customer is under no circumstances entitled to reverse engineer, disassemble
  or otherwise attempt to extract knowledge or design information from the optoelectronic component.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- The soldering pad pattern shown above is a general recommendation for the easy assembly of optoelectronic components. If a high
  degree of precision is required for the selected application (i.e. high density assembly), the customer must ensure that the soldering pad
  pattern is optimized accordingly.

#### **Cleaning and Washing:**

Washing agents used during the production to clean the customer application might damage or change the characteristics of the
optoelectronic component body, marking or plating. Washing agents may have a negative effect on the long-term functionality of the
product.

Using a brush during the cleaning process may break the optoelectronic component body. Therefore, we do not recommend using a
brush during the PCB cleaning process.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the optoelectronic component body, pins or termination. Expansion could
damage the components. We recommend a manual inspection after potting to avoid these effects.

#### **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer
  degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of
  shipment.
- Do not expose the optoelectronic component to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is
  also recommended to return the optoelectronic component to the original moisture proof bag and reseal the moisture proof bag again.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging:


The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is
lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured

#### Handling:

- Violation of the technical product specifications such as exceeding thel rated current, will void the warranty.
- The product design may influence the automatic optical inspection.
- Certain optoelectronic component surfaces consist of soft material. Pressure on the top surface has to be handled carefully to prevent negative influence to the function and reliability of the optoelectronic components.
- ESD prevention methods need to be applied for manual handling and processing by machinery.
- Resistors for protection are obligatory.
- In addition to optoelectronic components testing, products incorporating these devices have to comply with the safety precautions given
  in IEC 60825-1, IEC 62471 and IEC 62778.

#### **Technical specification:**


The typical and/or calculated values and graphics of technical parameters can only reflect statistical figures. The actual parameters of
each single product, may differ from the typical and/or calculated values or the typical characteristic line.

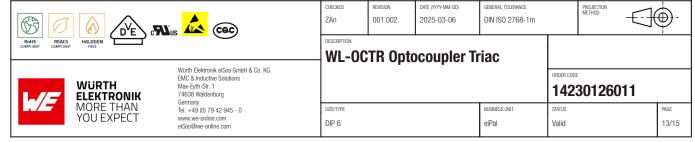

- In the characteristics curves, all values given in dotted lines may show a higher deviation than the paramters mentioned above.
- On each reel, only one bin is sorted and taped. The bin is defined on the current transfer ratio.
- In order to ensure highest availability, the reel binning of standard deliveries can vary. A single bin cannot be ordered. Please contact us
  in advance, if you need a particular bin sorting before placing your order.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

The customer has the sole responsibility to ensure that he uses the latest version of this datasheet, which is available on Würth Elektronik's homepage. Unless otherwise agreed in writing (i.e. customer specific specification), changes to the content of this datasheet may occur without notice, provided that the changes do not have a significant effect on the usability of the optoelectronic components.

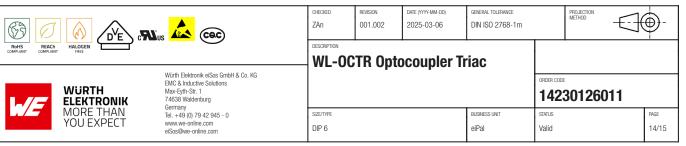

### **Important Notes**

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

