

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

## **Pattern Properties:**

Properties	Value	Unit	Tol.					
Panel Thickness	4.5	mm	max.					
Panel Nut Tightening Torque	1 - 1.4	N*m						
Panel Nut Thread	M12							
PCB Thickness	1.6	mm						

# **Article Properties:**

F	Polarity	5		0	
			11	Г	7

# **Kind Properties:**

Gender	Male
Coding	А
Durability	100 Mating cycles

## **Material Properties:**

	-
Insulator Material	PBT
Insulator Flammability Rating	UL94 V-0
Insulator Color	Black
Contact Material	Copper Alloy
Contact Plating	Gold
Shell Material	Zinc Alloy
Shell Plating	Nickel

# **General Information:**

Operating Temperature	-40 up to +90 °C
Ingress Protection Code	IP68

# **Electrical Properties:**

Properties		Test conditions	Value	Unit	Tol.
Rated Current	I <sub>R</sub>		5	A	
Working Voltage			60	V	
<b>Contact Resistance Initial</b>	R		10	mΩ	max.
Withstanding Voltage		1 min	1000	V (AC)	
Insulation Resistance	R <sub>ISO</sub>		100	MΩ	min.


## **Certification:**

l	RoHS Approval	Compliant [2011/65/EU&2015/863]
	REACh Approval	Conform or declared [(EC)1907/2006]
l	cULus Approval	E522986

		CHECKED CPo	REVISION 001.004	DATE (YYYY-MM-DD) 2023-11-30	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	<b>•</b> -
RoHS REACh COMPLIANT COMPLIANT	With Filler States Orchild Orch KO	WR-CIRC M12 Screw - Coding A -						
	Mala Lexitoline ecos Ghibri & Go. Ka EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Panel F	PCB			ORDER CODE	70100305	
YOU EXPECT	Tel. +49 (0) 79 42 945 - 0	SIZE/TYPE			BUSINESS UNIT eiCan	status Valid		page 2/7


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## Packaging Specification - Inner Carton: [mm]

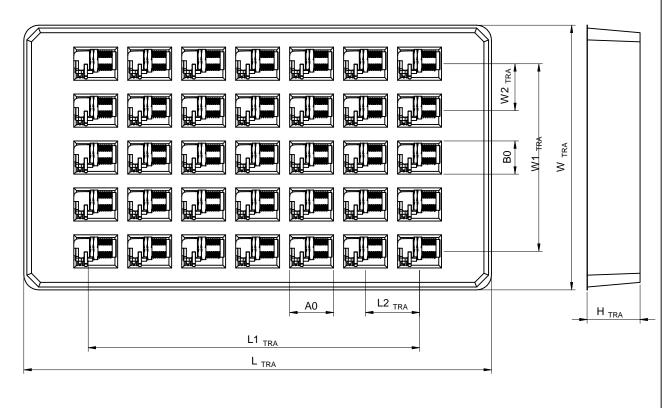

NB: Actual packaging may slightly differ from datasheet

L <sub>TRA</sub> (m	וm)	L1 <sub>TRA</sub> (mm)	L2 <sub>TRA</sub> (mm)	W <sub>TRA</sub> (mm)	W1 <sub>TRA</sub> (mm)	W2 <sub>TRA</sub> (mm)	A0 <sub>(mm)</sub>	B0 <sub>(mm)</sub>	H <sub>TRA</sub> (mm)	Packaging Unit	Material
typ.		typ.	typ.	typ.	typ.	typ.	typ.	typ.	typ.	pcs.	
309		214	37	175	124	31	29	22	35	35	Plastic

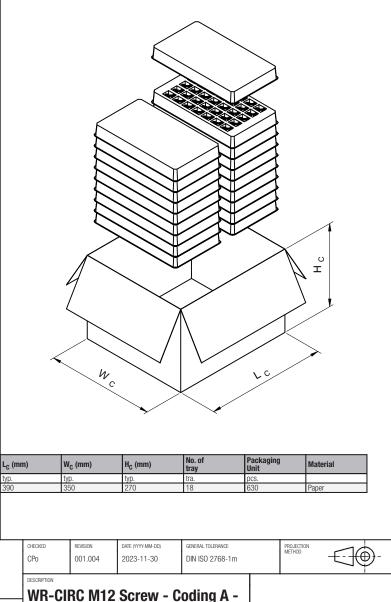

Revis COMPLANT REACH COMPLANT			CP0         001.004         2023-11-30         DIN ISO 2768-1m           DESCRIPTION         WR-CIRC M12 Screw - Coding A -         -					METHOD	<b>(</b> )-
	WÜRTH ELEKTRONIK	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyh-Str. 1 74638 Waldenburg	Panel I		SCIEW - U	oung A -	ORDER CODE	270100305	
	MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE Screw_A_Pane	el		BUSINESS UNIT eiCan	status Valid		PAGE 3/7

390

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on use in equipment. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability intended on user and reliability intended about the intent of such usage before the design-in stage. In addition, sufficient reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and rel

## **Classification Wave Soldering Profile:**



---- max temperature procedure

## **Classification Wave Soldering Profile:**

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	T <sub>s min</sub>	100 °C	100 °C
Preheat Temperature Typical	T <sub>s typical</sub>	120 °C	120 °C
Preheat Temperature Max	T <sub>s max</sub>	130 °C	130 °C
Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$	t <sub>s</sub>	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak Temperature	Т <sub>р</sub>	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25 °C to 25 °C		4 minutes	4 minutes

refer to EN61760-1:2006

	BelS         BEACh COMPLIANY         DEACh COMPLIANY           Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions			снескер СРо	REVISION 001.004		PROJECTION METHOD	 €		
			WR-CI		Screw - C	oding A -	ORDER CODE			
	MORE THAN		Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	SIZE/TYPE			BUSINESS UNIT	643 STATUS	270100	 PAGE
		TUUEAPEUT	www.we-online.com eiSos@we-online.com	Screw_A_Pane	el		eiCan	Valid		4/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## **Further information**

#### **Component Libraries:**



#### Free Sample Order:

Order free samples of this article directly here!

	WURTH ELEKTRONIK MORE THAN YOU EXPECT	EMC & Inductive Solutions Mar-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	SIZE/TYPE Screw A Pan	SZE/TYPE BUSINESS UNIT			OFDER CODE 643270100305 STATUS PAGE Valid 5/7			
RoHS REACH COMPLIANT Wurth Elektronik elSos GmbH & Co. KG EMC & Instructive Solutions		WR-CIRC M12 Screw - Coding A - Panel PCB					ORDER CODE			
			CHECKED CPo	REVISION 001.004	DATE (YYYY-MM-DD) 2023-11-30	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	-	€-

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of the Connectors of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

- This mechanical component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Mechanical components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The mechanical component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the component may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Prevent any damage or scratches on the component, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.
- The mechanical component is designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot ensure the reliability of these components while being used with other products.

#### **Product Specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- · All other soldering methods are at the customers' own risk.

#### **Cleaning and Washing:**

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the component, body, pins and termination. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process may deform function relevant areas. Therefore, we do not recommend using a brush during the PCB cleaning process.

#### **Potting and Coating:**

• If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking could lead to an incomplete seal, allowing contaminants into the components. Expansion could damage the components. We recommend a manual inspection after potting or coating to avoid these effects.

#### **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- · Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### **Packaging:**

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- Do not repeatedly operate the component with excessive force. It may damage or deform the component resulting in malfunction.
- In the case a product requires particular handling precautions, in addition to the general recommendations mentioned here before, these
  will appear on the product datasheet.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.
- All specified data applies as long as the connector is correctly mated and locked. Forpanel connectors, the connector has to be correctly
  mounted on the panel of an appropriate enclosure.
- Do not mate or unmate the connectors under load. Non-respect of this criteria or inappropriate use can result in personal injury. Do not use for hot plug.
- If the connector is used outdoors, extra UV light and corrosion protection must be considered.
- If the connector is mounted on a metallic panel, galvanic corrosion of the connector through the panel material must be avoided.
- If the connector is soldered on a PCB, the PCB must be fixed in order to avoid undesired movements.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

			CHECKED CPo	REVISION 001.004	DATE (YYYY-MM-DD) 2023-11-30	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	$\square$	€-
			WR-CIRC M12 Screw - Coding A -							
	WÜRTH ELEKTRONIK MORE THAN	Germany Tel. +49 (0) 79 42 945 - 0	Panel	PCB			ORDER CODE	2701003	05	
	MORE THAN YOU EXPECT		SIZE/TYPE Screw_A_Pan	el		BUSINESS UNIT eiCan	status Valid		1	page 6/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

			CHECKED CPo	REVISION 001.004	DATE (YYYY-MM-DD) 2023-11-30	GENERAL TOLERANCE DIN ISO 2768-1m			<b>_</b> -	
			WR-CI	RC M12	Screw - C					
	L/5	WÜRTH ELEKTRONIK	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Panel	PCB			ORDER CODE	70100305	PAGE
	. / -	MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/TYPE Screw_A_Pan	el		BUSINESS UNIT eiCan	status Valid		PAGE 7/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that require high reliability and reliability introdictions or performance.