

## **Dimensions:** [mm]


WARNING: START ON THE TOP RIGHT CORNER End 8 8 8 8 8 ⊟ ۰ 6 3,81 0,8 x 0,4

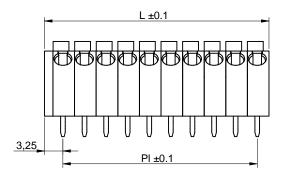

	12 ±0.1
--	---------

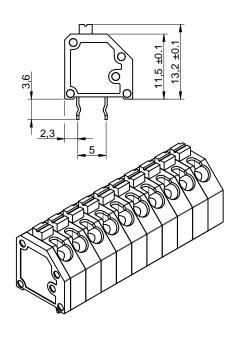

## **Recommended Hole Pattern: [mm]**

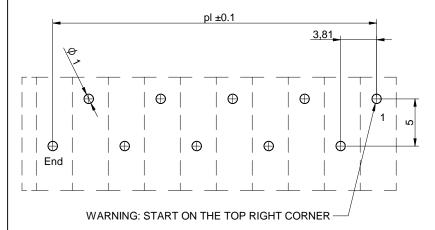

## **Pattern Properties:**

Properties		Value	Unit
Pin to Pin (Middle)	р <sub>I</sub>	22.86	mm

 $\oplus$ 

PAGE

1/5

BUSINESS UNIT

## **Article Properties:**

Properties		Value	Unit
Pins		7	
Pin to Pin (Middle)	Ρ <sub>Ι</sub>	22.86	mm
Length	L	28.17	mm

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions		CREATED XIa	CHECKED Fbr		general tolerance DIN ISO 2768-1m		PROJECTION METHOD	÷
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	 	Serie 412 45° Entry			Screwless	ORDER CODE		
www.we-online.com eiSos@we-online.com						69141	23200	07M
	<u> </u>	R	REVISION	STATUS		DATE (YYYY-MM-DD	0	BUSINESS UN
		0	001.002	Valid		2017-07-19		eiCan

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

## **Article Properties:**

Pins	PI	L	Order Code
2	3.81 mm	9.12 mm	691412320002M
3	7.62 mm	12.93 mm	691412320003M
4	11.43 mm	16.74 mm	691412320004M
5	15.24 mm	20.55 mm	691412320005M
6	19.05 mm	24.36 mm	691412320006M
7	22.86 mm	28.17 mm	691412320007M
8	26.67 mm	31.98 mm	691412320008M
9	30.48 mm	35.79 mm	691412320009M
10	34.29 mm	39.60 mm	691412320010M
11	38.10 mm	44.41 mm	691412320011M
12	41.91 mm	47.22 mm	691412320012M

## **Kind Properties:**

Properties	Value				
Standard Polarities <sup>1)</sup>		02;03;04;05;06;07;08;09;10;11;12			
Pitch	Р	3.81	mm		

<sup>1)</sup> Delivery ex stock for standard polarities, non standard have extended leadtimes

## **Material Properties:**

Insulator Material	PA6/66
Insulator Flammability Rating	UL94 V-0
Insulator Color	Grey
Contact Material	Phosphor Bronze
Contact Plating	Tin
Wire Guard	Phosphor Bronze with Tin

# **General Properties:**

Operating Temperature	-30 °C up to +120 °C
Compliance	Lead free / RoHS

## **Electrical Properties:**

Properties	Test conditions		Va	lue	— Unit
Flopernes			UL	VDE	
Rated Current		I <sub>R</sub>	4	4	А
Working Voltage			300	450	V (AC)
Withstanding Voltage	1 min		1600	2500	V (AC)
Contact Resistance		R	20		mΩ

## **Mechanical Properties:**

Wire Strip Length         7 (mm)	
----------------------------------	--

## Wire Properties:

Solid Wire Section (Imperial)	16 to 30 (AWG)
Solid Wire Section (Metric)	1.31 to 0.05 (mm <sup>2</sup> )
Stranded Wire Section (Imperial)	16 to 30 (AWG)
Stranded Wire Section (Metric)	1.31 to 0.05 (mm <sup>2</sup> )

## Standard:

UL Approval	E150931 Cat No. MRT24 (3)
VDE Approval	40013441 Type MRT24


## **Packaging Properties:**

Packaging	Вох

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED XIa	CHECKED Fbr		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD			
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Serie 4123 M - 3.81mm Screwless							-
www.we-online.com eiSos@we-online.com		45° Entry WR-TBL				ORDER CODE	23200	07M	
=			evision 01.002	status Valid		DATE (YYYY-MM-DE 2017-07-19	,	BUSINESS UNIT eiCan	PAGE 2/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektr

## **Classification Wave Soldering Profile:**

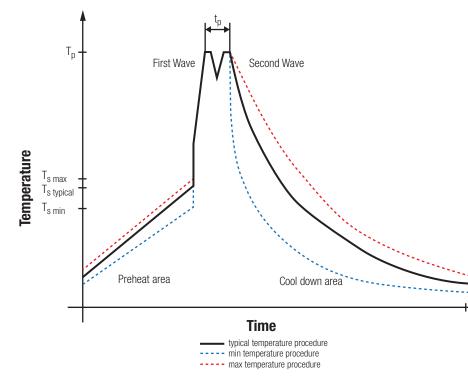

## **Classification Wave Soldering Profile:**

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min <sup>1)</sup>	T <sub>s min</sub>	100 °C	100 °C
Preheat Temperature Typical	T <sub>s typical</sub>	120 °C	120 °C
Preheat Temperature Max	T <sub>s max</sub>	130 °C	130 °C
Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$	t <sub>s</sub>	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak temperature	Т <sub>р</sub>	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25°C to 25°C		4 minutes	4 minutes

<sup>1)</sup> refer to EN61760-1:2006 refer to EN61760-1:2006



This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivalent is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc.. Wurth Elektronik elSos GmbH & Co KG must be information intended to use is electronic component which is used in electrical circuits there adjust high standard is especially caused in the electronic component which is used in electrical circuits there are electrical circuits th

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product services of the Connectors of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

- This electronic component is designed and developed with the intention for use in general electronics equipment.
- Before incorporating the components into any equipment in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.
- In addition, even electronic component in general electronic equipment, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed by the user before usage.
- The connector is designed and manufactured to be used within the datasheet specified values.
- Do not use the connector outside the datasheet specifications.
- Prevent any damage or scratches on the connector, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specification for standard products do also apply to customer specific products.
- The Connectors are designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot insure the
  reliability of these components while being used with other products.

### **Product Specific:**

#### Soldering:

- The solder profile must comply with the WE technical soldering specification, otherwise this will void the warranty.
- Other soldering methods are not verified and have to be validated by the customer at his own risk.

#### Cleaning and Washing:

- · Parts are not constructed for washing, so washing can cause malfunction afterwards.
- Cleaning agent that are used to clean the customer applications might damage or change the characteristics of the component, body, pins and termination.
- Please do not submerse our washable products into water or cleaning agents or put them in locations exposed to water completely.
- When cleaning by hand (brushing), please do not use excessive force on our connectors to avoid malfunction afterwards, because customer could deform function relevant areas.
- We recommended a solution without organic acid (preserve the plating against corrosion) volatile, without residues and compatible with the plastic.

• We recommend to perform tests and to let a part in immersion in the solution 8 to 12 hours and see if there is a degradation.

#### Storage Conditions:

 The Connectors are considered MSL1 into closed original packaging and are not subject to storage time limits regarding the moisture sensivity but all products shall be used before the end of the period of 12 months based on the products date code, if not 100% solderability can't be warranted.

Handling:

- Do not repeatedly operate the connector with excessive force. It may damage or deforms the contact dome which results in malfunction.
- In the case a product requires particular handling precautions, in addition to the general recommendations mentioned here before, these will appear on the product datasheet.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED	CHECKED Fbr		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	Serie 4123 M - 3.81mm Screwless						·	
www.we-online.com	45° Entry WR-TBL				ORDER CODE 691412320007M			
		1510N 1.002	status Valid		DATE (YYYY-MM-DD 2017-07-19	·	BUSINESS UNIT eiCan	PAGE 4/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivable information network etc... Wurth Elektronic expectent or expected to cause severe personal injury or death, unless the particular drust the informed on every lectronic component which is used in electrical circuits that require high safety and reliability functions or performance.

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

## 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

## 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED XIa	CHECKED Fbr		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD			
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0		Serie 4123 M - 3.81mm Screwless 45° Entry WR-TBL					-		
www.we-online.com eiSos@we-online.com	45° Entry	L.		ORDER CODE 691412320007M					
			REVISION 001.002	status Valid		DATE (YYYY-MM-DE 2017-07-19	,	BUSINESS UNIT eiCan	PAGE 5/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential tracium signal, advantine, transportation (automotive control, train control, ship control), train control, ship control, train control, train control, train control, ship control, train control, ship control, train control, trai