
Dimensions: [mm]

Pin 1

Marking

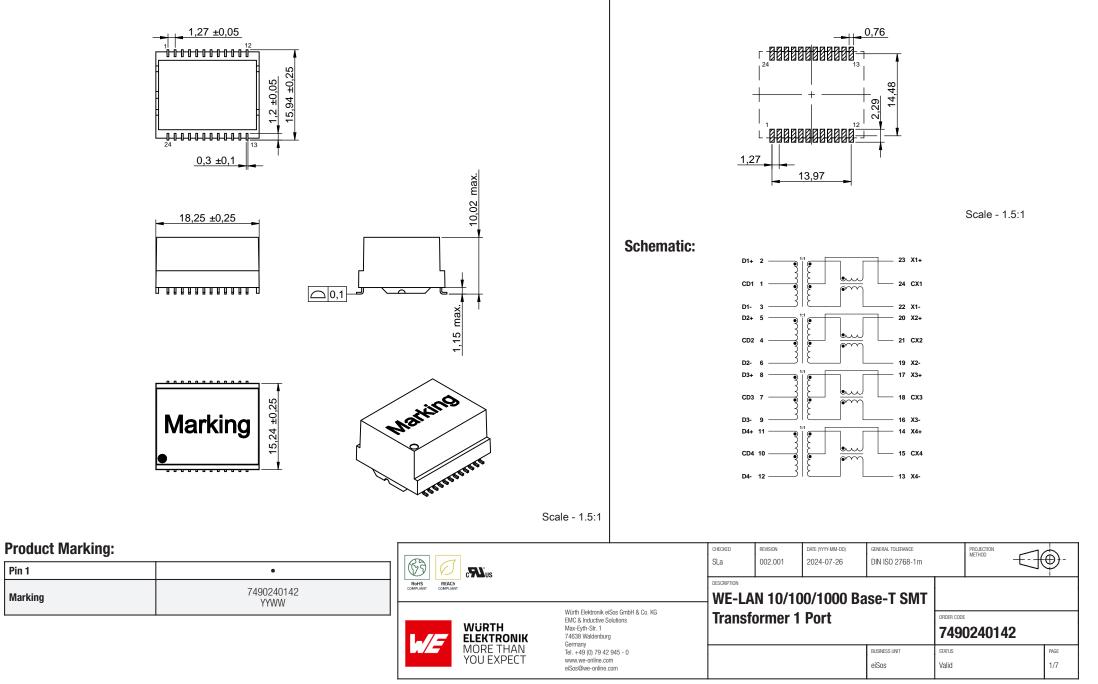

Recommended Land Pattern: [mm]

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Electrical Properties:

Properties		Test conditions	Value	Unit	Tol.
Inductance	L	100 kHz / 100 mV @ 8 mA	350	μH	min.
Insulation Test Voltage	V _T	1 min.	4000	V (RMS)	min.
DC Resistance	R _{DC}	@ 20 °C	1300	mΩ	max.
Insertion Loss	IL	1-100 MHz	-1.2	dB	max.
Return Loss	RL	1-30 MHz @ 100 Ω	-14	dB	min.
Return Loss	RL	30-60 MHz @ 100 Ω	-12	dB	min.
Return Loss	RL	60-80 MHz @ 100 Ω	-9	dB	min.
Return Loss	RL	80-100 MHz @ 100 Ω	-8	dB	min.
Differential to Common Mode Rejection Ratio	DCMR	1-30 MHz	-35	dB	min.
Differential to Common Mode Rejection Ratio	DCMR	30-60 MHz	-32	dB	min.
Differential to Common Mode Rejection Ratio	DCMR	60-100 MHz	-30	dB	min.
Crosstalk	CT	1-60 MHz	-35	dB	min.
Crosstalk	CT	60-100 MHz	-30	dB	min.
Turns Ratio	n		1:1		±2%
Data rate		1(000 Base-T		
Clearance distance	CI		6	mm	min.
Creepage distance	Cr		10.5	mm	min.

General Information:

It is recommended that the temperature of the component does not exceed +85°C under worst case conditions									
Fulfils IEC60601 requirements for 2xMOPP for working voltage up to 250 Vrms.									
Fulfils IEC	60601 requirements for 1xMOPP for working voltage up to 600 Vrms.								
Operating Temperature	-40 °C up to +85 °C								
Storage Conditions (in original packaging)	< 40 °C; < 75 % RH								

General Information:

Moisture Sensitivity Level (MSL)	1
Test conditi	ons of Electrical Properties: +20 °C, 33 % RH if not specified differently

Certification:

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
cURus Approval	E535145 [UL-60601-1]

		CHECKED	REVISION 002.001	DATE (YYYY-MM-DD) 2024-07-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	_ -		
RoHS REACH COMPLIANT COMPLIANT			WE-LA	N 10/10	0/1000 Ba	se-T SMT		-		
	WURTH ELEKTRONIK	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Transf	ormer 1	Port		ORDER CODE	0240142		
	MORE THAN YOU EXPECT	einnany Tel. +43 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eiSos	status Valid		PAGE 2/7	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for uses in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in areas such as military, aerospace, availation, nucleac exception signal, disaster prevention, medical, public information retwork etc... Warth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the require high safety and reliability functions or performance.

Packaging Specification - Tape: [mm] Packaging Specification - Reel: [mm] K0 D0 А W3_ 111 $\Phi \Phi \Phi$ Ð Ð Ф $\oplus \oplus \oplus \oplus \oplus$ **\$** W1 <u>_</u>___ ____ close to center B B Ð Ð - (+) ŝ ≥ ~ z С 12 Top Cover 5 Tape $\oplus \oplus \oplus \oplus \oplus \oplus$ Ð Ð $\oplus \oplus \oplus$ Ð Ð Ð Ð Ð $\oplus \oplus$ Ð Ð Ð Ð D0 D1 P1 А 2 T2 A0 detail B Carrier Tape Cover Tape B Feeding direction -End Start Chip Cavity Cover Tape Sprocket Hole **~ ~ ~ ~ ~ + + + + + +** ()) (44 12-2 20 120 S----------~ *** • • • ************ * + + No Component Components No Component Embossment min. 160mm min. 100mm Cover Tape min. 400mm Packaging is referred to the international standard IEC 60286-3:2019 Packaging is referred to the international standard IEC 60286-3:2019 D0 / 2 DO W3 T2 KU P2 W2 W3 Таре Туре Material Material (mm) (mm) (mm) (mm) (mm) (pcs.) (mm) (mm)(mm) (mm) (mm) (mm (mm) (mm) (mm) (mm (mm) (mm) (mm (mm (mm) (mm)(mm) (mm)(mm)(mm) (mm ±0,05 ref. +0.15 +0.1 ±0,1 ±0,1 +0,05/-0,0 +0.1+0.1±0,3 Max. +0,1/-0,0min +0.1+0.1min min min nin +2,0max. max. 15 50 18 50 32.00 0.50 0.10 12.00 10.30 4.00 24.00 2.00 1 50 2.00 0.20 1.75 28.40 14.20 Polystyrene 240 330.00 1 50 12.80 20.20 80.00 32.40 38 40 31.90 35.40 Polystyrene CHECKED GENERAL TOLERANCE PROJECTION METHOD REVISION DATE (YYYY-MM-DD) Ð F SLa 002.001 2024-07-26 DIN ISO 2768-1m **C**US 165° - 180° DESCRIPTION RoHS COMPLIANT REACh WE-LAN 10/100/1000 Base-T SMT Würth Elektronik eiSos GmbH & Co. KG **Transformer 1 Port** ORDER CODE EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 7490240142 74638 Waldenburg **ELEKTRONIK**

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic aircuits that are univers and reliability and reliability intronices or performance.

MORE THAN

YOU EXPECT

Pull-off force

0,1 N - 1,3 N

32 mm

Tape width

Germany

Tel. +49 (0) 79 42 945 - 0

www.we-online.com

eiSos@we-online.com

BUSINESS UNIT

eiSos

STATUS

Valid

PAGE

3/7

Classification Reflow Profile for SMT components:



Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min T _{s mi}		150 °C
Preheat Temperature Max	T _{s max}	200 °C
Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$	t _s	60 - 120 seconds
Ramp-up Rate (T _L to T _P)		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time t_L maintained above T_L	tL	60 - 150 seconds
Peak package body temperature	Т _р	$T_p \le T_c$, see Table below
Time within 5°C of actual peak temperature	t _p	20 - 30 seconds
Ramp-down Rate (T _P to T _L) Time 25°C to peak temperature		6 °C/ second max.
		8 minutes max.

refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature (T_c):

Properties	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly I Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly I Package Thickness > 2.5 mm	250 °C	245 °C	245 °C

refer to IPC/ JEDEC J-STD-020E

Rohis cometant cometant Wurth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions		SLa 002.001 2024-07-26 DIN ISO 2768-1m DESCRIPTION WE-LAN 10/100/1000 Base-T SMT Transformer 1 Port								
	RTH KTRONIK RE THAN J EXPECT	Max-Eyh-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eISOS	749 status Valid	0240142		PAGE 4/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Further information

Component Libraries:

Altium WE-LAN (24a)

Downloads_CADENCE_WE-LAN (24a)

- Cadstar_WE-LAN (20a)
- Eagle_WE-LAN (24a)
- Download_IGS_7490240142
- PSpice_WE-LAN (23a)
- S-Parameter_7490240142 (23a)
- Download_STP_7490240142

Free Sample Order:

Order free samples of this article directly here!

Tutorials:

- High Performance Low EMI Series (PDF)
- The LAN-PoE Connection (PDF)
- Connecting LAN Transformers (PDF)

High Voltage LAN Transformers (PDF)

REDEXPERT:

Calculate losses for 7490240142 in REDEXPERT

			002.001	2024-07-26	DIN ISO 2768-1m	PROJECTION METHOD		€-
RoHS REACH COMPLIANT COMPLIANT	Würth Elektronik eiSos GmbH & Co. KG				ase-T SMT			
	EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Irans	former 1	l Port		ORDER CODE 74902401	42	
MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eiSos	status Valid		page 5/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on use in equipment. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability intended on user and reliability intended about the intent of such usage before the design-in stage. In addition, sufficient reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and re

Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-LAN of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and developed with the intention for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
 specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
 Elektronik does not guarantee any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
 sustainability over time.
- The customer is responsible for the functionality of their own products. All technical specifications for standard products also apply to customer specific products.

Product specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- Strong forces which may affect the coplanarity of the components' electrical connection with the PCB (i.e. pins), can damage the part, resulting in a void of the warranty.

Cleaning and Washing:

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the wire
 insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process could break the wire due to its small diameter. Therefore, we do not recommend using a
 brush during the PCB cleaning process.

Potting:

If the product is potted in the costumer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components. We recommend a
manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- · Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals might result in audible noise due to the magnetostrictive material properties.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

			CHECKED SLa	REVISION 002.001	DATE (YYYY-MM-DD) 2024-07-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		₽-	
			WE-LAN 10/100/1000 Base-T SMT								
	L-//5	WURTH ELEKTRONIK	Wurth Elektronik elsos simbir & Co. Na EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Transf	ormer 1	Port		ORDER CODE)24014	2	
		MORE THAN YOU EXPECT	einnany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		1	PAGE 6/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such asgebefore the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that reliability and indiability functions or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

			CHECKED SLa	REVISION 002.001	DATE (YYYY-MM-DD) 2024-07-26	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	€-	
			WE-LAN 10/100/1000 Base-T SMT							
	Würth Elektronik elsos GmbH & Co. KG EMC & Inductive Solutions Max-Eyrh-Str. 1 74638 Waldenburg Gremany		Transf	ormer 1	Port	_	ORDER CODE)240142		
		MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		page 7/7

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.