


WE-CMB, WE-CMBH

Common Mode Power Line Choke

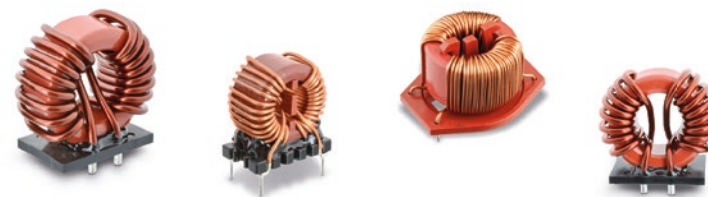

XL

744 825 120 1	744 825 603 3	744 825 605	744 825 510	744 825 320
L: 1 mH	L: 3.3 mH	L: 5 mH	L: 10 mH	L: 20 mH
I _R : 12 A	I _R : 6 A	I _R : 6 A	I _R : 5 A	I _R : 3 A
R _{DC} : 9 mΩ	R _{DC} : 25 mΩ	R _{DC} : 45 mΩ	R _{DC} : 55 mΩ	R _{DC} : 160 mΩ

XL

744 825 433
L: 33 mH
I _R : 3 A
R _{DC} : 210 mΩ

XXL

744 826 350 5	744 826 251 0	744 826 201 3	744 826 141 8
L: 0.5 mH	L: 1 mH	L: 1.3 mH	L: 1.8 mH
I _R : 35 A	I _R : 25 A	I _R : 20 A	I _R : 14 A
R _{DC} : 2.3 mΩ	R _{DC} : 4.5 mΩ	R _{DC} : 6.2 mΩ	R _{DC} : 9.5 mΩ

L

744 834 101	744 834 622	744 834 433	744 834 405	744 834 407
L: 1 mH	L: 2.2 mH	L: 3.3 mH	L: 5 mH	L: 7 mH
I _R : 10 A	I _R : 6 A	I _R : 5 A	I _R : 4 A	I _R : 3.5 A
R _{DC} : 12.5 mΩ	R _{DC} : 22 mΩ	R _{DC} : 37 mΩ	R _{DC} : 50 mΩ	R _{DC} : 80 mΩ

■ WE-CMB
■ WE-CMBH

EMC COMPONENTS | INDUCTORS | TRANSFORMERS | RF COMPONENTS | CIRCUIT PROTECTION | EMC SHIELDING MATERIAL | CONNECTORS | SWITCHES | ASSEMBLY TECHNIQUE | POWER ELEMENTS

Important information: Würth Elektronik's design kits contain reference components. These components correspond with the current product development status on the day of supply. Exchange of the reference components to components with up-to-date product development status is not carried out automatically. No liability is taken for the use of these reference components. Therefore, please request new samples prior to releases for series production and product release.

Please check datasheets on www.we-online.com for specifications. Würth Elektronik eiSos GmbH & Co. KG, EMC & Inductive Solutions. © 2014

www.we-online.com

**All products
in stock!**