




Recommended Hole Pattern: [mm]



Electrical Properties:

Properties		Test conditions	Value	Unit	Tol.
Inductance Base ¹⁾	L _{BASE}	10 kHz/ 100 mV	280	μΗ	min.
Turns Ratio	n		1:1:1:1:1:1		
Rated Current Base ²⁾	I _{R BASE}	$\Delta T = 40 \text{ K}$	2.5	А	typ.
Saturation Current Base ³⁾	I _{SAT BASE}	$ \Delta L/L < 10$ %	0.22	А	typ.
DC Resistance Base ⁴⁾	R _{DC BASE}	@ 20 °C	51	mΩ	max.
Leakage Inductance Base	L _{S Base}	100 kHz/ 100 mV	0.32	μH	typ.
Insulation Test Voltage ⁵⁾	V _T	3 mA/ 1 s	500	V (AC)	

¹⁾ Inductance of a single winding
 ²⁾ Rated Current of a a single winding
 ³⁾ Saturation Current of a single winding when all windings are driven. If not all windings are driven, the Saturation Current per winding is 6 x I_{SAT BASE} / number of driven windings.
 ⁴⁾ DC Resistance of a single winding
 ⁵⁾ Insulation test voltage: between all windings

Certification:

Scale - 1:1,5

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]

General Information:

Operating Temperature	-40 up to +125 °C				
Storage Conditions (in original packaging)	< 40 °C; < 75 % RH				
Storage Conditions (for single parts)	-40 up to +85 °C				
Moisture Sensitivity Level (MSL)	1				
Test conditions of Electrical Properties: +20 °C, 33 % RH if not specified diffe					

GENERAL TOLERANCE

PROJECTION METHOD

max. N2 N5 39,62 10 14 6 2 6 • N3 N6 Scale - 1:1,5 9 13 **Product Marking:** Pin 1 ٠ 749197201 GÐ Marking Lot and date code RoHS COMPLIANT REACH

一了了

Η ΗН max.

31,49

min

N 4 Schematic:

3

12 5

N1

N/4

.

	IKK	002.003	2023-05-14	DIN ISO 2768-1m			
			ovible Tree	oformor			
Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Mar-Eyth-Str. 1			for DC/DC Converter				
74638 Waldenburg Germany						-	
Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE ETD34			BUSINESS UNIT	Valid	PAGE 1/6	
	EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tell. +49 (0) 79 42 945 - 0 www.ve-online.com	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	Wirth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	Wirth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Mac-FfLEX+ Flexible Trail for DC/DC Converter 74388 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	Würth Elektronik eißes GmbH & Co. KG DESCRIPTION Würth Elektronik eißes GmbH & Co. KG EMCE Auductive Solutions Max-Eyth-Str. 1 Tradas Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 Www.we-online.com SZE/TYPE	Wirth Elektronik elSos GmbH & Co. KG WE-FLEX+ Flexible Transformer Mitch Elektronik elSos GmbH & Co. KG For DC/DC Converter Mac-Strt-Str. 1 Order Code 74638 Waldenburg Germany Germany SZE/TYPE Business unit STATUS www.ve-online.com FT024	


REVISION

DATE (YYYY-MM-DD)

CHECKED

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos Gov to the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos Growth & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that are undire and reliability introducts or performance.

Packaging Specification - Tray: [mm]

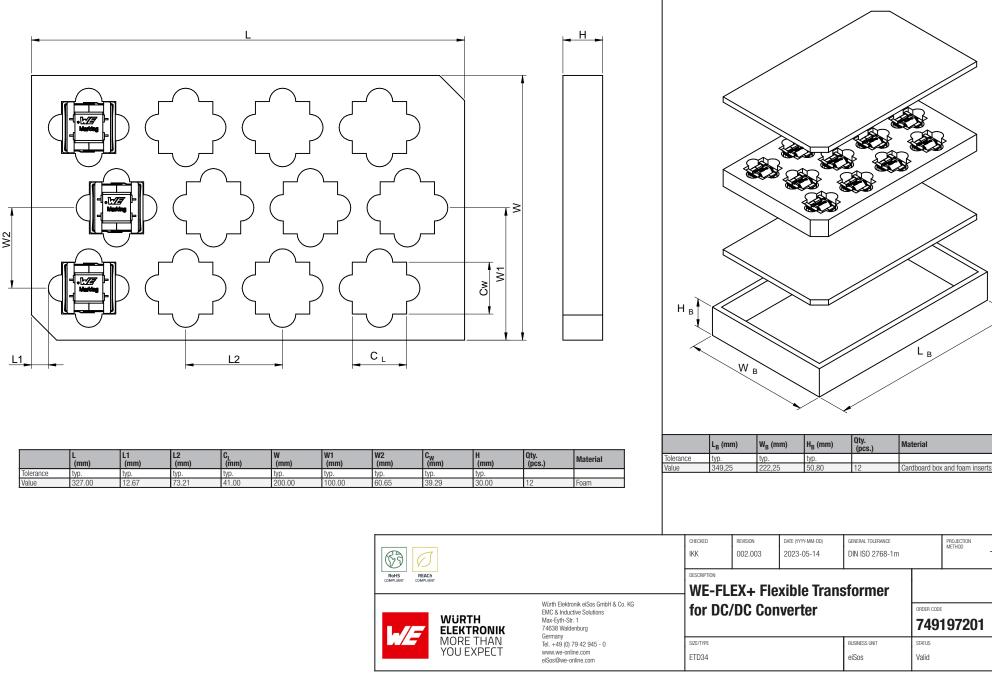


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

 \oplus

PAGE 2/6

Value

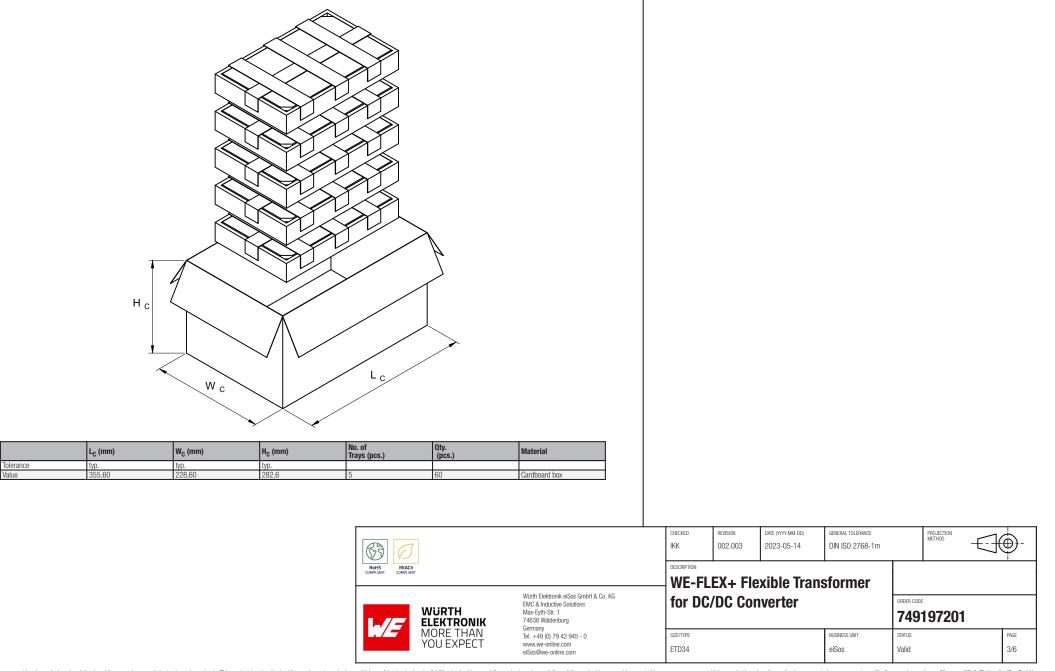

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Classification Wave Soldering Profile:



---- max temperature procedure

Classification Wave Soldering Profile:

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly		
Preheat Temperature Min		100 °C	100 °C		
Preheat Temperature Typical	T _{s typical}	120 °C	120 °C		
Preheat Temperature Max	T _{s max}	130 °C	130 °C		
Preheat Time t_s from T_{smin} to T_{smax}	t _s	70 seconds	70 seconds		
Ramp-up Rate	ΔT	150 °C max.	150 °C max.		
Peak Temperature	Т _р	250 °C - 260 °C	235 °C - 260 °C		
Time of actual peak temperature tp Ramp-down Rate, Min Ramp-down Rate, Typical Ramp-down Rate, Max		max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave		
		~ 2 K/ second	~ 2 K/ second		
		~ 3.5 K/ second	~ 3.5 K/ second		
		~ 5 K/ second	~ 5 K/ second		
Time 25 °C to 25 °C		4 minutes	4 minutes		

refer to EN61760-1:2006

B 0		CHECKED	REVISION 002.003	DATE (YYYY-MM-DD) 2023-05-14	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	$- \bigcirc ($	€-
ROHS REACH COMPLIANT COMPLIANT			WE-FLEX+ Flexible Transformer for DC/DC Converter						
		for DC					ORDER CODE 749197201		
MORE TH YOU EXP	Tel. +49 (0) 79 42 945 - 0	SIZE/TYPE ETD34			BUSINESS UNIT eiSos	status Valid			PAGE 4/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-FLEX+ of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
 specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, as the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
 Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektronik's specifications, for its validity and
 sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.

Product specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.

Cleaning and Washing:

Washing agents used during the production to clean the customer application might damage or change the characteristics of the wire
insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the component. We recommend a
manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- · Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals may result in audible noise due to the magnetostrictive material properties.
- Due to heavy weight of the components, strong forces and high accelerations may have the effect to damage the electrical connection
 or to harm the circuit board and will void the warranty.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

E			CHECKED	REVISION 002.003	DATE (YYYY-MM-DD) 2023-05-14	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	$-\bigcirc$	€-	
						xible Trans	sformer				
			Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	for DC/DC Converter				ORDER CODE 749197201			
	MUH	RE THAN EXPECT	Tel. +44 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE ETD34			BUSINESS UNIT eiSos	status Valid		1	PAGE 5/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

			CHECKED	REVISION 002.003	DATE (YYYY-MM-DD) 2023-05-14	general tolerance DIN ISO 2768-1m		PROJECTION METHOD]@-	-	
ROHS REACH COMPLIANT COMPLIANT	MPLINT COMPLINT			EX+ Fle							
		Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germanv	for DC/DC Converter					ORDER CODE 749197201			
	DRE THAN U EXPECT	Tel. +44 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE ETD34			BUSINESS UNIT eiSos	status Valid		PAGE 6/6		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.