#### 9,3 4.7 2,3 0,15 က +1 $1,14 \pm 0,38$ 3,05 $7.94 \pm 0.19$ $^{1)}$ 8.3 ms single half-sine wave or equivalent square wave. Duty cycle = 4 pulses per minute $^{2)}$ Mounted on 5.0 mm x 5.0 mm (0.03 mm thick) Copper Pads to each terminal Scale - 4:1 **Certification:** $6,86 \pm 0,25$ **RoHS Approval** Compliant [2011/65/EU&2015/863] Schematic: **REACh Approval** Conform or declared [(EC)1907/2006] **Halogen Free** Conform [JEDEC JS709B] Cathode **Halogen Free** Conform [IEC 61249-2-21] $2,34 \pm 0,28$ ±0,3 UL497B: E478010, UL 1449: E332875 **UL Approval** 2,5 **Plastic Housing Flammability** UL94 V-0 Rating $5,9 \pm 0,32$ **General Information:** ...... Marking **Operating Temperature** -65 up to +150 °C Storage Conditions (in original < 40 °C; < 75 % RH packaging) Cathode Band Moisture Sensitivity Level (MSL) 1 Anode Test conditions of Electrical Properties: +20 °C, 33 % RH if not specified differently Scale - 4:1 **Product Marking:** PFG Marking CHECKED GENERAL TOLERANCE PROJECTION METHOD REVISION DATE (YYYY-MM-DD) B PXu 001.003 2023-11-24 DIN ISO 2768-1m **91**° DESCRIPTION TECHNICAL REFERENCE RoHS REACh HALOGEN **WE-TVSP** Power TVS Diode SMDJ28A Würth Elektronik eiSos GmbH & Co. KG ORDER CODE EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 824550281 **ELEKTRONIK** 74638 Waldenburg Germany MORE THAN Tel. +49 (0) 79 42 945 - 0 SIZE/TYPE BUSINESS UNIT STATUS PAGE YOU EXPECT www.we-online.com D0-214AB Valid 1/9 eiSos eiSos@we-online.com


This electronic component has been designed and developed for usage in general electronic equipment only. This product is neasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH Co KG products are neither designed nor intended for use in rarsportation, submarine, transportation, transported transportation, transportation, transportation, transportati

## **Recommended Land Pattern: [mm]**

## **Flectrical Properties**

	Test conditions	Value	Unit	Tol.		
V <sub>DC</sub>		28	V	max.		
V <sub>BR</sub>	1 mA	32.75	V	±5%		
V <sub>Clamp</sub>	I <sub>PEAK</sub>	45.4	V	max.		
I <sub>Peak</sub>	10/1000 µs	66.1	A	max.		
I <sub>Peak</sub>		300	A	max.		
I <sub>Leak</sub>	V <sub>DC</sub>	2	μA	max.		
P <sub>Diss</sub>	$T_A = 50 \ ^\circ C$	6.5	W	max.		
P <sub>Diss</sub>	10/1000 µs	3000	W	max.		
	Unidirectional					
	V <sub>BR</sub> V <sub>Clamp</sub> I <sub>Peak</sub> I <sub>Peak</sub> I <sub>Leak</sub>	$\begin{array}{c c} V_{DC} & & \\ \hline V_{BR} & 1 \mbox{ mA} & \\ \hline V_{Clamp} & I_{PEAK} & \\ \hline I_{Peak} & 10/1000 \mbox{ \mus} & \\ \hline I_{Peak} & & \\ \hline I_{Leak} & V_{DC} & \\ \hline P_{Diss} & T_A = 50 \mbox{ °C} & \\ \hline P_{Diss} & 10/1000 \mbox{ \mus} & \\ \end{array}$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	$\begin{array}{c c c c c c c c c c c c c c c c c c c $		


### Maximum Peak Pulse Power Rating:

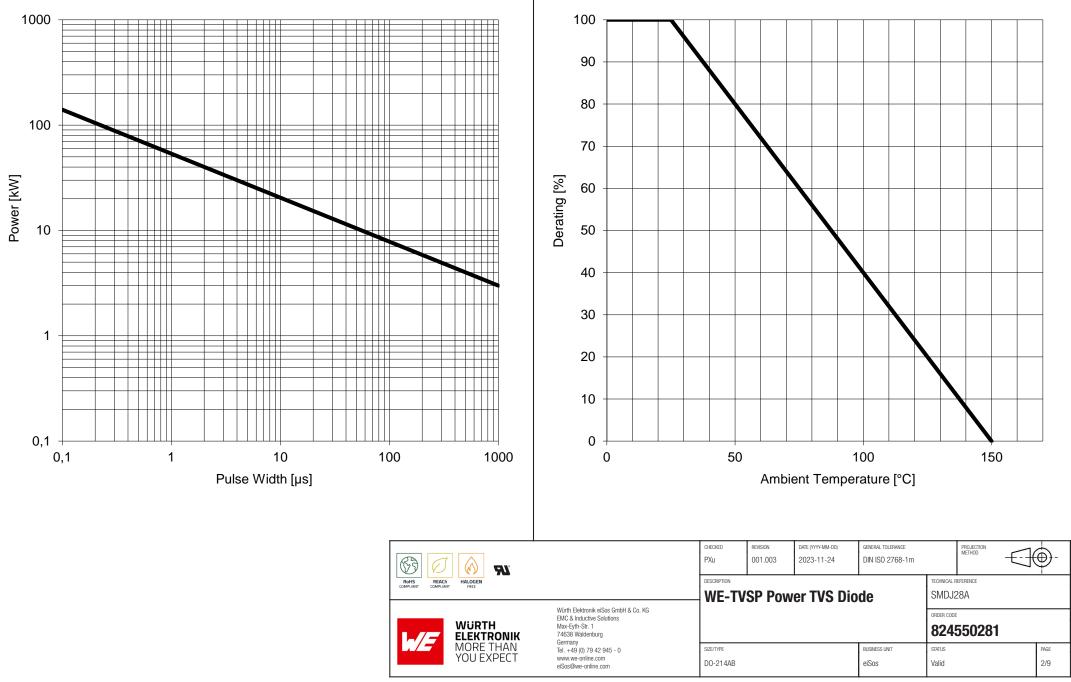

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Peak Pulse Power and Current Derating:


## **Steady State Power Dissipation Derating:**

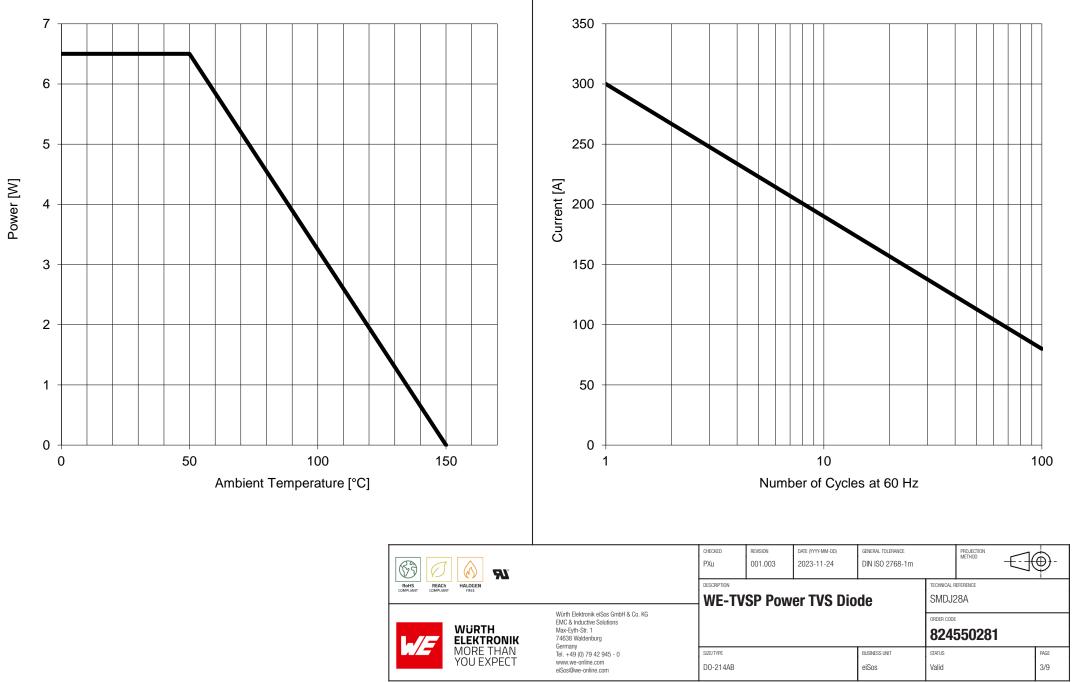

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Maximum Non-Repetitive Forward Surge Current:

## **Typical Junction Capacitance:**

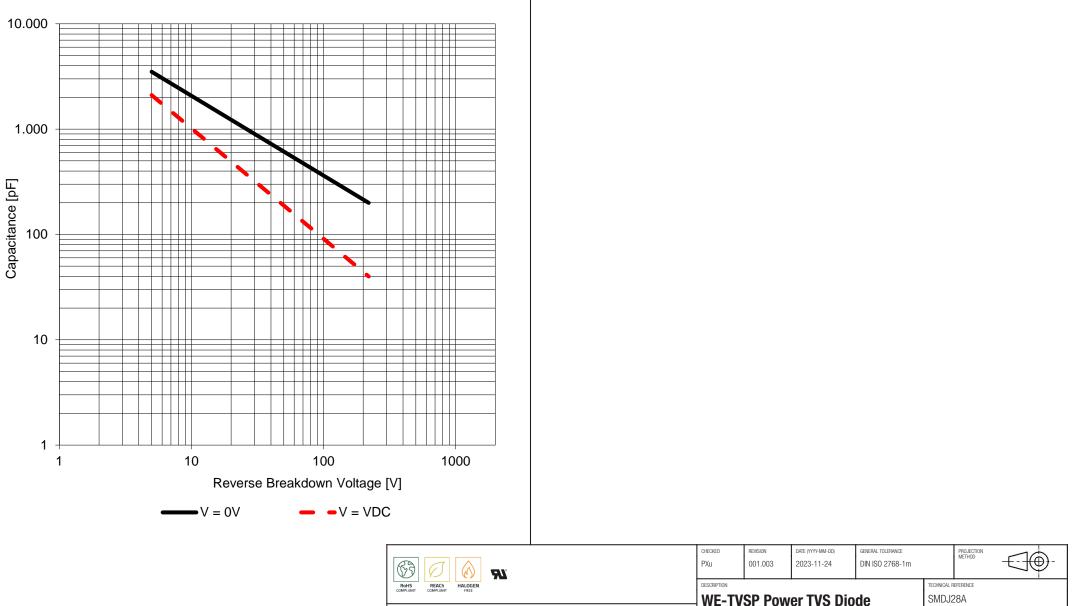

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

WURTH ELEKTRONIK

MORE THAN YOU EXPECT Würth Elektronik eiSos GmbH & Co. KG

SIZE/TYPE

DO-214AB

EMC & Inductive Solutions

Tel. +49 (0) 79 42 945 - 0 www.we-online.com

eiSos@we-online.com

Max-Eyth-Str. 1

74638 Waldenburg Germany ORDER CODE

STATUS

Valid

BUSINESS UNIT


eiSos

824550281

PAGE 4/9

## Packaging Specification - Tape: [mm]

### Packaging Specification - Reel: [mm]

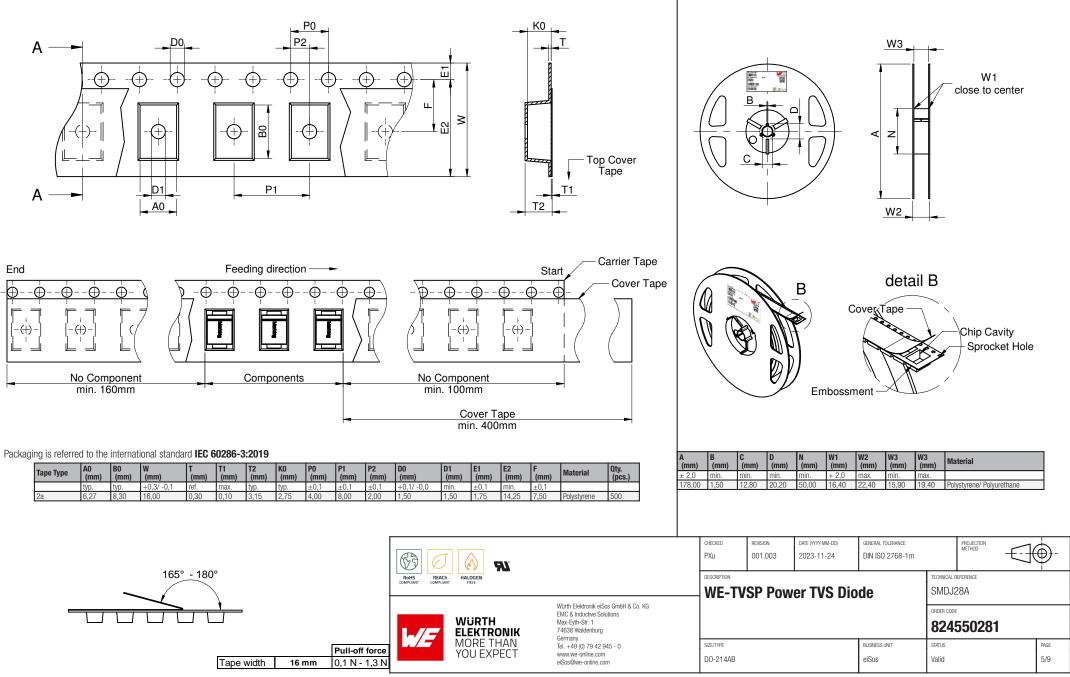

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic aircuits that are univers and reliability and reliability intronices or performance.

## **Classification Reflow Profile for SMT components:**



## **Classification Reflow Soldering Profile:**

Profile Feature		Value
Preheat Temperature Min	T <sub>s min</sub>	150 °C
Preheat Temperature Max	T <sub>s max</sub>	200 °C
Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$	t <sub>s</sub>	60 - 120 seconds
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time $t_L$ maintained above $T_L$	tL	60 - 150 seconds
Peak package body temperature	Т <sub>р</sub>	$T_p \leq T_c$ , see Table below
Time within 5°C of actual peak temperature	t <sub>p</sub>	20 - 30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

refer to IPC/ JEDEC J-STD-020E

## Package Classification Reflow Temperature (T<sub>c</sub>):

Properties	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly   Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly I Package Thickness > 2.5 mm	250 °C	245 °C	245 °C

refer to IPC/ JEDEC J-STD-020E

		CHECKED PXu	REVISION 001.003	DATE (YYYY-MM-DD) 2023-11-24	general tolerance DIN ISO 2768-1m	-	PROJECTION METHOD	$\square$	€-
		WE-TVSP Power TVS Diode				technical reference SMDJ28A			
WüRTH ELEKTRONIK BLEKTRONIK KORTH ELEKTRONIK Max-Eyth-Str. 1 74338 Waldenburg Germany						ORDER CODE	550281		
MORE THAN YOU EXPECT	einnary Tel. + 49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	size/type DO-214AB			BUSINESS UNIT eiSos	status Valid		1	page 6/9

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

## **Further information**

#### **Component Libraries:**

## Altium\_WE-TVSP (22b)

Downloads\_CADENCE\_WE-TVSP (20c)

Cadstar\_WE-TVSP (20b)

Eagle\_WE-TVSP (20b)

Download\_IGS\_WE-TVSP-D0214AB-Unidirectional

Download\_STP\_WE-TVSP-DO-214AB-Unidirectional

#### Free Sample Order:

Order free samples of this article directly here!

#### **Tutorials:**

- Applications of EMC Components (PDF)
- ESD and Surge Protection (PDF)

k	WURTH ELEKTRONIK MORE THAN YOU EXPECT	Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSne@we-online.com	SIZE/TYPE D0-214AB			BUSINESS UNIT eiSos	824	550281		PAGE 7/9
	RoHS COMPLIANT COMPLIANT HALOGEN FREE Würth Elektronik eiSos GmbH & Co. KG FMC & Inductive Solutions		WE-TV	SP Pow	er TVS Dio	de	SMDJ2 ORDER CODE	-		
			DESCRIPTION						TECHNICAL REFERENCE	
		PXu	001.003	2023-11-24	DIN ISO 2768-1m		METHOD	$-\Box$	⊕-	
			CHECKED	REVISION	DATE (YYYY-MM-DD)	GENERAL TOLERANCE		PROJECTION		1

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

## **Cautions & Warnings:**

# The following conditions apply to all goods within the product series of WE-TVSP of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This electronic component is designed and developed with the intention for use in general electronic equipment.
- Würth Elektronik must be asked for a written approval (following the certain PPAP procedure) before incorporating the components into any equipment in the field such as military, aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheets specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customer's own risk.

#### **Cleaning and Washing:**

 Washing agents used during the production to clean the customer application might damage or change the characteristics of the body, the marking or the plating. Washing agent may have a negative effect on the long term functionality of the product.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the component body, pins or termination. Expansion could damage the
components. We recommend a manual inspection after potting to avoid these effects.

#### **Storage Conditions**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- · Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- The TVSP Diode is not designed for voltage stabilization with continuous power dissipation.
- The exposure of steam, saline spray, atmosphere with reduced oxygen content, corrosive gases, rain or condensation and direct sunlight shall be prohibited.
- Signals operated continuously with a high ratio of direct-current voltage might have an influence on the product life time
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

		CHECKED PXu	REVISION 001.003	DATE (YYYY-MM-DD) 2023-11-24	general tolerance DIN ISO 2768-1m		PROJECTION METHOD			
		WE-TVSP Power TVS Diode				TECHNICAL REFERENCE SMDJ28A				
	Würth Eektonik elsos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 ELEEKTRONIK 74638 Waldenburg Germany					_	ORDER CODE	550281		
	./-	MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE DO-214AB			BUSINESS UNIT eiSos	status Valid		PAGE 8/9

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

COMPLIANT COMPLIANT FREE		CHECKED PXu	REVISION 001.003	DATE (YYYY-MM-DD) 2023-11-24	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	<b>-</b>
		WE-TVSP Power TVS Diode					TECHNICAL REFERENCE	
Würth Elektronik eißos GmbH & Co. KG EMC & Inductive Solutions WURTH Max-Eyth-Str. 1 ELEKTRONIK 74638 Waldenburg Germany			01 1 0 00		uc	ORDER CODE	550281	
MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	size/type D0-214AB			BUSINESS UNIT eiSos	status Valid		PAGE 9/9

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.