

Support Note

Expected Lifetime of Aluminum Electrolytic and Aluminum Polymer Capacitor



SN008 // FRANK PUHANE

The life cycle of a capacitor depends on many factors of the application. An important factor is the temperature or rather thermal load, as it is responsible for the fact that internal structures age over time and the electrical properties deteriorate. This results in increased leakage current, increasing the ESR, which in turn leads to a further increase of the temperature. The reason for the temperature increase is the power loss generated by the ESR. If these limits are not exceeded, high lifetime expectancies are possible when the inner temperature load of the component is in a lower range. For liquid electrolytic capacitors, the expected lifetime doubles when the temperature at the component is reduced by 10 °C (Eq. 2).

For polymer electrolytic capacitors, the life increases tenfold when the temperature at the component is reduced by 20 °C (Eq. 1)

Formula for aluminum polymer capacitors:

$$L_x = L_{nom} \cdot 10^{\frac{T_0 - T_a}{20}} \quad (\text{Eq. 1})$$

Formula for aluminium electrolytic capacitors:

$$L_x = L_{nom} \cdot 2^{\frac{T_0 - T_a}{10}} \quad (\text{Eq. 2})$$

To further illustrate this, the calculated lifetime values are shown in Table 1 with some example temperature values. Here, the maximum specified component temperature is used to compare aluminum electrolytic and aluminum polymer capacitors.

Temperature	Aluminum Polymer Capacitor	Aluminum Electrolytic Capacitor	Factor Polymer vs. Electrolytic
105 °C	2.000 h	2.000 h	1.00
95 °C	6.300 h	4.000 h	1.58
85 °C	20.000 h	8.000 h	2.50
75 °C	63.000 h	16.000 h	2.94
65 °C	200.000 h	32.000 h	5.25

Table 1: Lifetime overview with different ambient temperatures

The application temperature is defined in the formulas (Eq. 1) and (Eq. 2) as the ambient temperature T_a . The hour's definition at 105 °C in the two following columns for the aluminum polymer and aluminum electrolytic capacitor is the nominal lifetime of the component L_{nom} . This is linked to the maximum specified temperature at the component and is defined as T_0 . The other hours in the table are the calculated lifetimes L_x using the formulas (Eq. 1) and (Eq. 2). The calculated factor in the last column is the relation between the calculated lifetime for aluminium electrolytic and aluminium polymer capacitors. In the aluminum polymer capacitor column, the calculated lifetime is 200.000 h at 65 °C ambient temperature. This means a theoretical lifetime of 22 years. The typical maximum expected lifetime, which is defined by different vendor, is

between 13 and 15 years. Furthermore, you can clearly see in this table at which ambient temperature aluminum polymer capacitors have their advantage in lifetime. If the specified component temperature for aluminum electrolytic and aluminum polymer capacitors is the same (for example 2000 h at 105 °C), it can be seen at 95 °C the polymer electrolytic capacitor has a longer lifetime. Only in cases of aluminum electrolytic capacitors with a long specified lifetime at the maximum specified component, temperature (for example 5000 h at 105 °C) has a higher intersection point but the point of intersection will always occur (see Fig. 1). The specified hours in this diagram are always the nominal lifetime value of the component at this temperature.

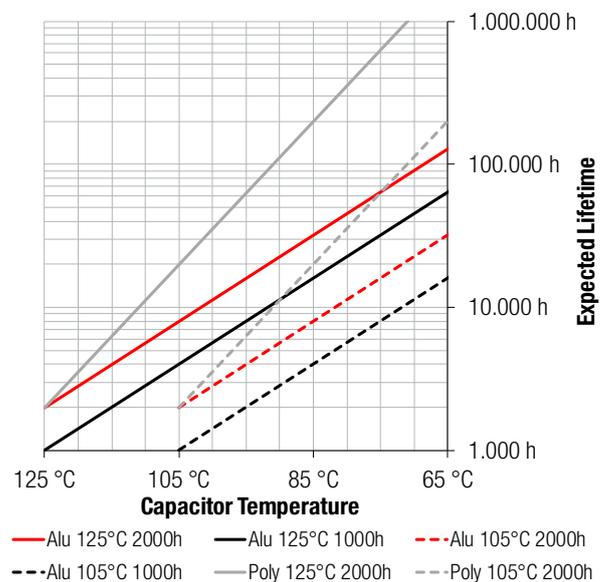


Figure 1: Overview of the expected lifetime of aluminum electrolyte and aluminum polymer capacitors

Support Note

Expected Lifetime of Aluminum Electrolytic and Aluminum Polymer Capacitor



IMPORTANT NOTICE

The Application Note is based on our knowledge and experience of typical requirements concerning these areas. It serves as general guidance and should not be construed as a commitment for the suitability for customer applications by Würth Elektronik eiSos GmbH & Co. KG. The information in the Application Note is subject to change without notice. This document and parts thereof must not be reproduced or copied without written permission, and contents thereof must not be imparted to a third party nor be used for any unauthorized purpose.

Würth Elektronik eiSos GmbH & Co. KG and its subsidiaries and affiliates (WE) are not liable for application assistance of any kind. Customers may use WE's assistance and product recommendations for their applications and design. The responsibility for the applicability and use of WE Products in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate and investigate, where appropriate, and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

The technical specifications are stated in the current data sheet of the products. Therefore the customers shall use the data sheets and are cautioned to verify that data sheets are current. The current data sheets can be downloaded at www.we-online.com. Customers shall strictly observe any product-specific notes, cautions and warnings. WE reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services.

WE DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT,

COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH WE PRODUCTS OR SERVICES ARE USED. INFORMATION PUBLISHED BY WE REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WE TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

WE products are not authorized for use in safety-critical applications, or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, WE products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Customers shall inform WE about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or health, customers must ensure that they have all necessary expertise in the safety and regulatory ramifications of their applications. Customers acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of WE products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by WE.

CUSTOMERS SHALL INDEMNIFY WE AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WE PRODUCTS IN SUCH SAFETY-CRITICAL APPLICATIONS.

USEFUL LINKS



Application Notes

www.we-online.com/appnotes



REDEXPERT Design Tool

www.we-online.com/redexpert



Toolbox

www.we-online.com/toolbox



Produkt Katalog

www.we-online.com/products

CONTACT INFORMATION

appnotes@we-online.com

Tel. +49 7942 945 - 0



Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1 · 74638 Waldenburg · Germany



www.we-online.com