


Bobbin Packages

RM10

10-Terminal EXT, THT, Vertical

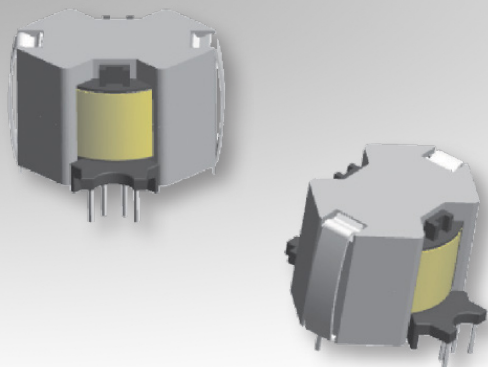

Characteristics:

This TH RM10 package was developed for special safety cases and compact footprint requirements. It features self-shielding cores for EMI improvement, large core cross-sectional area for high power density, and many terminals for multiple outputs, split coils, or parallel high current winds.

Applications:


- Offline
- Industrial controls
- Lighting
- White goods
- Telecom
- Charging
- Stand-by power

Technical Data:

Order Code	Type of Insulation	Winding Width (mm)	Winding Build (mm)	Winding Perimeter (mm)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	Core Order Code (Power)
070-6920	Reinforced	10.49	4.29	38.61	90	44	3960	150-2624


Order Code	L (mm)	W (mm)	H (mm)	G (mm)
070-6920	31.5 max.	31.5 max.	20.5 max.	2.29 min.

Estimated Maximum Power Level:

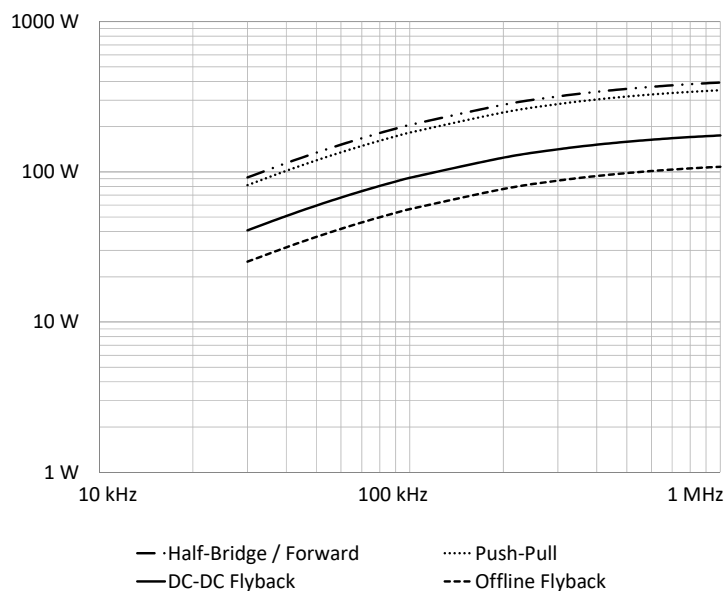

All curves are DC-DC unless otherwise noted. For offline applications, the power level must be derated as shown in the flyback curves.

Dimensions:

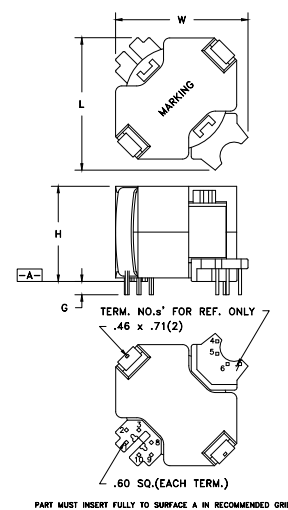

Footprint (mm):

